


SAW FILTER FOR Bluetooth

Murata part number : SAFEA2G44AA0F00

Package Dimensions

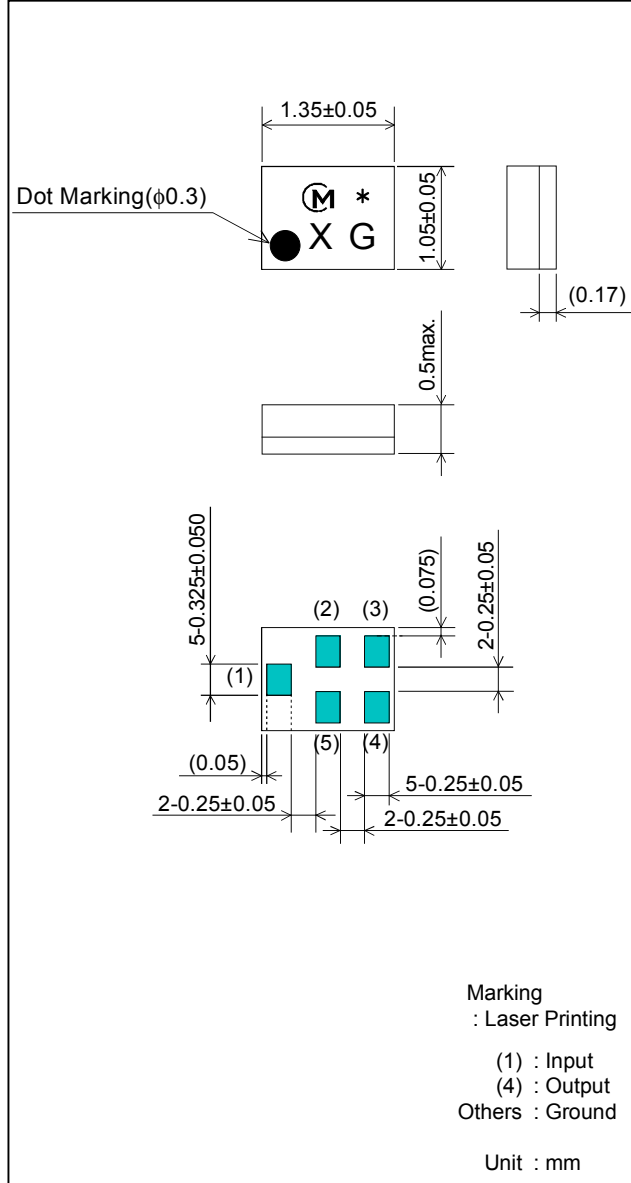


Specification

Item	Specification		
	-30 to 85°C	25±2°C	typ.
Nominal Center Frequency(fc)	2441.75MHz		
Insertion Loss (2400 to 2483.5MHz)	2.8 dB max.	2.5 dB max.	2.0 dB
Absolute Attenuation			
1) 0.1 to 960 MHz	35 dB min.	35 dB min.	39 dB
2) 1570 to 1990 MHz	32 dB min.	32 dB min.	38 dB
3) 2110 to 2170 MHz	30 dB min.	30 dB min.	38 dB
4) 2170 to 2300 MHz	25 dB min.	25 dB min.	34 dB
5) 2300 to 2320 MHz	25 dB min.	25 dB min.	33 dB
6) 2320 to 2345 MHz	18 dB min.	18 dB min.	25 dB
7) 2345 to 2365 MHz	10 dB min.	10 dB min.	22 dB
8) 2550 to 2800 MHz	15 dB min.	15 dB min.	22 dB
9) 2800 to 4000 MHz	25 dB min.	25 dB min.	31 dB
10) 4000 to 5000 MHz	30 dB min.	30 dB min.	39 dB
11) 5000 to 6000 MHz	25 dB min.	25 dB min.	34 dB
Ripple Deviation (2400 to 2483.5MHz)	1.5dB max.	1.2dB max.	0.7 dB
VSWR (2400 to 2483.5MHz)	2.4 max.	2.3 max.	2.0
Input/Output Impedance (nominal)	50Ω		
Input Signal Level	10mW (+10dBm), 8000 hours		

SAW FILTER FOR Bluetooth

Murata part number : SAFEA2G44AA0F00


■ Frequency Performance

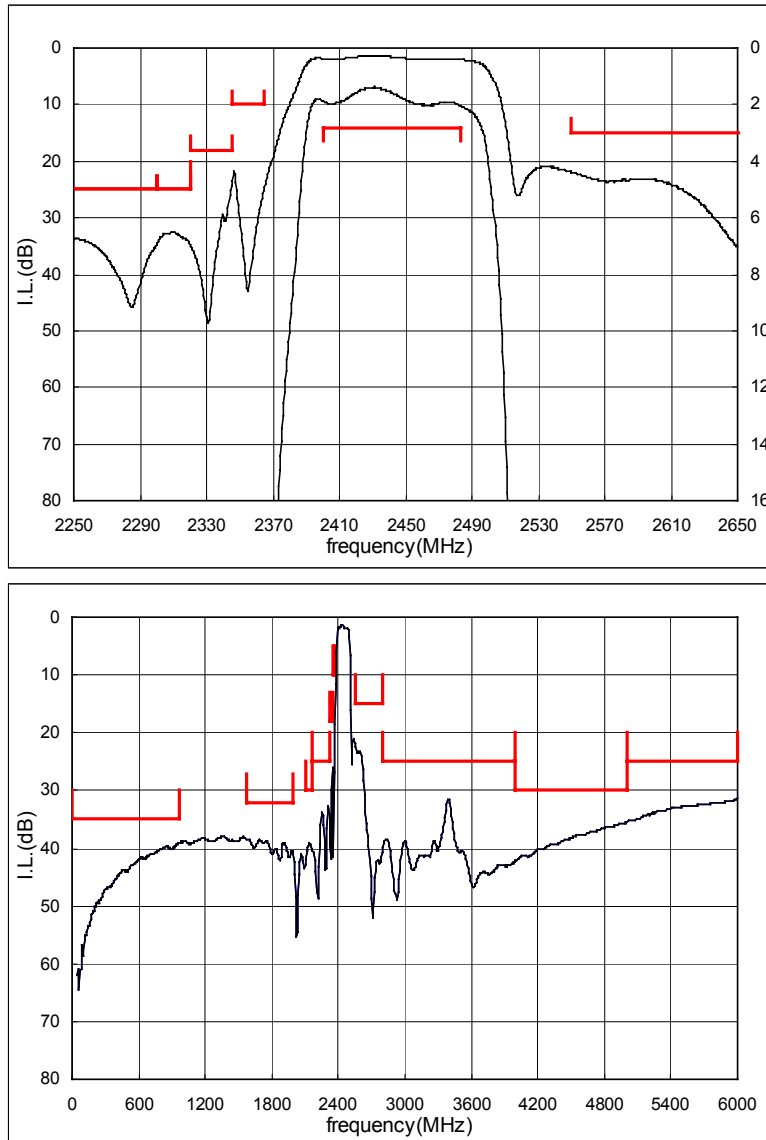


SAW FILTER FOR Bluetooth

Murata part number : SAFEA2G44AA0F00

■ Dimensions of Carrier Tape

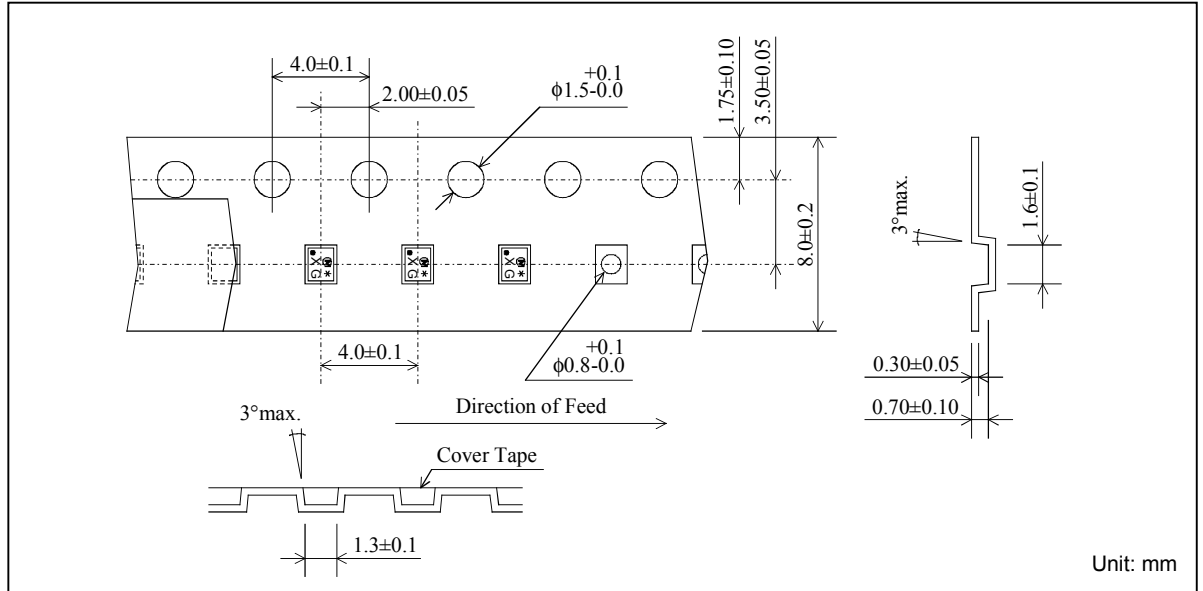

■ Dimensions of Tape

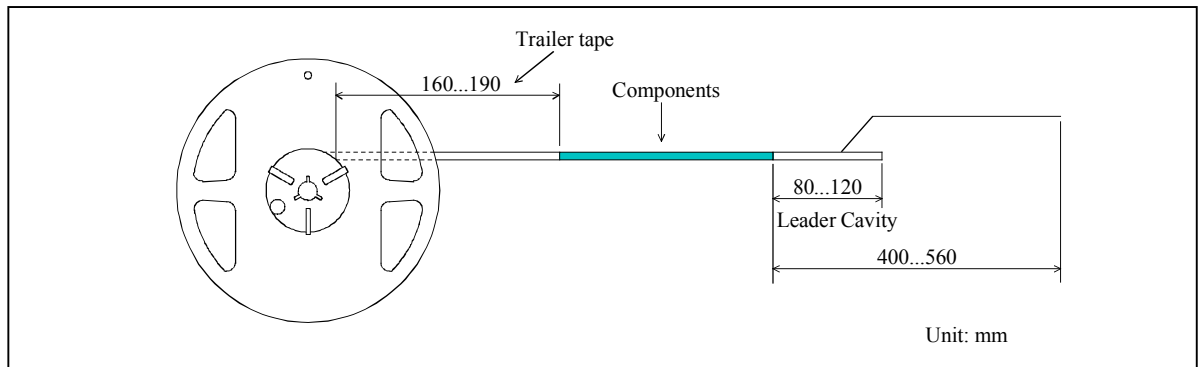

■ Dimensions of Reel

