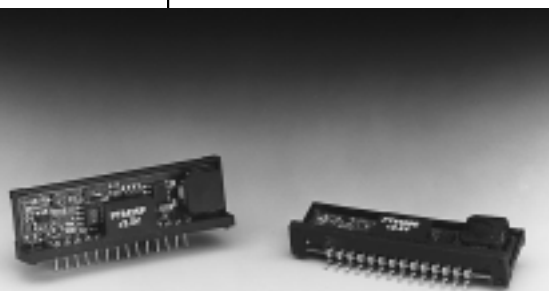
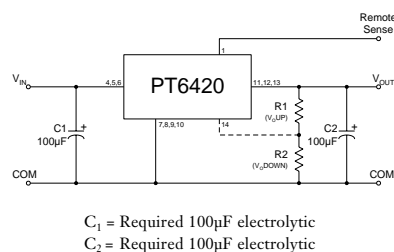


PT6420 Series**3 AMP ADJUSTABLE INTEGRATED SWITCHING REGULATOR****Revised 5/15/98**

- Adjustable Output Voltage
- 85% Efficiency
- Small SIP Footprint
- Input Voltage Range: 4.5V to 5.5V
- Remote Sense Capability

The PT6420 is a new addition to the Power Trends high performance +5V to +3.3V, 3Amp family of 14-Pin SIP (Single In-line Package) Integrated Switching Regulators (ISRs). Only two external capacitors are required for proper operation.

Please note that this product does not include short circuit protection.

Standard Application**Pin-Out Information**


| Pin | Function |
|-----|------------------|
| 1 | Remote Sense |
| 2 | Do not connect |
| 3 | Do not connect |
| 4 | V_{in} |
| 5 | V_{in} |
| 6 | V_{in} |
| 7 | GND |
| 8 | GND |
| 9 | GND |
| 10 | GND |
| 11 | V_{out} |
| 12 | V_{out} |
| 13 | V_{out} |
| 14 | V_{out} Adjust |

Ordering Information

| | |
|---------|--------------|
| PT6424□ | = +1.5 Volts |
| PT6425□ | = +3.3 Volts |
| PT6426□ | = +1.8 Volts |
| PT6427□ | = +2.1 Volts |
| PT6428□ | = +1.2 Volts |
| PT6429□ | = +2.5 Volts |

PT Series Suffix (PT1234X)**Case/Pin Configuration**

| | |
|--------------------------|----------|
| Vertical Through-Hole | P |
| Horizontal Through-Hole | D |
| Horizontal Surface Mount | E |



Note: Back surface of product is conducting metal.

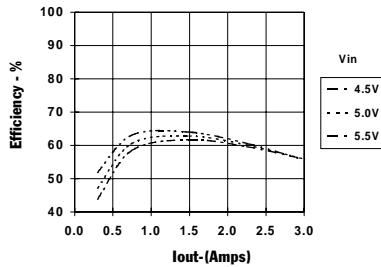
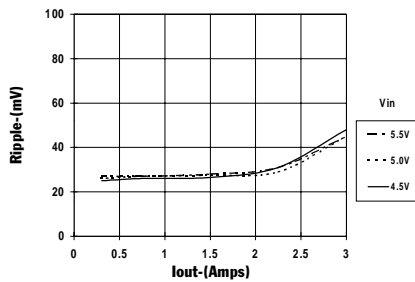
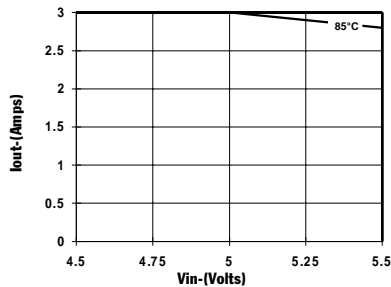
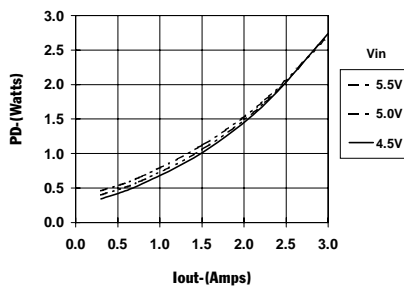
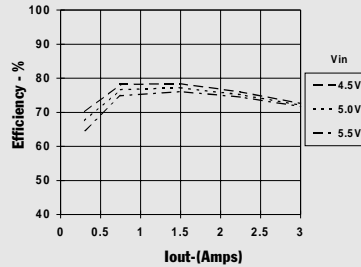
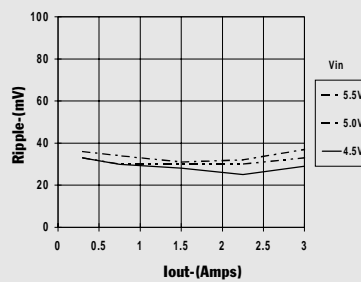
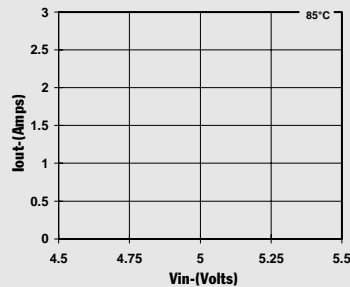
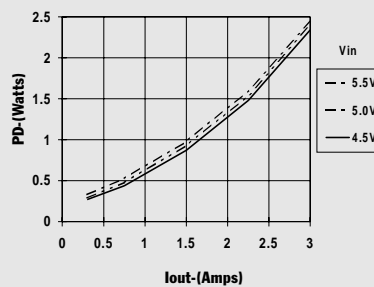
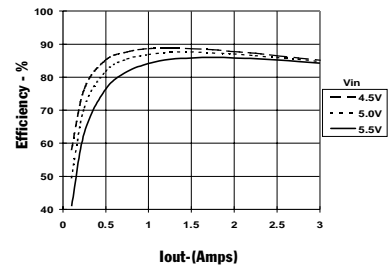
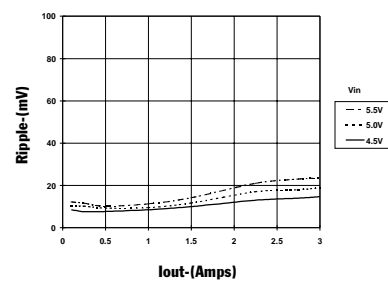
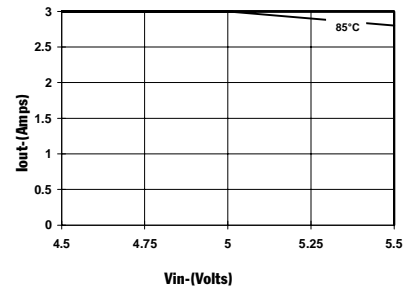
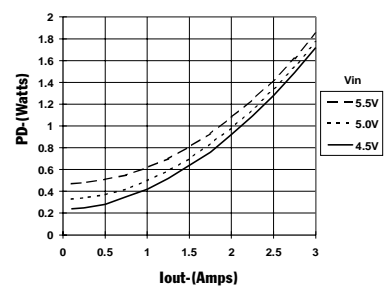
Specifications

| Characteristics ($T_a = 25^\circ\text{C}$ unless noted) | Symbols | Conditions | PT6420 SERIES | | | |
|---|----------------------|---|------------------|----------------------|------------------|---------------------------|
| | | | Min | Typ | Max | Units |
| Output Current | I_o | $4.5\text{V} \leq V_{in} \leq 5.5\text{V}$ | 0 | — | 3.0 | A |
| Current Limit | I_{cl} | $V_{in} = +5\text{V}$ | — | 3.6 | 5.0 | A |
| Input Voltage Range | V_{in} | $0.1\text{A} \leq I_o \leq 3.0\text{A}$ | 4.5 | — | 5.5 | V |
| Output Voltage Tolerance | ΔV_o | $V_{in} = +5\text{V}$, $I_o = 3.0\text{A}$ $0^\circ\text{C} \leq T_a \leq +70^\circ\text{C}$ | $V_o - 0.05$ | 3.3 | $V_o + 0.05$ | V |
| Line Regulation | Reg_{line} | $4.5\text{V} \leq V_{in} \leq 5.5\text{V}$, $I_o = 3.0\text{A}$ | — | ± 10 | ± 25 | mV |
| Load Regulation | Reg_{load} | $V_{in} = +5\text{V}$, $0.3 \leq I_o \leq 3.0\text{A}$ | — | $\pm 10^*$ | $\pm 25^*$ | mV |
| V_o Ripple/Noise | V_n | $V_{in} = 5\text{V}$, $I_o = 3.0\text{A}$ | — | 66 | 165 | mVpp |
| Transient Response with $C_2 = 100\mu\text{F}$ | t_{tr} V_{os} | I_o step between 1.5A and 3.0A V_o over/undershoot | — — | 200 200 | — — | μSec mV |
| Efficiency | η | $V_{in} = +5\text{V}$, $I_o = 1.5\text{A}$ $V_o = 3.3\text{V}$ $V_o = 1.8\text{V}$ $V_o = 2.1\text{V}$ $V_o = 1.2\text{V}$ | — — — — | 85 74 77 63 | — — — — | % % % % |
| Switching Frequency | f_o | $4.5\text{V} \leq V_{in} \leq 5.5\text{V}$ $0.3\text{A} \leq I_o \leq 3.0\text{A}$ | 500 | 650 | 800 | kHz |
| Absolute Maximum Operating Temperature Range | T_a | | 0 | — | +85 | $^\circ\text{C}$ |
| Recommended Operating Temperature Range | T_a | Free Air Convection (40-60 LFM) At $V_{in} = 5\text{V}$, $I_o = 2.5\text{A}$ | 0 | — | +70** | $^\circ\text{C}$ |
| Thermal Resistance | θ_{ja} | Free Air Convection (40-60 LFM) | — | 25 | — | $^\circ\text{C}/\text{W}$ |
| Storage Temperature | T_s | — | -40 | — | +125 | $^\circ\text{C}$ |
| Mechanical Shock | | Per Mil-STD-883D, Method 2002.3, 1 msec, Half Sine, mounted to a fixture | — | 500 | — | G's |
| Mechanical Vibration | | Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board | — | 15 | — | G's |
| Weight | — | — | — | 6.5 | — | grams |

*When used with remote sense function.

**See Thermal Derating chart.

Note: The PT6420 Series requires two 100µF electrolytic or tantalum capacitors for proper operation in all applications.

CHARACTERISTIC DATA**PT6420 Series****PT6428 1.2 VDC** (See Note 1)**Efficiency vs Output Current****Ripple vs Output Current****Thermal Derating (T_a)** (See Note 2)**Power Dissipation vs Output Current****PT6427, 2.1 VDC** (See Note 1)**Efficiency vs Output Current****Ripple vs Output Current****Thermal Derating (T_a)** (See Note 2)**Power Dissipation vs Output Current****PT6425, 3.3 VDC** (See Note 1)**Efficiency vs Output Current****Ripple vs Output Current****Thermal Derating (T_a)** (See Note 2)**Power Dissipation vs Output Current****Note 1:** All data listed in the above graphs except for derating data has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note 2:** Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

[More Application Notes](#)**Adjusting the Output Voltage of the PT6420 Series 3AMP 5V Bus Converters**

The output voltage of the Power Trends PT6420 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as V_a (min) and V_a (max).

Adjust Up: (See note 1)

An increase in the output voltage is obtained by adding a resistor R1, between pin 14 (V_o adjust) and pins 11-13 (V_{out}).

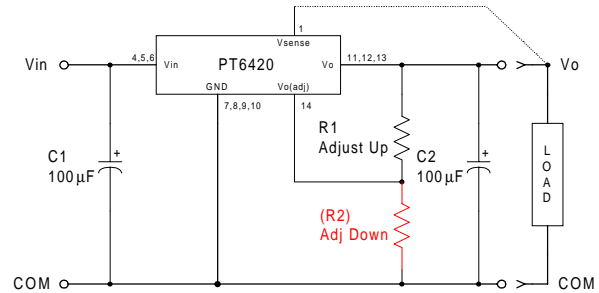
Adjust Down: (See note 1)

Add a resistor (R2), between pin 14 (V_o adjust) and pins 7-10 (GND).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor; either R1 or (R2) as appropriate.

Notes:

1. The direction in which each resistor adjusts the output of the PT6420 series differs from many other Power Trends products. These output voltage adjustment notes are therefore specific only to the PT6420 models.
2. Use only a single 1% resistor in either the R1 or (R2) location. Place the resistor as close to the ISR as possible.
3. Never connect capacitors from V_o adjust to either GND, V_{out} , or the Remote Sense pin. Any capacitance added to the V_o adjust pin will affect the stability of the ISR.
4. The PT6420 incorporates a Remote Sense (See Figure 1). If this feature is being used, connecting the resistor R1 between pin 14 (V_o adjust) and pin 1 (Remote Sense) can benefit load regulation.
5. An increase in the output voltage may place additional limits on the input voltage range of the part. The revised minimum input voltage will be ($V_{out} + 1.2$) or 4.5V, whichever is higher. Do not exceed 5.5Vdc.

Figure 1

The values of R1 [adjust up], and (R2) [adjust down], can also be calculated using the following formulae.

$$R1 = \frac{12.45 V_o}{(V_a - V_o)} - 49.9 \quad \text{k}\Omega$$

$$(R2) = \frac{12.45 (2V_a - V_o)}{V_o - V_a} - 49.9 \quad \text{k}\Omega$$

Where: V_o = Original output voltage
 V_a = Adjusted output voltage

Table 1**PT6420 ADJUSTMENT RANGE**

| Series Pt # | PT6428 | PT6424 | PT6426 | PT6427 | PT6429 | PT6425 |
|-------------|--------|--------|--------|--------|--------|--------|
| V_o (nom) | 1.2 | 1.5 | 1.8 | 2.1 | 2.5 | 3.3 |
| V_a (min) | 1.1 | 1.3 | 1.5 | 1.8 | 2.1 | 2.8 |
| V_a (max) | 1.4 | 1.8 | 2.2 | 2.6 | 3.1 | 3.8 |

PT6420 Series**Application****Notes****Table 2****PT6420 ADJUSTMENT RESISTOR VALUES**

| Series Pt # | PT6428 | PT6424 | PT6426 | PT6427 | PT6429 | PT6425 |
|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| V _o (nom) | 1.2 | 1.5 | 1.8 | 2.1 | 2.5 | 3.3 |
| V _a (req'd) | | | | | | |
| 1.1 | (74.6)kΩ | | | | | |
| 1.15 | (224.0)kΩ | | | | | |
| 1.2 | | | | | | |
| 1.25 | 249.0kΩ | | | | | |
| 1.3 | 99.5kΩ | (18.6)kΩ | | | | |
| 1.35 | 49.7kΩ | (49.7)kΩ | | | | |
| 1.4 | 24.8kΩ | (112.0)kΩ | | | | |
| 1.45 | | (299.0)kΩ | | | | |
| 1.5 | | | (0.0)kΩ | | | |
| 1.55 | | 324.0kΩ | (14.8)kΩ | | | |
| 1.6 | | 137.0kΩ | (37.3)kΩ | | | |
| 1.65 | | 74.6kΩ | (74.6)kΩ | | | |
| 1.7 | | 43.5kΩ | (149.0)kΩ | | | |
| 1.75 | | 24.8kΩ | (373.0)kΩ | | | |
| 1.8 | | 12.4kΩ | | (12.4)kΩ | | |
| 1.85 | | | 398.0kΩ | (29.8)kΩ | | |
| 1.9 | | | 174.0kΩ | (55.9)kΩ | | |
| 1.95 | | | 99.5kΩ | (99.5)kΩ | | |
| 2.0 | | | 62.2kΩ | (187.0)kΩ | | |
| 2.05 | | | 39.7kΩ | (448.0)kΩ | | |
| 2.1 | | | 24.8kΩ | | (3.0)kΩ | |
| 2.15 | | | 14.1kΩ | 473.0kΩ | (14.1)kΩ | |
| 2.2 | | | 6.1kΩ | 212.0kΩ | (29.0)kΩ | |
| 2.25 | | | | 124.0kΩ | (49.7)kΩ | |
| 2.3 | | | | 80.8kΩ | (80.8)kΩ | |
| 2.35 | | | | 54.7kΩ | (133.0)kΩ | |
| 2.4 | | | | 37.3kΩ | (236.0)kΩ | |
| 2.45 | | | | 24.8kΩ | (548.0)kΩ | |
| 2.5 | | | | 15.5kΩ | | |
| 2.55 | | | | 8.2kΩ | 573.0kΩ | |
| 2.6 | | | | 2.4kΩ | 261.0kΩ | |
| 2.65 | | | | | 158.0kΩ | |
| 2.7 | | | | | 106.0kΩ | |
| 2.75 | | | | | 74.6kΩ | |
| 2.8 | | | | | 53.9kΩ | (7.4)kΩ |
| 2.85 | | | | | 39.0kΩ | (16.5)kΩ |
| 2.9 | | | | | 27.9kΩ | (27.9)kΩ |
| 2.95 | | | | | 19.3kΩ | (42.6)kΩ |
| 3.0 | | | | | 12.4kΩ | (62.2)kΩ |
| 3.1 | | | | | 2.0kΩ | (131.0)kΩ |
| 3.2 | | | | | | (336.0)kΩ |
| 3.3 | | | | | | |
| 3.4 | | | | | | 361.0kΩ |
| 3.5 | | | | | | 156.0kΩ |
| 3.6 | | | | | | 87.0kΩ |
| 3.7 | | | | | | 52.8kΩ |
| 3.8 | | | | | | 32.3kΩ |

R1 = Black R2 = (Red)

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.