



DC FILTERS]

General Purpose High Performance

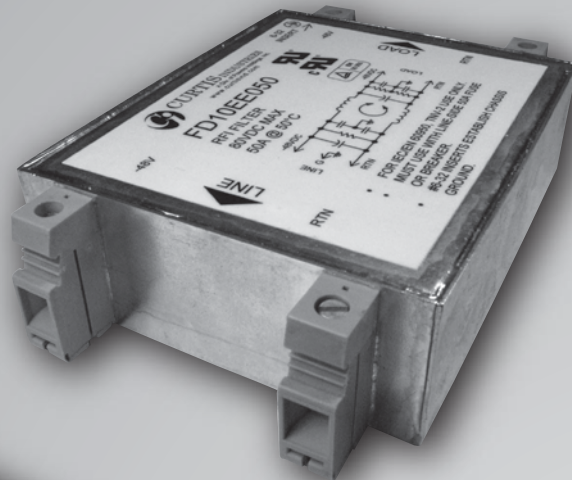

Curtis Industries
A Division of Powers Holdings, Inc.

FD Series Filters

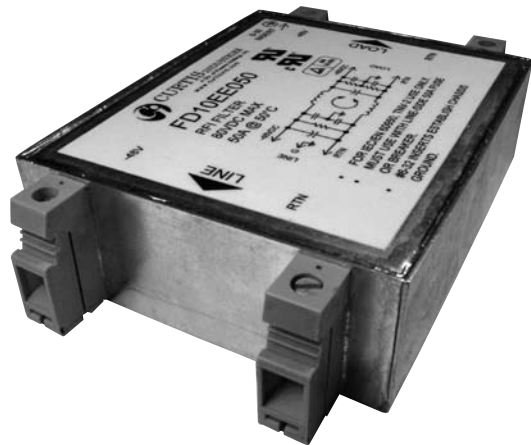

The FD Series of DC filters are designed as a general purpose line of filters for DC applications. They are designed to comply with UL/EN 60950 and UL 1459, CISPER 22 and Telecordia (Bellcore) GR-1089 at 25Amps and above. These filters are available with and without circuit breakers for additional protection.

The FD Series is a compact size that can filter up to 300MHz ideally suited for the telecom-datacom market. The FD0 Series is available from 6Amps to 100Amps in the smallest, economical package. The FD02 is a high frequency filter up to 3GHz (3,000MHz) in a compact package.

These filters are ideally used in communications and central office equipment.

- Power Supplies for Communications Equipment
- Network Routing Equipment
- Switching Equipment
- Base Stations
- Modems
- Services
- Ethernet Hubs



Specifications:

Rated Voltage: 80VDC Maximum

Rated Current: 6A
10A
20A
25A
50A
75A
100A

Current Overload: 6X for 8 seconds

Hi-Pot Rating (1 min):

Line to Ground 1060VDC
Line to Line 100VDC

Insulation Resistance: 1000 MΩ at 80VDC

Ambient Temperature: 0°C to 55°C (32°F to 131°F)

Humidity Range: 0% to 95% R.H.

Termination: See Chart at Right

Wire Leads: 18AWG 6A to 20A (FD0)
(FD0 25Amp to 100Amp not available with wire leads)
10AWG 30Amp (FD1, FD2, FD3)
6AWG 50Amp
4AWG 75Amp & 100Amp

Agency Approvals:

6Amp to 20Amp



25Amp to 100Amp



General Purpose

DC FILTERS



Power Line Filter Selection Guide

FD00 & FD02 SERIES

FILTER Part Number	Current Rating (Amps)	Termination		
		Quick Connects	Wire Leads	Studs
FD00AA006	6	X		
FD00BB006	6		X	
FD00DD006	6			X
FD00AA010	10	X		
FD00BB010	10		X	
FD00DD010	10			X
FD00AA020	20	X		
FD00DD020	20			X
FD00BD025	25		X	X
FD00DD025	25			X
FD00BD050	50		X	X
FD00DD050	50			X
FD00BD075	75		X	X
FD00DD075	75			X
FD00BD100	100		X	X
FD00DD100	100			X
FD02BD025	25		X	X
FD02DD025	25			X
FD02DD050	50			X
FD02BD050	50		X	X
FD02DD075	75			X
FD02BD075	75		X	X
FD02DD100	100			X
FD02BD100	100		X	X

FD1, FD2, FD3 SERIES

FILTER Part Number	Current Rating (Amps)	Disconnect Type			Termination			
		Single Pole Rocker Breaker	Double Pole Rocker Breaker	Double Pole Handle Breaker	Wire Leads	High Current Connector	Euro Connector	Dual Stud T-Block
FD10BB030	30				X			
FD10EE030	30						X	
FD10BB050	50				X			
FD10EE050	50						X	
FD10BB075	75				X			
FD10BB100	100				X			
FD20B_ _ _	30, 50, or 80				X			
FD20E_ _ _							X	
FD20R_ _ _		X						X
FD20D_ _ _			X					X
FD20H_ _ _				X				X
FD20_B_ _ _					X			
FD20_C_ _ _						X		
FD20_E_ _ _							X	
FD20_T_ _ _								X
FD30B_ _ _	30, 50, 75, or 100				X			
FD30E_ _ _							X	
FD30R_ _ _		X						X
FD30D_ _ _			X					X
FD30H_ _ _				X				X
FD30_B_ _ _					X			
FD30_C_ _ _						X		
FD30_E_ _ _							X	
FD30_T_ _ _								X


General Purpose

DC FILTERS



FD Series Filters

How to Order

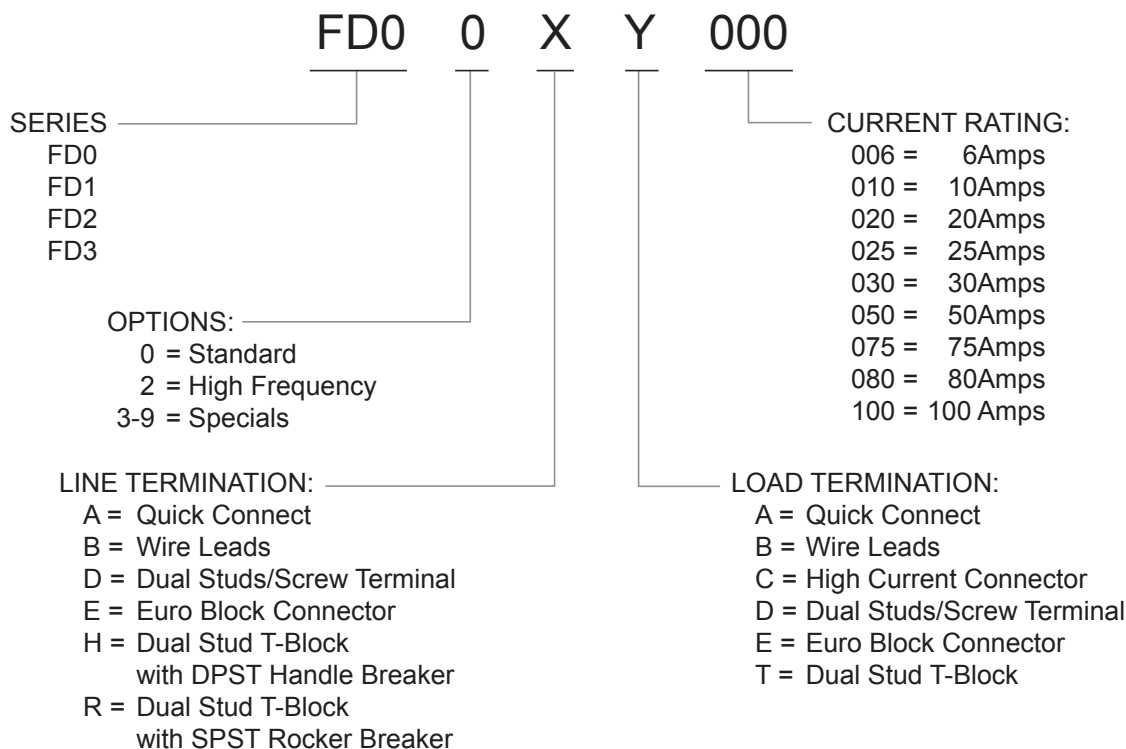

NOTE: Not all terminations are available in all models.

Part Number	MODE	TYPICAL INSERTION LOSS - dB (50 ohm Circuit)												
		Frequency - MHz												
		.01	.03	.10	.15	.50	1.0	5.0	10	30	100	300	1000	3000
FD00XX006	Common Differential	—	—	—	10	22	30	42	47	40	—	—	—	—
FD00XX010		—	—	—	15	45	60	60	50	50	—	—	—	—
FD00XX020		—	—	—	—	—	—	—	—	—	—	—	—	—
FD00XX025	Common Differential	—	—	—	22	50	60	50	45	40	—	—	—	—
FD00XX050		—	—	—	32	38	50	55	50	40	—	—	—	—
FD00XX075		—	—	—	—	—	—	—	—	—	—	—	—	—
FD00XX100														
FD02XX025	Common Differential	5	5	35	45	60	60	55	55	50	40	10	20	25
FD02XX050		40	45	45	45	48	50	45	55	48	45	15	58	40
FD02XX100														
FD10XX030	Common Differential	5	15	48	60	65	65	60	60	55	25	25	—	—
FD10XX050		55	60	70	70	70	65	70	60	50	35	15	—	—
FD10XX075														
FD10XX100														
FD20XX030	Common Differential	5	15	48	60	70	70	70	60	55	—	—	—	—
FD20XX050		55	65	70	65	60	65	55	50	45	—	—	—	—
FD20XX080														
FD30XX030	Common Differential	12	20	44	60	60	60	60	60	55	—	—	—	—
FD30XX050		50	60	70	70	70	70	55	70	60	—	—	—	—
FD30XX075														
FD30XX100														



General Purpose

DC FILTERS



FD00 Filters

FD00AA (6, 10 and 20Amp) Dimensions

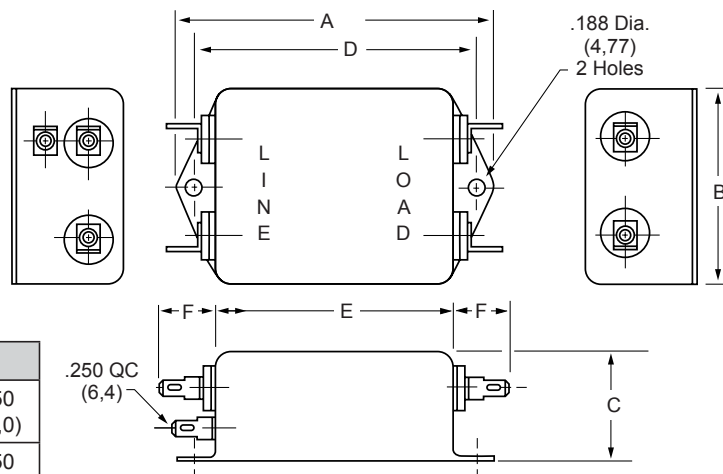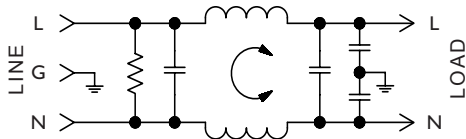


Amps	A	B	C	D	E	F
6A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	2.500 (63,5)	.550 (14,0)
10A	3.312 (84,1)	2.000 (50,8)	1.500 (38,2)	2.940 (74,7)	2.500 (63,5)	.550 (14,0)
20A	See FD00DD below for Case Dimensions					


FD00BB

(6 and 10Amp) Dimensions

Amps	A	B	C	D	E
6A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	2.500 (50,8)
10A	3.312 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,70)	2.500 (50,8)

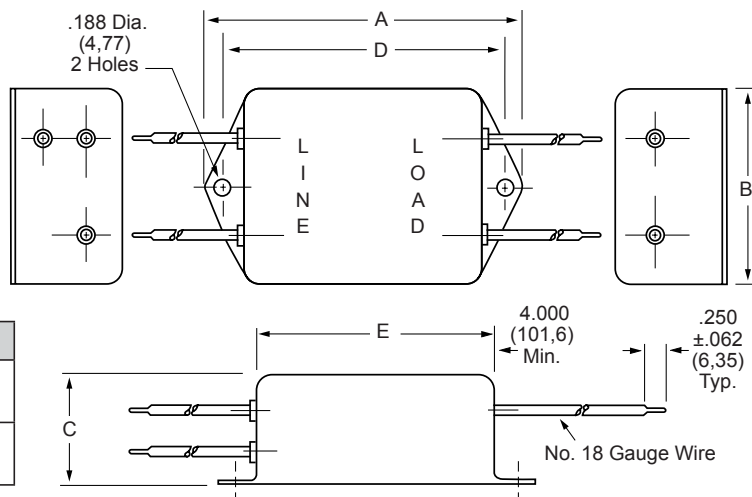

FD00DD (20Amp) Dimensions

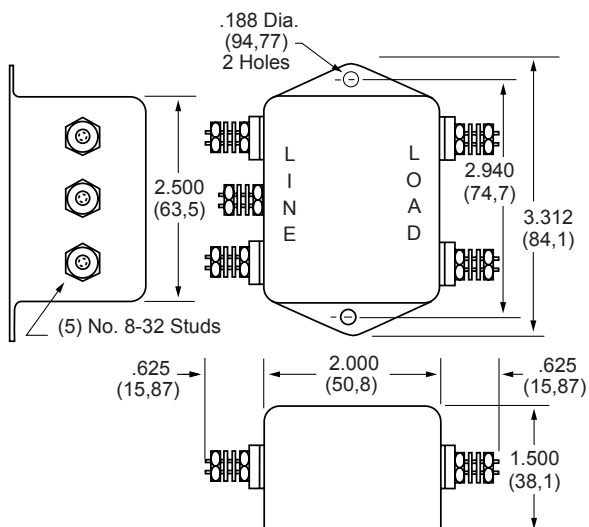

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.



Curtis Industries
A Division of Powers Holdings, Inc.

1-800-657-0853





71

General Purpose





DC FILTERS

FD00 & FD02 Filters

FD00DD (25, 50, 75 and 100Amp) Dimensions

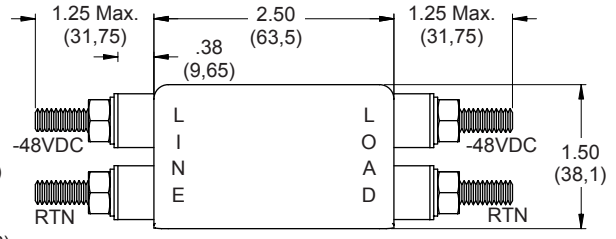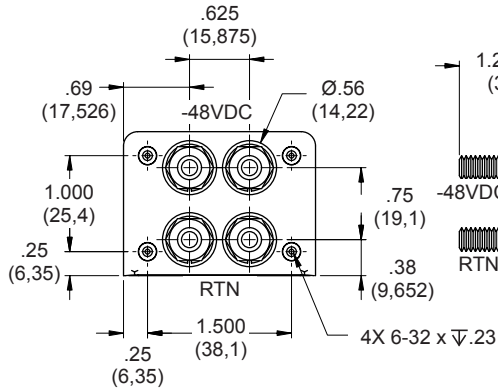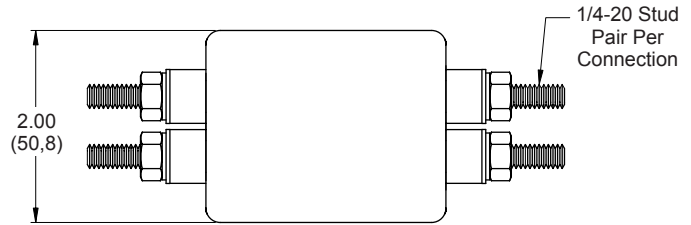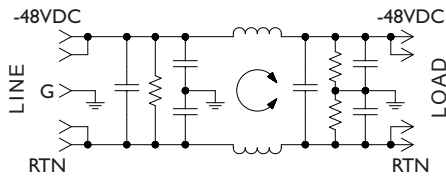


FD02DD (25, 50 and 100Amp) Dimensions

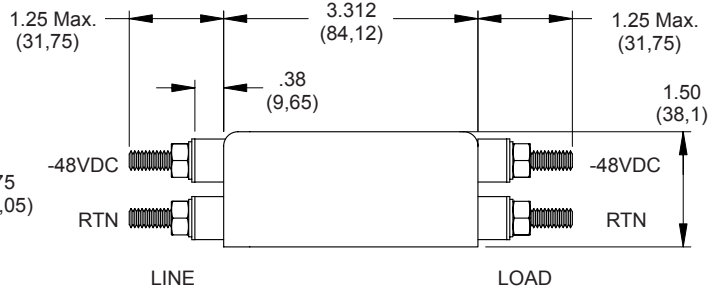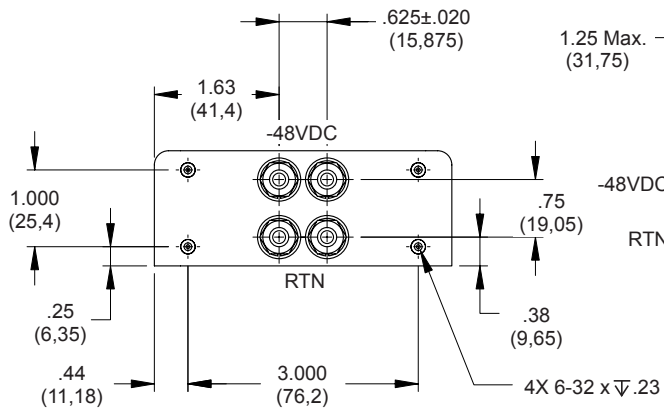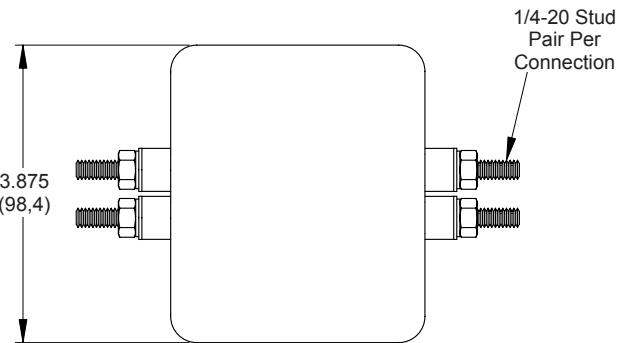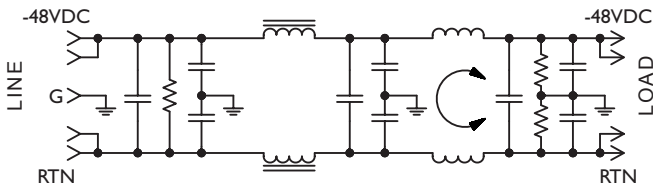

FD1 Filters

FD10EE050


(50Amp) Dimensions

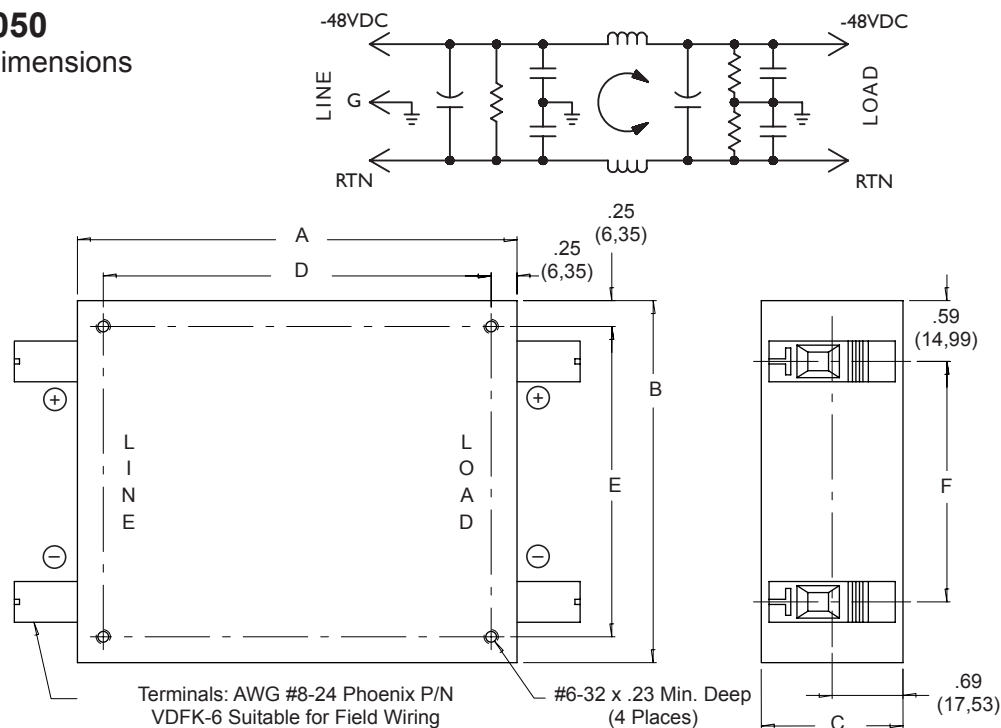

Amps	A	B	C	D	E	F
50A	4.25 (107,95)	3.50 (88,9)	1.37 (34,79)	3.750 (95,25)	3.000 (76,2)	2.33 (59,18)
100A	4.25 (107,95)	3.50 (88,9)	1.37 (34,79)	3.750 (95,25)	3.000 (76,2)	2.33 (59,18)

FD10BB100

(100Amp) Dimensions

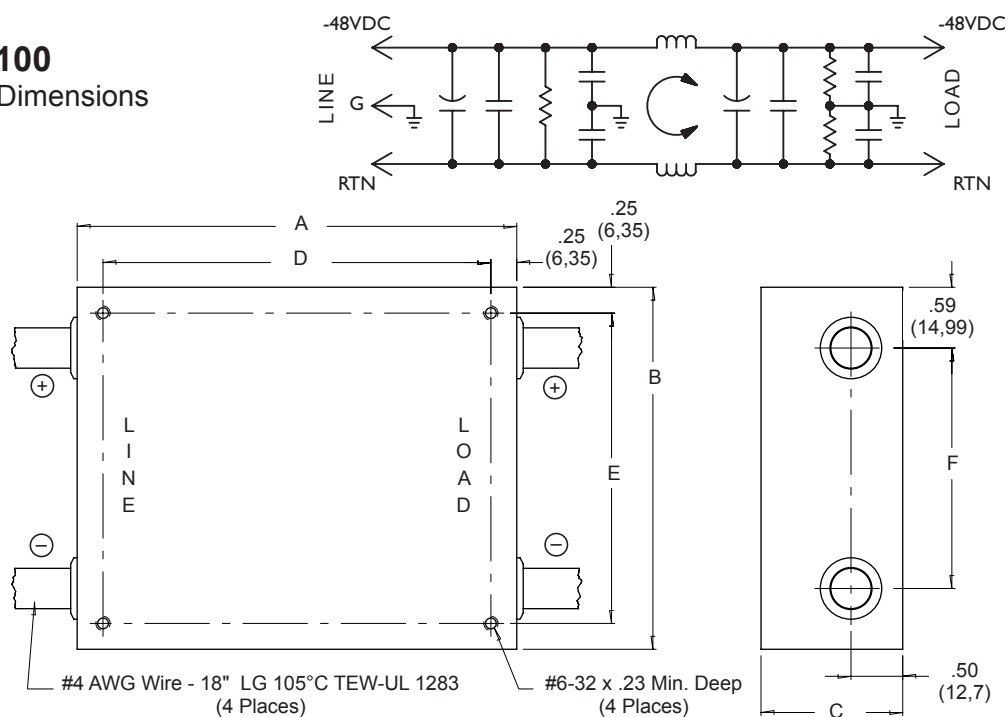

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.



Curtis Industries
A Division of Powers Holdings, Inc.

1-800-657-0853

73


High Performance

DC FILTERS

FD2 & FD3 Filters


FD20HC080

(30, 50 and 80Amp) Dimensions

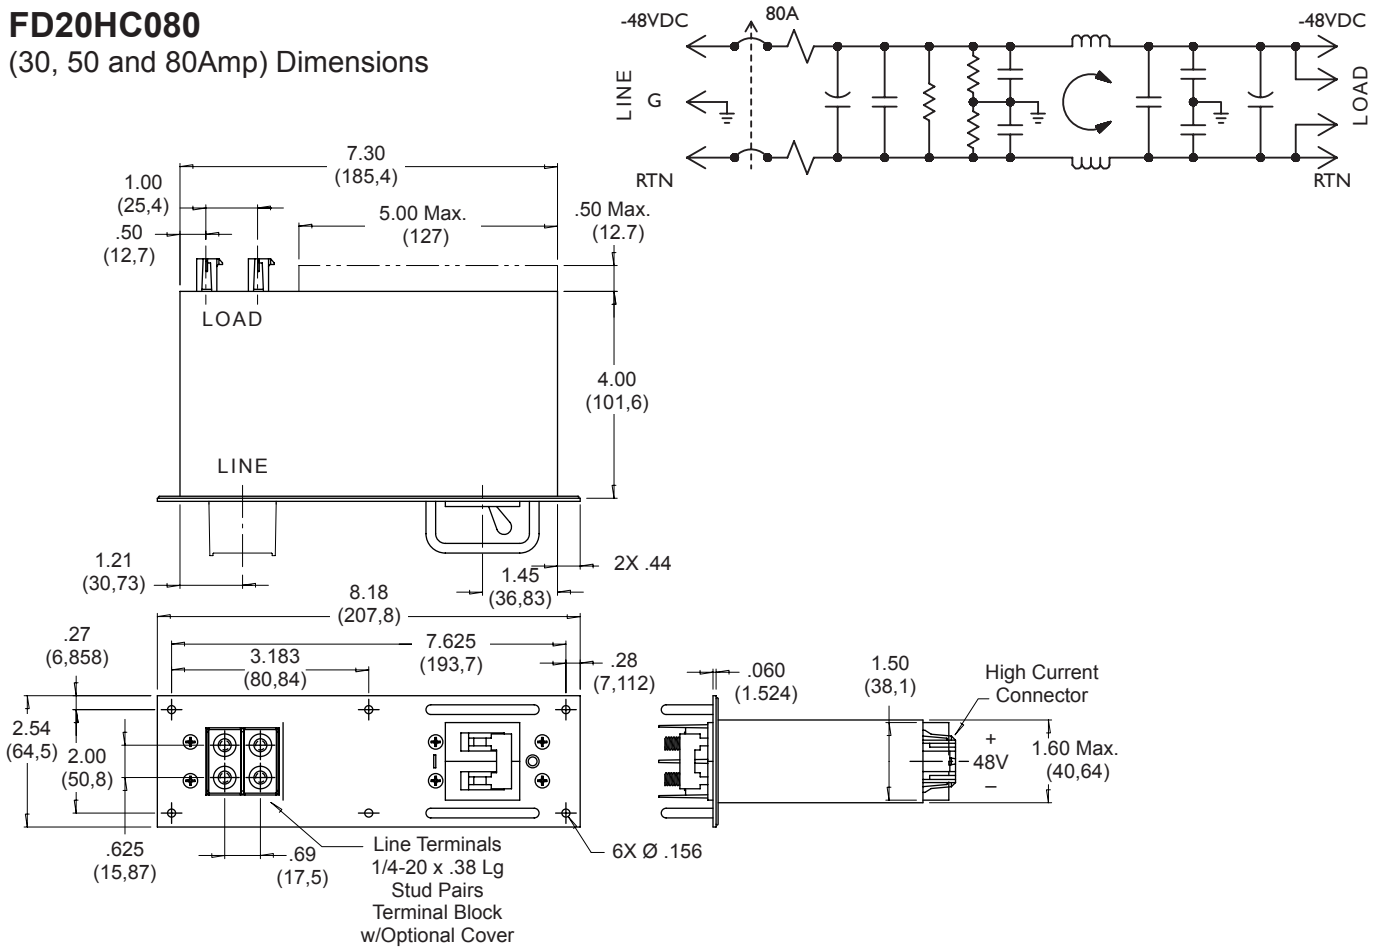

FD30RB100

(30, 50, 75 and 100Amp) Dimensions

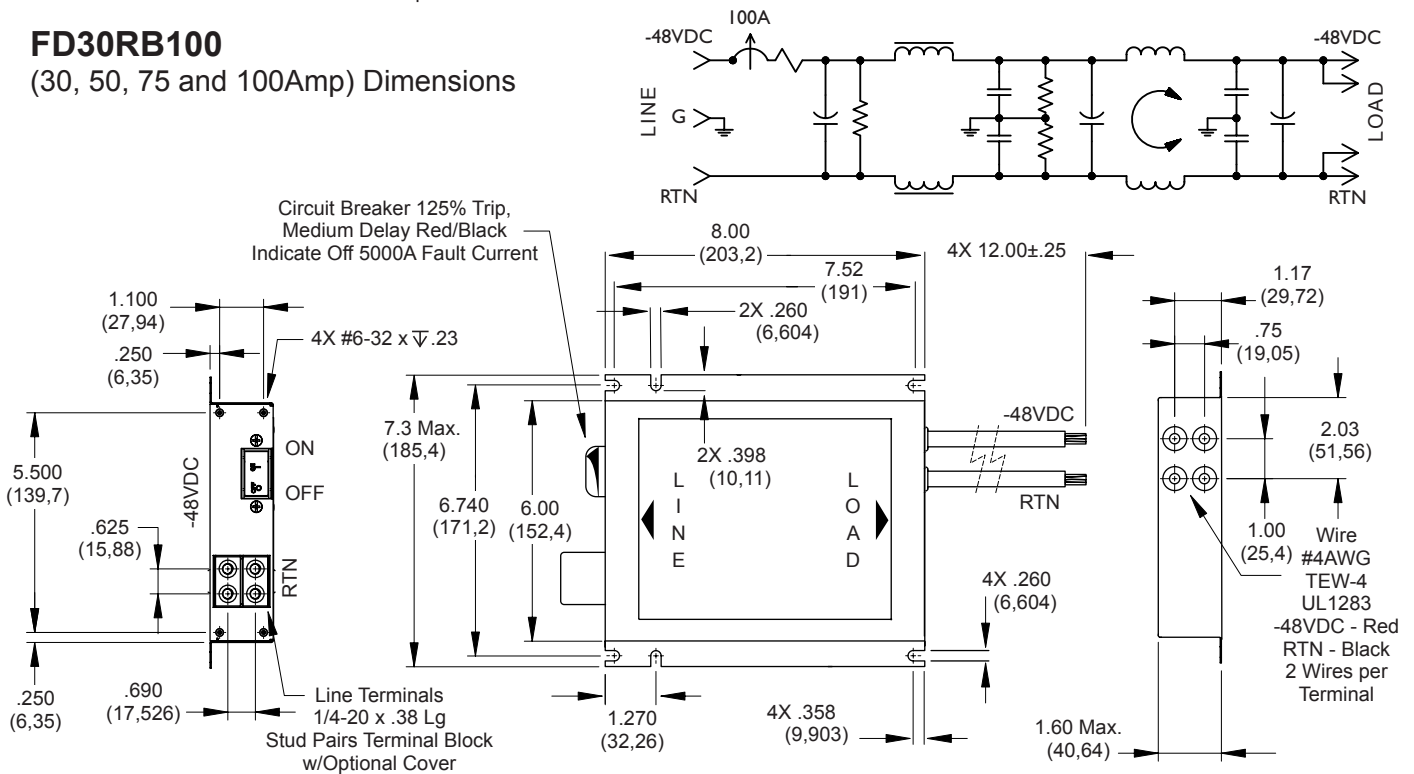

High Performance

DC FILTERS

