



SAW Components

Data Sheet B4218

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured, with some light streaks and a sense of motion or depth.

EPCOS



SAW Components

B4218

Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz


Data Sheet



Ceramic package QCC8D

Features

- Low-loss 2-in-1 RF filter for mobile telephone PCS systems, transmit path
- Device with two integrated Tx-filter
- Usable passband of Tx-filter 1 30 MHz
- Usable passband of Tx-filter 2 30 MHz
- No matching network required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)

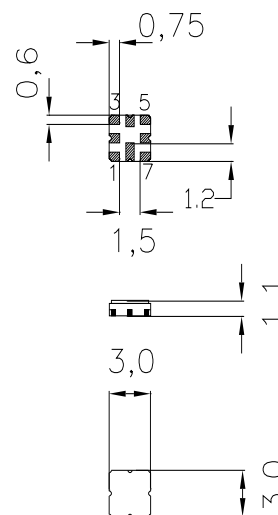


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,037 g

Pin configuration

1	Input Tx-filter 1
7	Output Tx-filter 1
2,6	To be grounded
3	Input Tx-filter 2
5	Output Tx-filter 2
4,8	Case-ground, to be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4218	B39192-B4218-U810	C61157-A7-A72	F61074-V8101-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 /+ 85	$^{\circ}\text{C}$	source and load impedance 50 Ω continuous wave
Storage temperature range	T_{stg}	- 40 /+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
Input power max. 1850...1910 MHz	P_{IN}	10	dBm	



SAW Components

B4218

Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz

Data Sheet



Characteristics of Tx-filter 1

Operating temperature range: $T = -30$ to $+85$ °C

Terminating source impedance: $Z_S = 50 \Omega$

Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1865,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1850,0 ... 1880,0	MHz	—	1,8	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1850,0 ... 1880,0	MHz	—	0,7	1,4	dB
Input return loss						
	1850,0 ... 1880,0	MHz	9,0	10,0	—	dB
Output return loss						
	1850,0 ... 1880,0	MHz	9,0	10,0	—	dB
Attenuation	α					
	10,0 ... 1570,0	MHz	25,0	29,0	—	dB
	1570,0 ... 1580,0	MHz	30,0	32,0	—	dB
	1580,0 ... 1780,0	MHz	29,0	32,0	—	dB
	1780,0 ... 1800,0	MHz	25,0	30,0	—	dB
	1800,0 ... 1805,0	MHz	20,0	26,0	—	dB
	1930,0 ... 1960,0	MHz	38,0	45,0	—	dB
	1960,0 ... 2400,0	MHz	32,0	35,0	—	dB
	2400,0 ... 3000,0	MHz	22,0	32,0	—	dB
	3000,0 ... 4000,0	MHz	15,0	19,0	—	dB
	5550,0 ... 5640,0	MHz	0,0	5,0	—	dB
Rx band suppression	α					
	1930,0 ... 1960,0	MHz	38,0	45,0	—	dB
LO suppression	α					
	2113,0 ... 2174,0	MHz	32,0	35,0	—	dB



SAW Components

B4218

Low-Loss Filter for Mobile Communication

1865,0 & 1895,0 MHz

Data Sheet




Characteristics of Tx-filter 2


Operating temperature range: $T = -30$ to $+85$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1895,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1880,0 ...1910,0 MHz		—	1,8	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1880,0 ...1910,0 MHz		—	0,7	1,4	dB
Input return loss						
	1880,0 ...1910,0 MHz		9,0	10,0	—	dB
Output return loss						
	1880,0 ...1910,0 MHz		9,0	10,0	—	dB
Attenuation	α					
	10,0 ...1570,0 MHz		25,0	29,0	—	dB
	1570,0 ...1580,0 MHz		30,0	32,0	—	dB
	1580,0 ...1780,0 MHz		29,0	32,0	—	dB
	1780,0 ...1800,0 MHz		25,0	30,0	—	dB
	1800,0 ...1830,0 MHz		22,0	29,0	—	dB
	1960,0 ...1990,0 MHz		38,0	45,0	—	dB
	1990,0 ...2400,0 MHz		32,0	35,0	—	dB
	2400,0 ...3000,0 MHz		22,0	30,0	—	dB
	3000,0 ...4000,0 MHz		15,0	19,0	—	dB
	5640,0 ...5730,0 MHz		0,0	5,0	—	dB
Rx band suppression	α					
	1960,0 ...1990,0 MHz		38,0	45,0	—	dB
LO suppression	α					
	2113,0 ...2174,0 MHz		32,0	35,0	—	dB


Transfer function Tx-filter 1

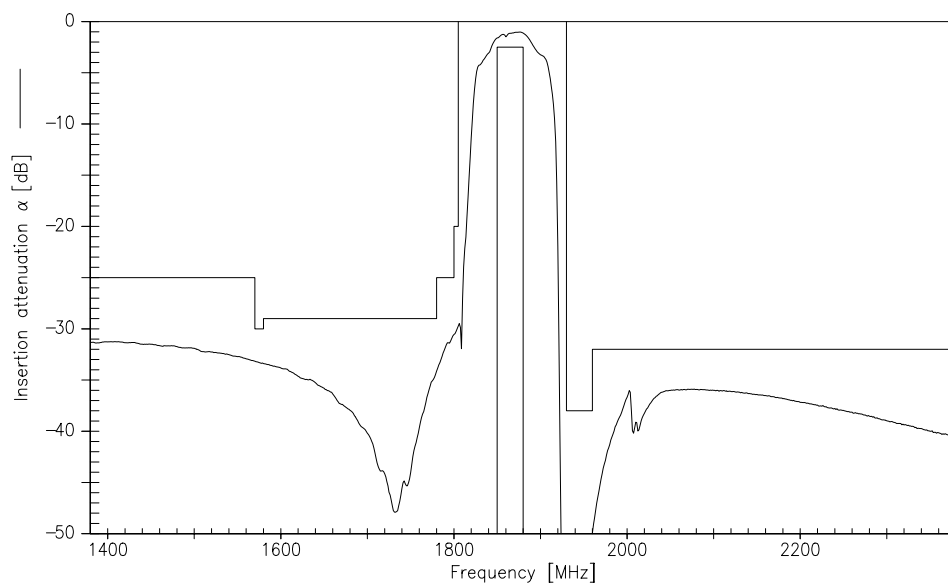


Transfer function Tx-filter 1(wideband)

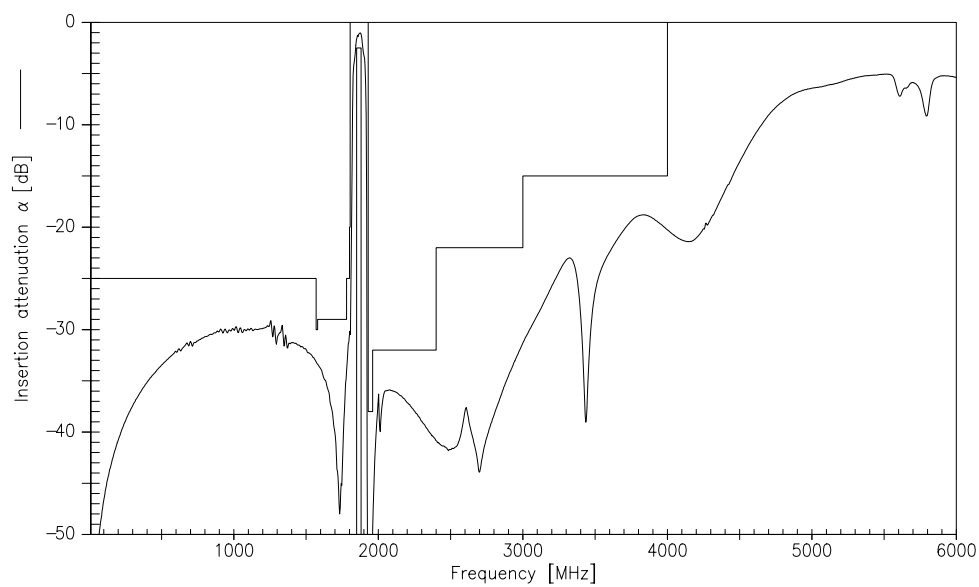



Transfer function Tx-filter 2

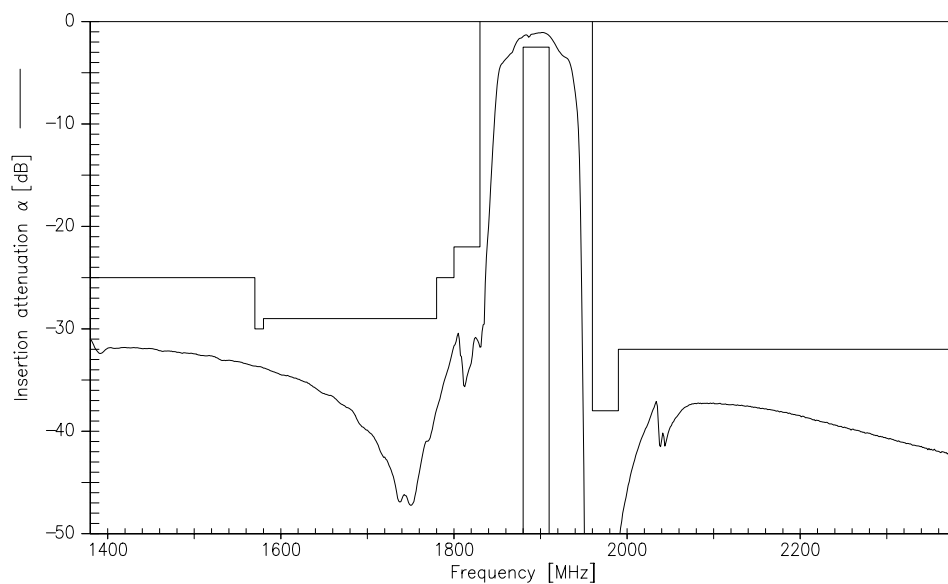



Transfer function Tx-filter 2(wideband)

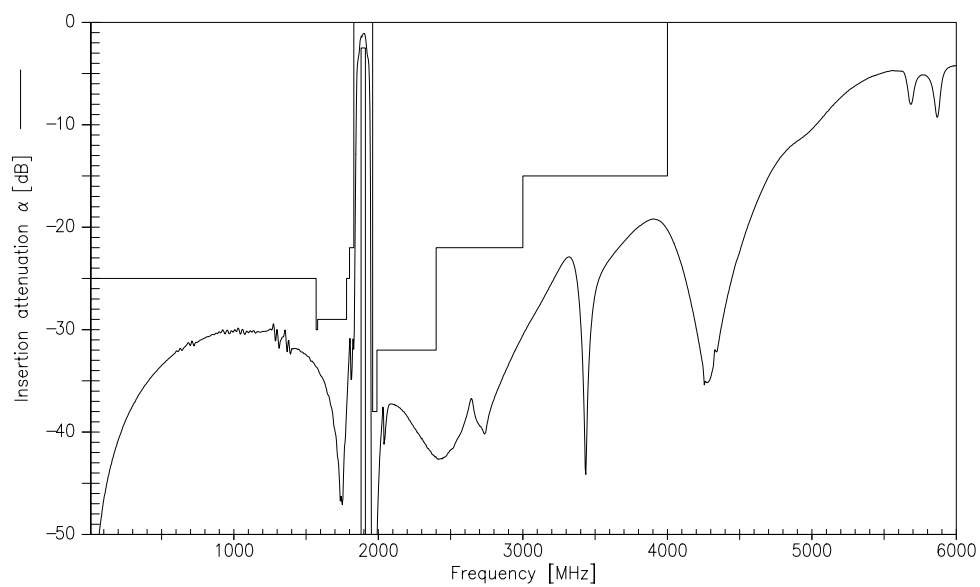

Reflection functions of Tx-filter 1

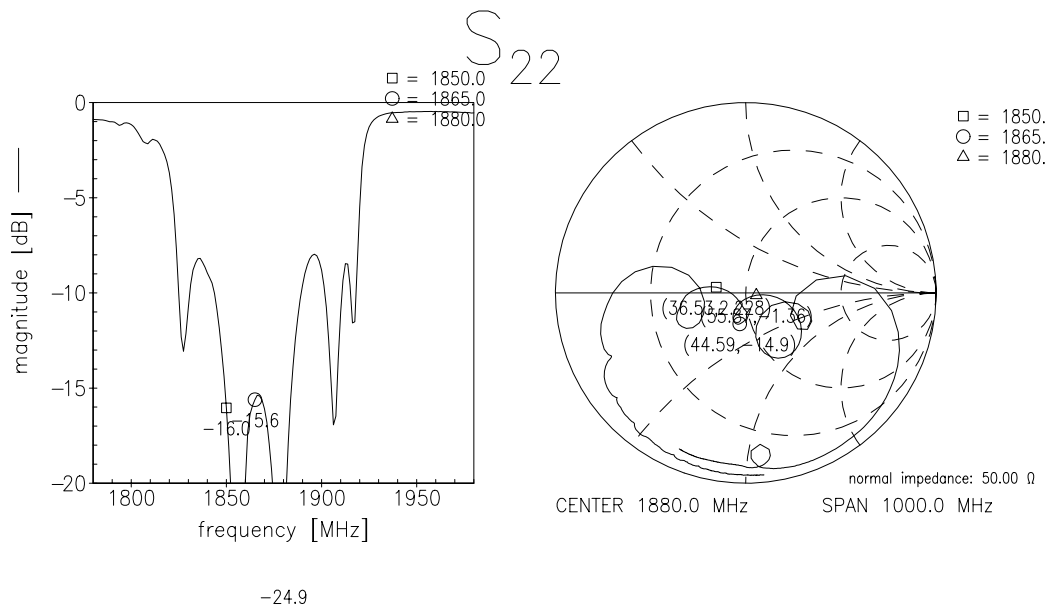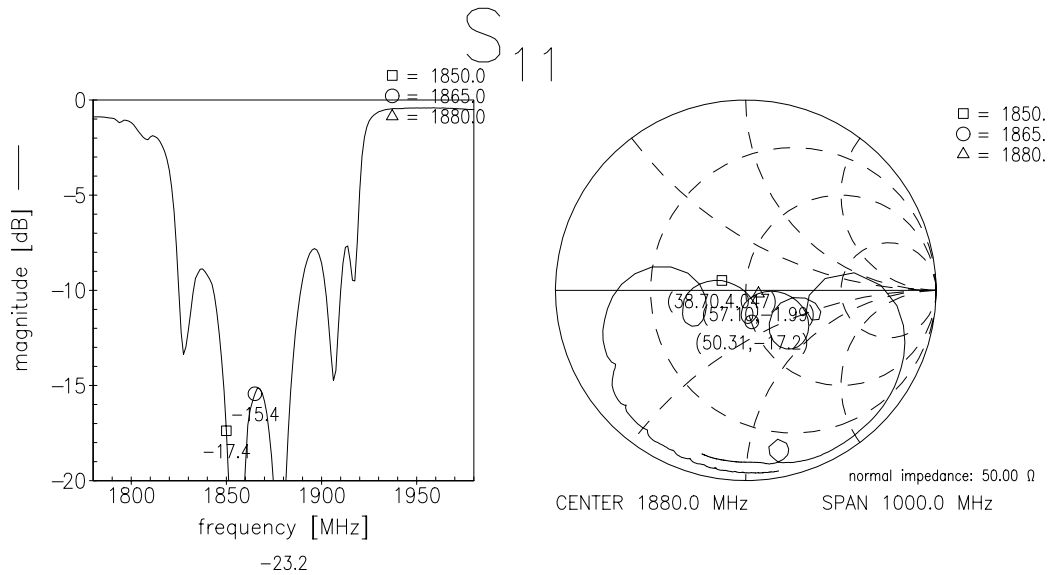

Reflection functions of Tx-filter 2

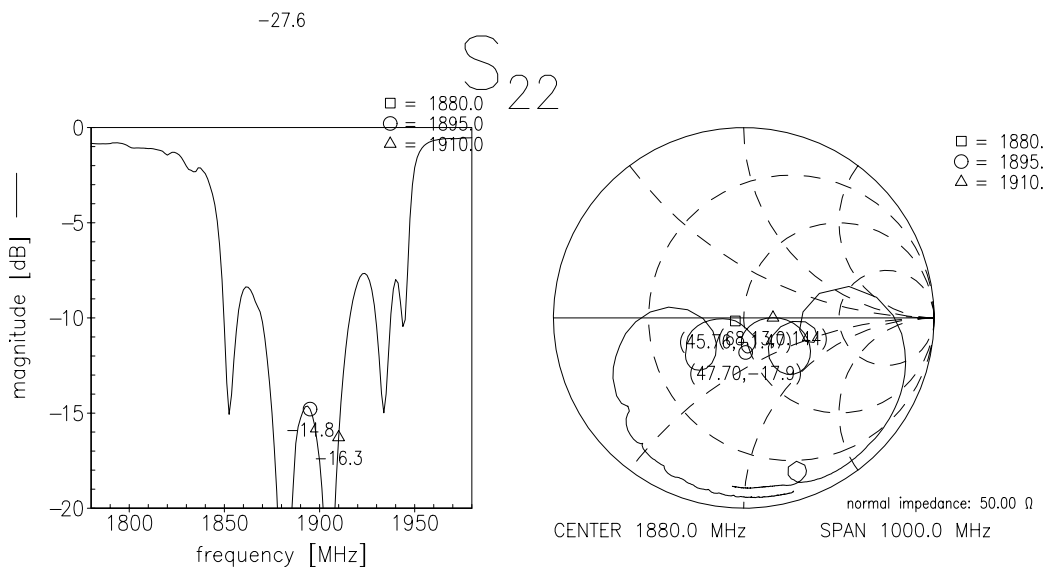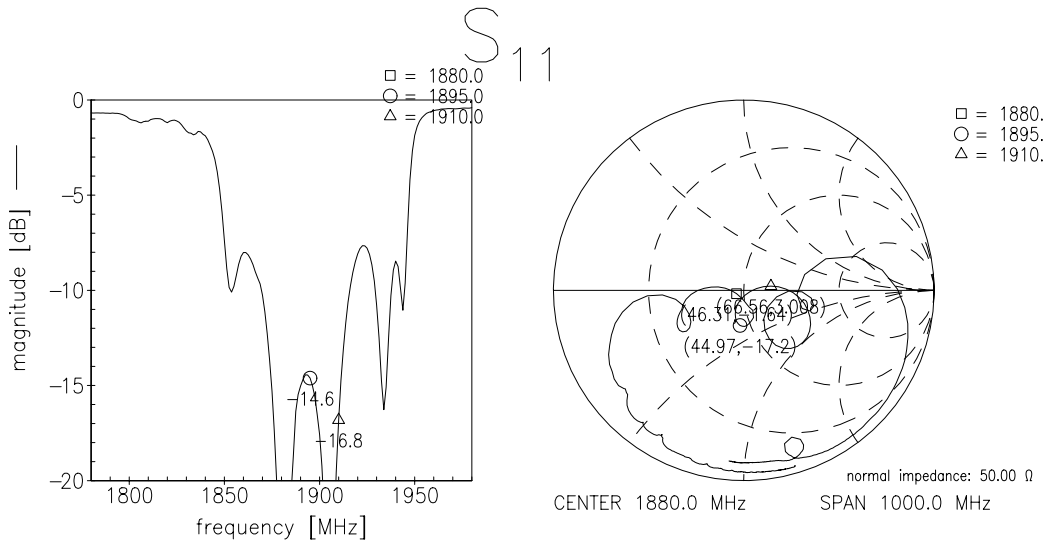



SAW Components	B4218
Low-Loss Filter for Mobile Communication	1865,0 & 1895,0 MHz
Data Sheet	

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.