



SAW Components

Data Sheet B7711, Pb-Free

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a bright, circular highlight in the center of each, giving them a three-dimensional appearance. They are set against a dark, textured background that includes a faint, stylized globe and circuitry patterns, suggesting a global and technological context.



SAW Components

B7711

Low-Loss Filter for Mobile Communication

1950,0 MHz


Data Sheet



Chip Sized SAW Package QCS5H

Features

- Low-loss RF filter for W-CDMA mobile telephone system, transmit path
- Low amplitude ripple
- Usable passband 60 MHz
- Balanced to unbalanced operation
- Impedance transformation from 200Ω to 50Ω
- Pb-Free
- Package for Surface Mounted Technology (SMT)

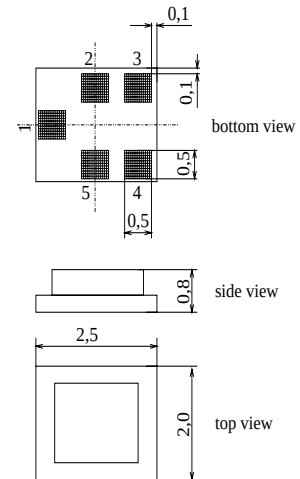


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,015 g

Pin configuration

- | | |
|------|--------------------|
| 1 | Output, unbalanced |
| 2, 5 | Output ground |
| 3, 4 | Input, balanced |
| 2, 5 | To be grounded |

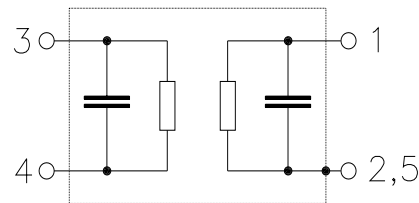

Type	Ordering code	Marking and Package according to	Packing according to
B7711	B39202-B7711-K910	C61157-A7-A139	F61074-V8189-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 20 /+ 85	°C	
Storage temperature range	T_{stg}	- 40 /+ 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V^*_{ESD}	50*	V	
Source power	P_S	10	dBm	

*-acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulse



SAW Components

B7711

Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +25\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 200\text{ }\Omega$ (balanced) $\parallel$ 22 nH
Terminating load impedance: $Z_L = 50\text{ }\Omega$ $\parallel$ 6,8 nH

		min.	typ.	max.	
Center frequency	f_C	—	1950,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,3	2,7	dB
1920,0 ... 1980,0 MHz		—	2,3	2,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,4	0,7	dB
1920,0 ... 1980,0 MHz		—	0,4	0,7	dB
Amplitude ripple per 5MHz channel (p-p)	$\Delta\alpha_{5\text{MHz}}$	—	0,2	0,3	dB
1920,0 ... 1980,0 MHz		—	0,2	0,3	dB
Input VSWR		—	1,8	2,0	
1920,0 ... 1980,0 MHz		—	1,8	2,0	
Output VSWR		—	1,8	2,0	
1920,0 ... 1980,0 MHz		—	1,8	2,0	
Input amplitude balance (S_{31} / S_{21})		-1,0	0	1,4	dB
1920,0 ... 1980,0 MHz		-1,0	0	1,4	dB
Input phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	0	10	$^{\circ}$
1920,0 ... 1980,0 MHz		-10	0	10	$^{\circ}$
Attenuation	α				
50,0 ... 1350,0 MHz		40	45	—	dB
1350,0 ... 1800,0 MHz		29	31	—	dB
1800,0 ... 1880,0 MHz		20	22	—	dB
2110,0 ... 2170,0 MHz		23	25	—	dB
2170,0 ... 2300,0 MHz		30	34	—	dB
2300,0 ... 3200,0 MHz		35	40	—	dB
3200,0 ... 5000,0 MHz		45	55	—	dB
5000,0 ... 6000,0 MHz		40	45	—	dB



SAW Components

B7711

Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20$ to $+85$ °C
Terminating source impedance: $Z_S = 200 \Omega$ (balanced) $\parallel 22$ nH
Terminating load impedance: $Z_L = 50 \Omega \parallel 6,8$ nH

		min.	typ.	max.	
Center frequency	f_C	—	1950,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	2,6	3,0	dB
1920,0 ... 1980,0 MHz		—	2,6	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,4	1,0	dB
1920,0 ... 1980,0 MHz		—	0,4	1,0	dB
Amplitude ripple per 5MHz channel (p-p)	$\Delta\alpha_{5\text{MHz}}$	—	0,3	0,5	dB
1920,0 ... 1980,0 MHz		—	0,3	0,5	dB
Input VSWR		—	1,8	2,1	
1920,0 ... 1980,0 MHz		—	1,8	2,1	
Output VSWR		—	1,8	2,1	
1920,0 ... 1980,0 MHz		—	1,8	2,1	
Input amplitude balance (S_{31} / S_{21})		-1,0	0	1,4	dB
1920,0 ... 1980,0 MHz		-1,0	0	1,4	dB
Input phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	0	10	°
1920,0 ... 1980,0 MHz		-10	0	10	°
Attenuation	α				
50,0 ... 1350,0 MHz		40	45	—	dB
1350,0 ... 1800,0 MHz		29	31	—	dB
1800,0 ... 1880,0 MHz		20	22	—	dB
2110,0 ... 2170,0 MHz		23	25	—	dB
2170,0 ... 2300,0 MHz		30	33	—	dB
2300,0 ... 3200,0 MHz		35	40	—	dB
3200,0 ... 5000,0 MHz		45	55	—	dB
5000,0 ... 6000,0 MHz		40	45	—	dB



SAW Components

B7711


Low-Loss Filter for Mobile Communication

1950,0 MHz


Data Sheet



Transfer function:

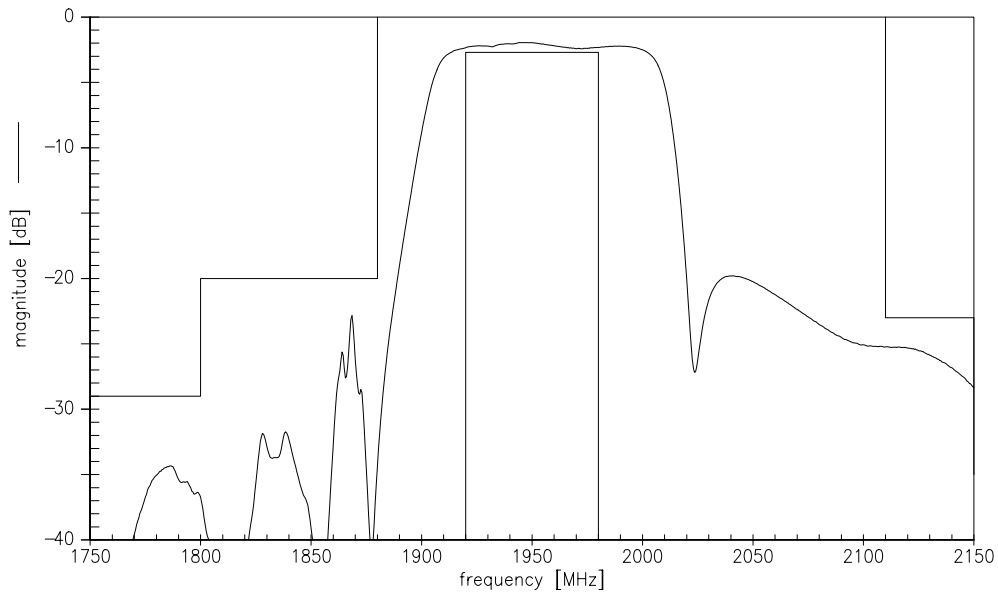

Transfer function (wide band):

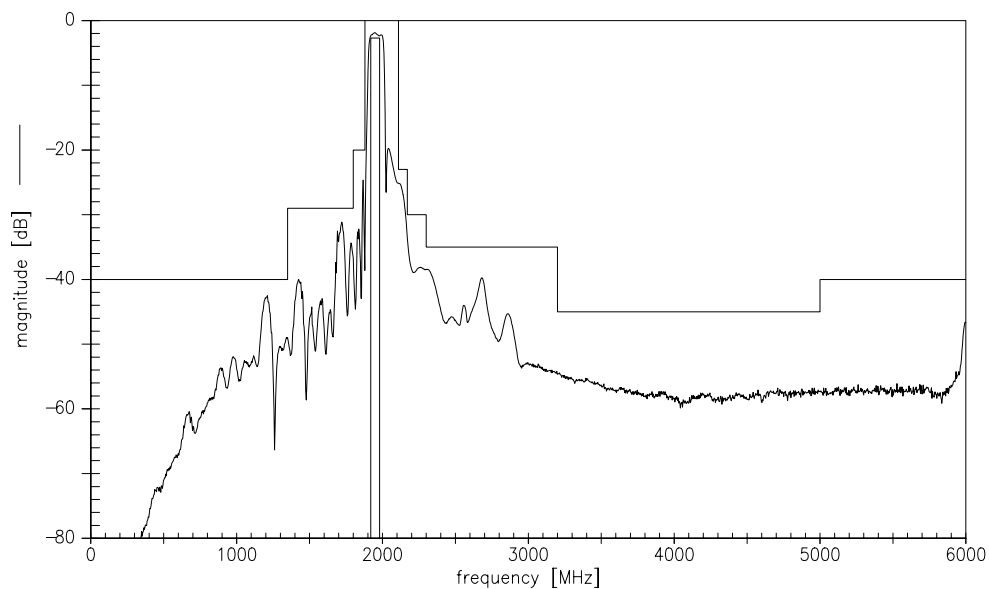



SAW Components

B7711


Low-Loss Filter for Mobile Communication

1950,0 MHz


Data Sheet



Input amplitude balance ($|S_{31}/S_{21}|$):

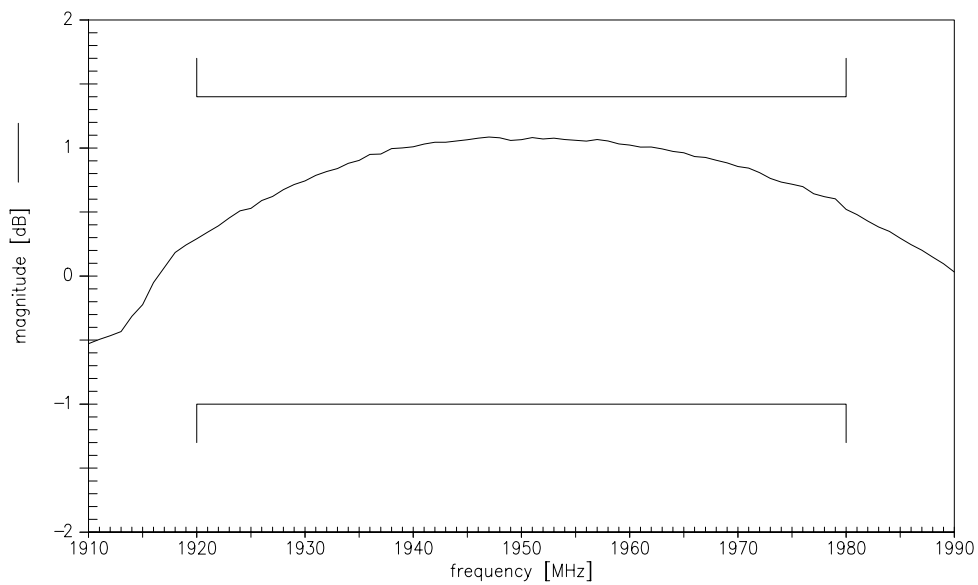

Input phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$):

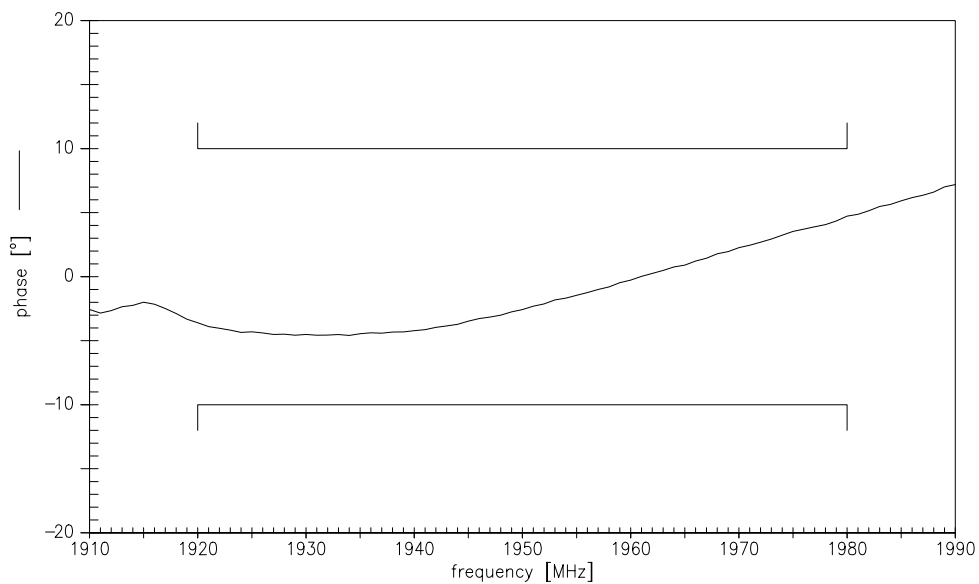



SAW Components

B7711

Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.