



SAW Components

Data Sheet R 853

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern. Overlaid on the globe is a large, stylized, 3D-looking "EPCOS" logo in a light gray color. The logo is tilted and appears to be floating or emerging from the globe. The background is dark and textured.



SAW Components

R 853

Resonator

423,22 MHz

Data Sheet


Ceramic package **QCC4A**

Features

- 1-port resonator
- Provides reliable, fundamental mode, quartz frequency stabilization i.e. in transmitters or local oscillators

Terminals


- Ni, gold plated

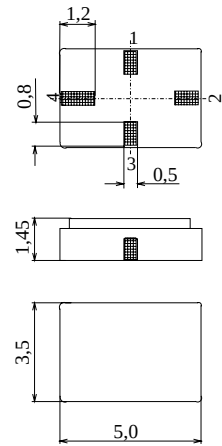

Dimensions in mm, approx. weight 0,1 g

Pin configuration

- | | |
|-----|----------------------------------|
| 1 | Input |
| 3 | Output, grounded in 1-port conf. |
| 2,4 | Ground (case) |



Type	Ordering code	Marking and Package according to	Packing according to
R 853	B39421-R 853-H210	C61157-A7-A86	F61074-V8120-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-40/+125	°C	between any terminals
Storage temperature range	T_{stg}	-40/+125	°C	
DC voltage	V_{DC}	12	V	
Source power	P_S	0	dBm	



SAW Components

R 853

Resonator

423,22 MHz

Data Sheet

Characteristics

Reference temperature: $T_A = 25\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency ¹⁾	f_c	423,17	423,22	423,27	MHz
Minimum insertion attenuation	$\alpha_{\min}$	—	1,1	1,5	dB
Unloaded quality factor	Q_U	8300	13500	—	
Ageing of f_c		—	—	-10/+50	ppm
Equivalent circuit elements					
Motional capacitance	C_1	—	1,96	—	fF
Motional inductance	L_1	—	72,15	—	μH
Motional resistance	R_1	—	14	19	Ω
Parallel capacitance ²⁾	C_0	—	2,6	—	pF
Temperature coefficient of frequency ³⁾	TC_f	—	-0,032	—	ppm/K ²
Turnover temperature	T_0	15	—	35	°C

¹⁾ Center frequency is defined as maximum of the real part of the admittance

²⁾ If used in two port configuration (pin 1-input, pin 3-output) C_0 is reduced by approx. 0,3 pF.

³⁾ Temperature dependence of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



SAW Components

R 853

Resonator

423,22 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE AE

P.O. Box 80 17 09, 81617 Munich, GERMANY

©.EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.