

Power Management Switch IC Series for PCs and Digital Consumer Product

2ch Large Current Output USB High Side Switch ICs



BD6512F, BD6513F, BD6516F, BD6517F, BD2042AFJ, BD2052AFJ

●Description

High side switch for USB is a high side switch having over current protection used in power supply line of universal serial bus (USB). Its switch unit has two channels of N-channel power MOSFET, and current of 500mA as USB standard can be flown to the respective channels. And, over current detection circuit, thermal shutdown circuit, under voltage lockout and soft start circuit are built in.

●Features

- 1) Dual N-MOS high side switch
- 2) Continuous current load 0.5A
- 3) Control input logic
Active-Low
Active-High
- 4) Soft start circuit
- 5) Over current detection
- 6) Thermal shutdown
- 7) Under voltage lockout
- 8) Open drain error flag output
- 9) Reverse-current protection when switch off
- 10) Flag output delay filter built in

●Applications

USB hub in consumer appliances, Car accessory, PC, PC peripheral equipment, and so forth

●Lineup

Parameter	BD6512F	BD6513F	BD6516F	BD6517F	BD2052AFJ	BD2042AFJ
Over current detection (A)	1.65	1.65				
Output current at short (A)	-	-	1.65	1.65	1.0	1.0
On resistance (mΩ)	100	100	110	110	100	100
Control input logic	High	Low	High	Low	High	Low
Reverse current flow blocking at switch off	-	-	○	○	○	○
Flag output delay filter	-	-	○	○	○	○

●Absolute Maximum Ratings
 ◎BD6512F/13F/16F/17F

Parameter	Symbol	Limits	Unit
Supply voltage	V _{DD}	-0.3 to 6.0	V
CTRL voltage	V _{CTRL}	-0.3 to V _{DD} +0.3	V
Flag voltage	V _{FLAG}	-0.3 to 6.0	V
Output voltage	V _{OUT}	-0.3 to V _{DD} +0.3 (BD6512F/13F)	V
		-0.3 to 6.0 (BD6516F/17F)	V
Storage temperature	T _{STG}	-55 to 150	°C
Power dissipation *1	P _d	560 *1	mW

◎BD2042AFJ/52AFJ

Parameter	Symbol	Limits	Unit
Supply voltage	V _{IN}	-0.3 to 6.0	V
EN,/EN voltage	V _{EN} , V _{/EN}	-0.3 to 6.0	V
/OC voltage	V _{/OC}	-0.3 to 6.0	V
/OC current	I _{S/OC}	10	mA
OUT voltage	V _{OUT}	-0.3 to 6.0	V
Storage temperature	T _{STG}	-55 to 150	°C
Power dissipation *1	P _d	560 ^{*1}	mW

*1 This value decreases 4.48mW/°C above Ta=25°C.

*2 Resistance radiation design is not doing.

●Operating conditions
 ◎BD6512F/13F/16F/17F

Parameter	Symbol	Limits	Unit
Supply voltage	V _{DD}	3.0 to 5.5	V
Operation temperature	T _{OPR}	-25 to 85	°C
Continuous output current	I _{LO}	0 to 500	mA

◎BD2042AFJ/52AFJ

Parameter	Symbol	Limits	Unit
Supply voltage	V _{IN}	2.7 to 5.5	V
Operation temperature	T _{OPR}	-40 to 85	°C
Continuous output current	I _{LO}	0 to 500	mA

●Electrical characteristics

◎BD6512F/13F($V_{DD}=5V$, $T_a=25^{\circ}C$, unless otherwise specified.)


Parameter	Symbol	Limits			Unit	Condition
		Min.	Typ.	Max.		
Operating current	I_{DD}	-	85	120	μA	$V_{CTRL}=5V$ (BD6512F), $0V$ (BD6513F) OUT=OPEN
		-	0.01	2	μA	$V_{CTRL}=0V$ (BD6512F), $5V$ (BD6513F) OUT=OPEN
Control input voltage	V_{CTRL}	-	-	0.7	V	CTRL Low Level Input
		2.5	-	-	V	CTRL High Level Input
Control input current	I_{CTRL}	-1	0.01	1	μA	$V_{CTRL}=0V$ or $5V$
On resistance	R_{ON}	-	100	130	$m\Omega$	$V_{DD}=5V, I_{OUT}=500mA$
		-	120	160	$m\Omega$	$V_{DD}=3.3V, I_{OUT}=500mA$
Turn on delay	T_{RD}	100	600	2000	μs	$R_L=10\Omega$
Turn on rise time	T_R	200	1500	6000	μs	$R_L=10\Omega$
Turn off delay	T_{FD}	-	3	20	μs	$R_L=10\Omega$
Turn off fall time	T_F	-	1	20	μs	$R_L=10\Omega$
UVLO threshold voltage	V_{UVLOH}	2.3	2.5	2.7	V	V_{DD} increasing
	V_{UVLOL}	2.1	2.3	2.5	V	V_{DD} decreasing
Thermal shutdown threshold	T_{TS}	-	135	-	$^{\circ}C$	
Flag output resistance	R_{FLAG}	-	16	40	Ω	$I_{FLAG}=5mA$
Flag off current	I_{FLAG}	-	0.01	1	μA	
Current limit threshold	I_{THLIM}	1.25	1.65	2.20	A	
Over current limit level	I_{LIM}	0.6	1.1	1.6	A	

Parameter	Symbol	Limits			Unit	Condition
		Min.	Typ.	Max.		
Current consumption	I _{DD}	-	100	140	μA	V _{CTRL} =5V(BD6516F), 0V(BD6517F) OUT=OPEN
		-	0.01	2	μA	V _{CTRL} =0V(BD6516F), 5V(BD6517F) OUT=OPEN
CTRL input voltage	V _{CTRL}	-	-	0.7	V	Low level input voltage
		2.5	-	-	V	High level input voltage
CTRL input current	I _{CTRL}	-1	0.01	1	μA	V _{CTRL} =0V or 5V
FLAG output resistance	R _{FLAG}	-	250	450	Ω	I _{FLAG} =1mA
FLAG output leak current	I _{FLAG}	-	0.01	1	μA	V _{FLAG} =5V
FLAG output delay	T _{DFL}	-	1	4	ms	
ON resistance	R _{ON}	-	110	150	mΩ	V _{DD} =5V, I _{OUT} =500mA
		-	140	180	mΩ	V _{DD} =3.3V, I _{OUT} =500mA
Short circuit output current	I _{SC}	1.2	1.65	2.2	A	V _{OUT} =0V
Output leak current	I _{LEAK}	-	-	10	μA	V _{CTRL} =0V(BD6516F), 5V(BD6517F)
Thermal shutdown threshold	T _{TS}	-	135	-	°C	At T _j increase
Output rise time	T _{ON1}	100	1300	4000	μs	R _L =10Ω
Output turn on delay time	T _{ON2}	200	1500	6000	μs	R _L =10Ω
Output fall time	T _{OFF1}	-	1	20	μs	R _L =10Ω
Output turn off delay time	T _{OFF2}	-	3	20	μs	R _L =10Ω

Parameter	Symbol	Limits			Unit	Condition
		Min.	Typ.	Max.		
Operating Current	I_{DD}	-	110	140	μA	$V_{/EN} = 0V$, OUT = OPEN (BD2042AFJ) $V_{EN} = 5V$, OUT = OPEN (BD2052AFJ)
Standby Current	I_{STB}	-	0.01	1	μA	$V_{/EN} = 5V$, OUT = OPEN (BD2042AFJ) $V_{EN} = 0V$, OUT = OPEN (BD2052AFJ)
/EN input voltage	$V_{/EN,EN}$	2.0	-	-	V	High input
		-	-	0.8	V	Low input
		-	-	0.4	V	Low input $2.7V \leq V_{IN} \leq 4.5V$
/EN input current	$I_{/EN,EN}$	-1.0	0.01	1.0	μA	$V_{/EN,EN} = 0V$ or $V_{/EN,EN} = 5V$
/OC output LOW voltage	$V_{/OC}$	-	-	0.5	V	$I_{/OC} = 5mA$
/OC output leak current	$I_{L/OC}$	-	0.01	1	μA	$V_{/OC} = 5V$
ON resistance	R_{ON}	-	100	130	$m\Omega$	$I_{OUT} = 500mA$
Output current at short	I_{SC}	0.7	1.0	1.3	A	$V_{IN} = 5V$, $V_{OUT} = 0V$, $C_L = 100\mu F$ (RMS)
Output rise time	T_{ON1}	-	1.8	10	ms	$R_L = 10\Omega$, $C_L = OPEN$
Output turn on time	T_{ON2}	-	2.1	20	ms	
Output fall time	T_{OFF1}	-	1	20	μs	
Output turn off time	T_{OFF2}	-	3	40	μs	
UVLO threshold	V_{TUVH}	2.1	2.3	2.5	V	Increasing V_{IN}
	V_{TUVL}	2.0	2.2	2.4	V	Decreasing V_{IN}

● Measurement circuit

◎BD6512F/13F/16F/17F

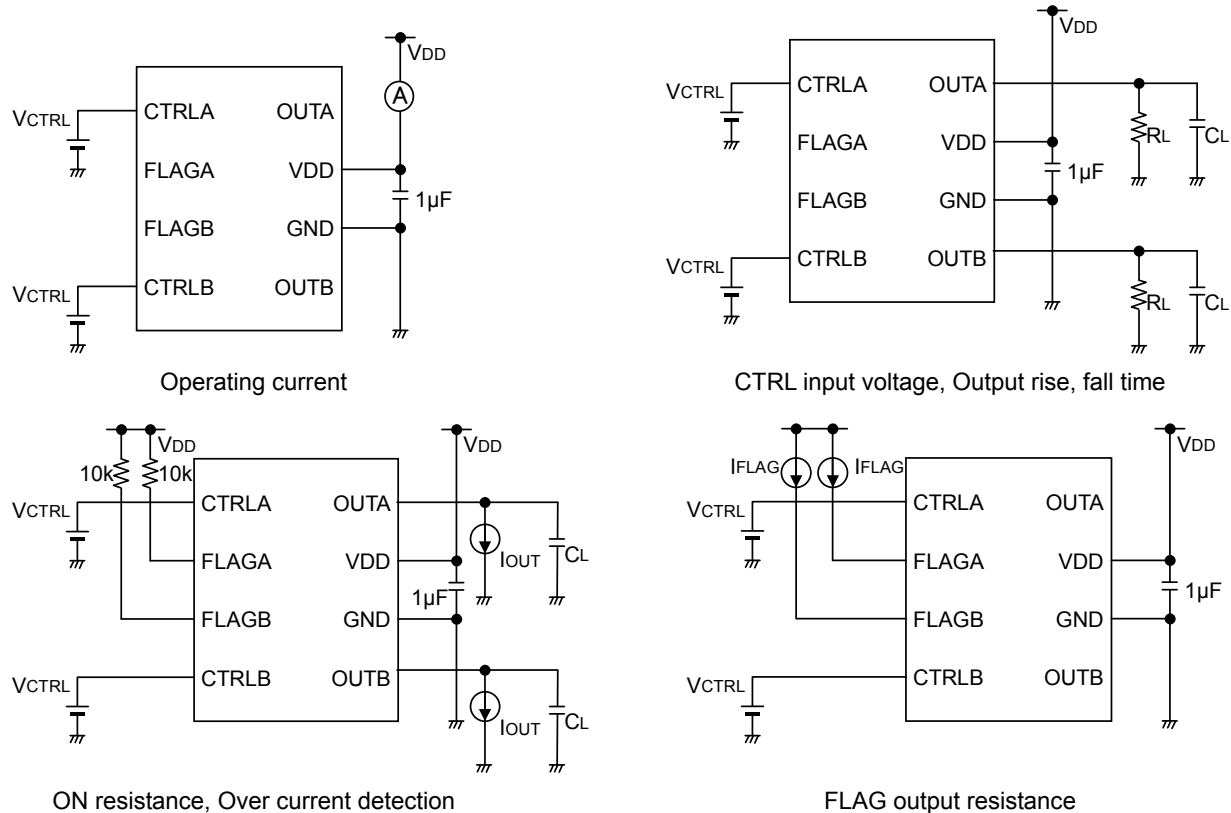

◎BD2042AFJ/52AFJ


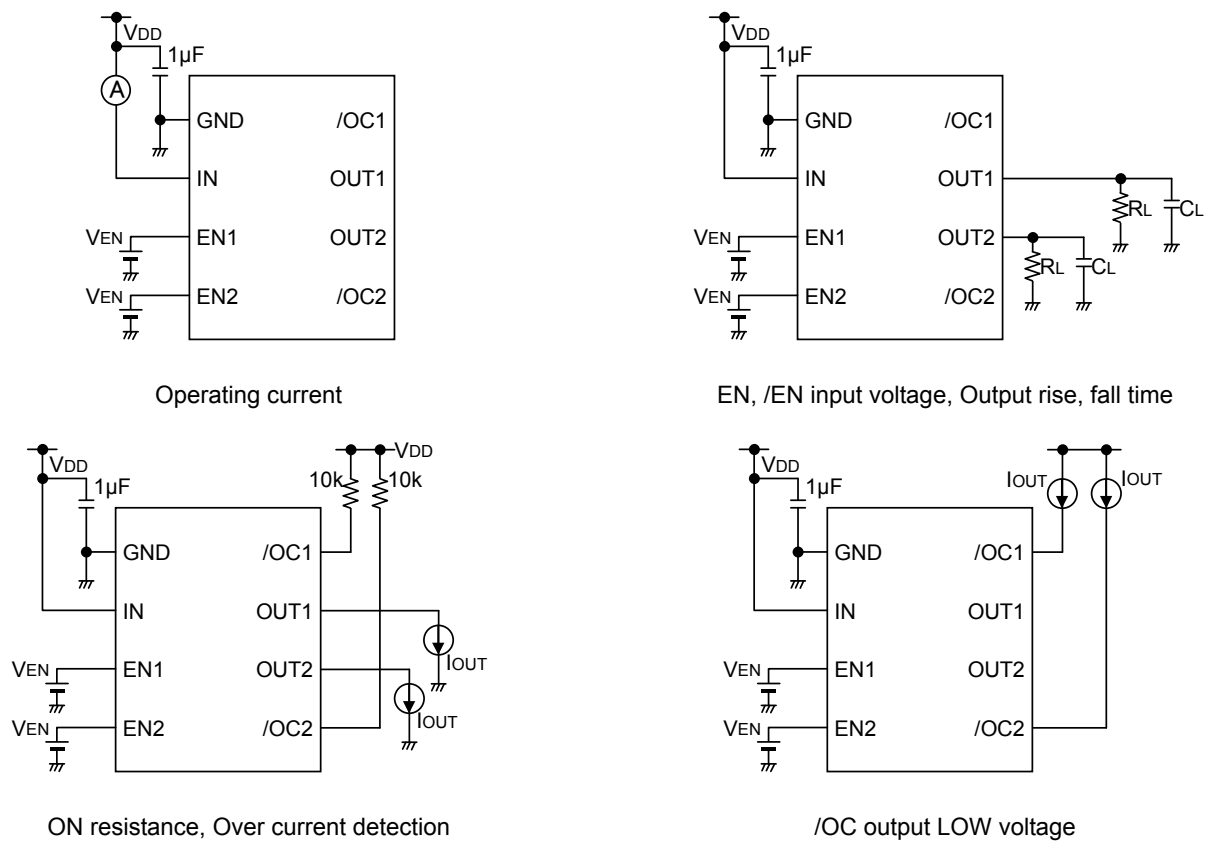



Fig.1 Measurement circuit

●Timing diagram


◎BD6513F

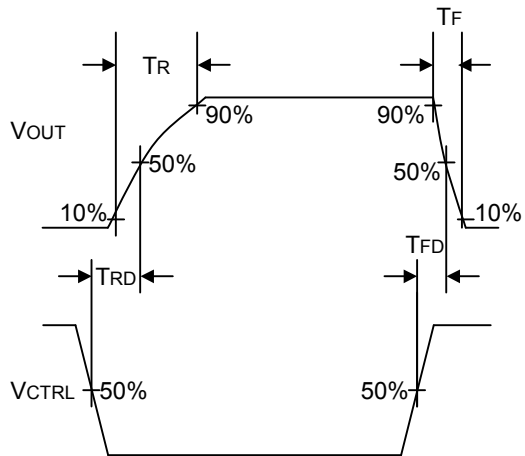

◎BD6512F

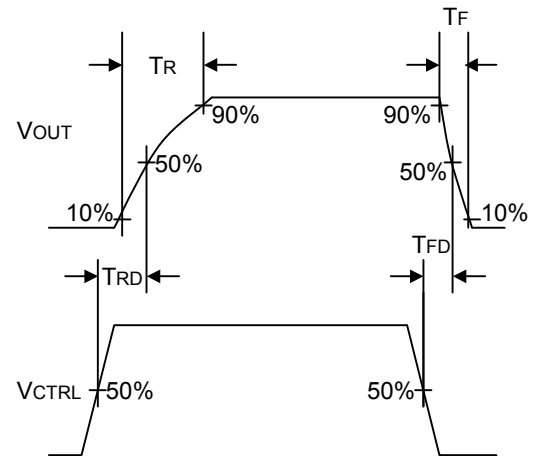

◎BD6515F/BD2042AFJ

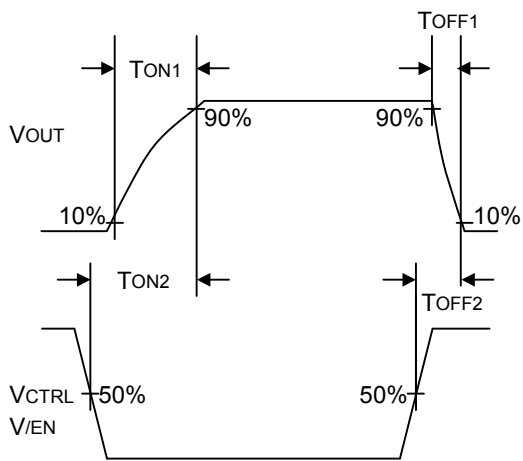

◎BD6516F/BD2052AFJ

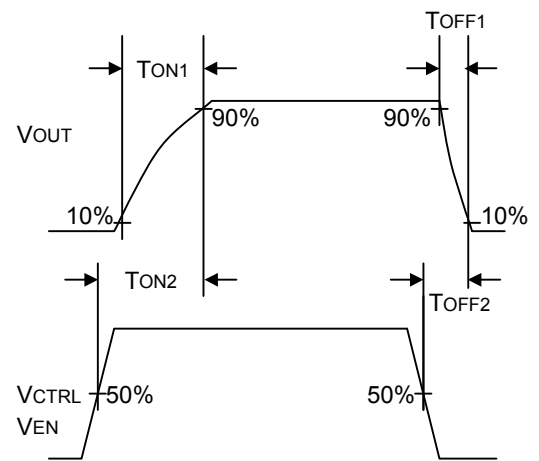
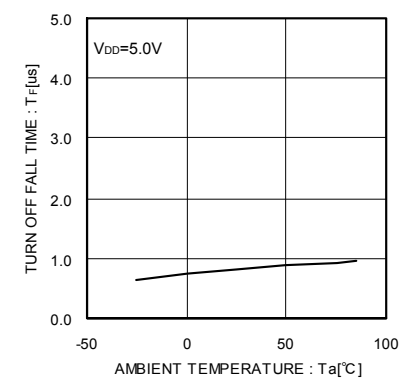
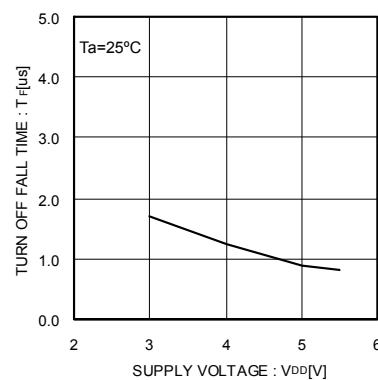
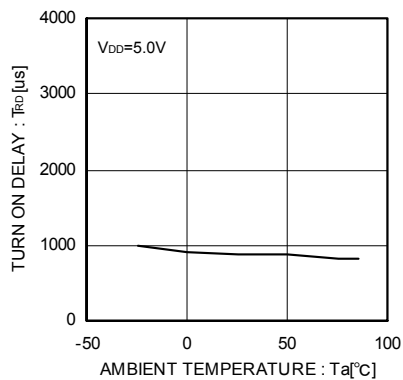
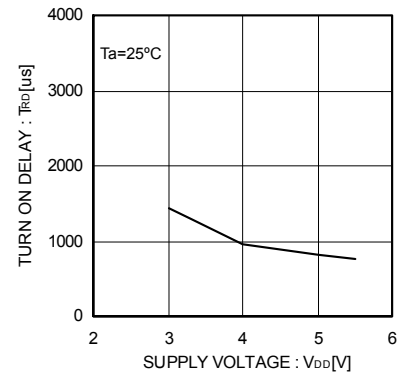
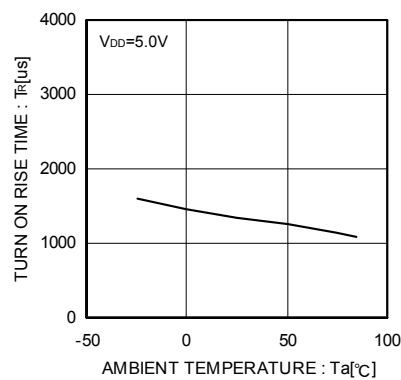
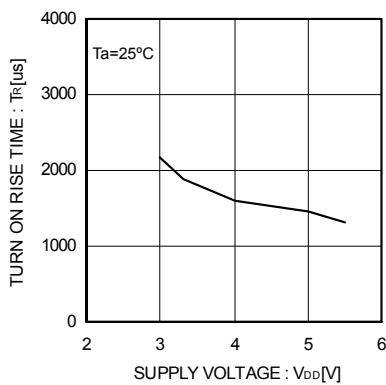
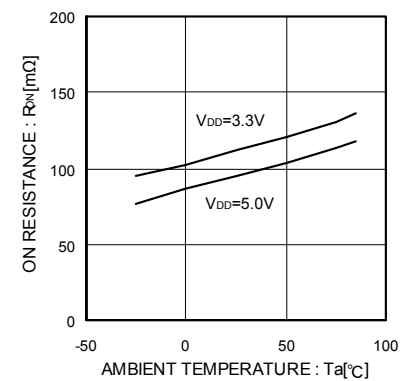
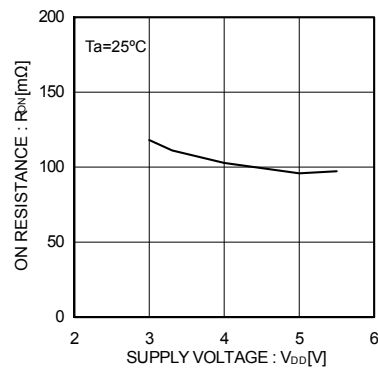
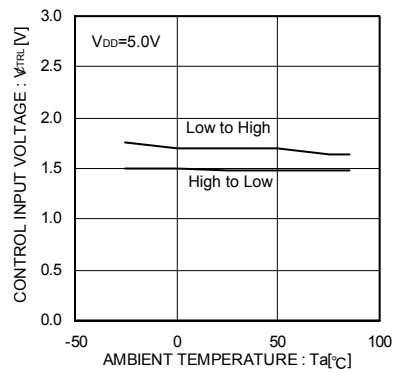
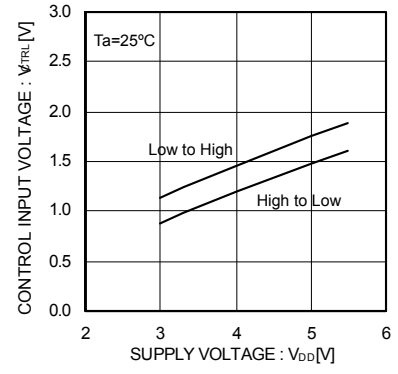
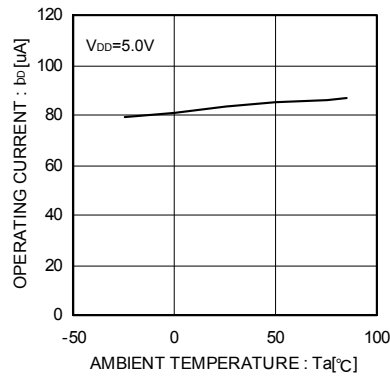
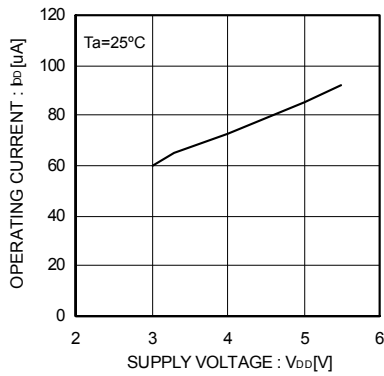


Fig.2 Timing diagram

●Reference data

◎BD6512F/13F



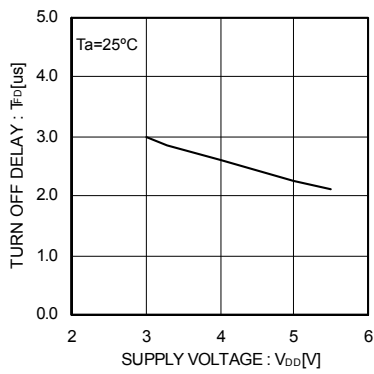


Fig.15 Output fall delay time

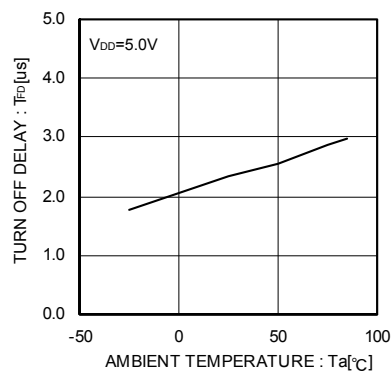


Fig.16 Output fall delay time

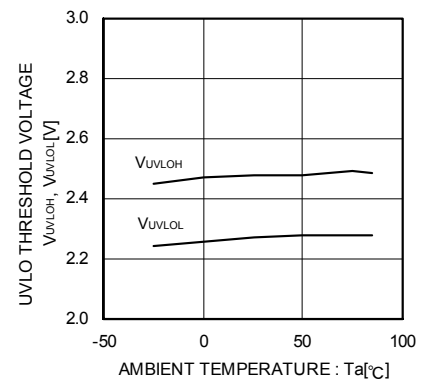


Fig.17 UVLO threshold voltage

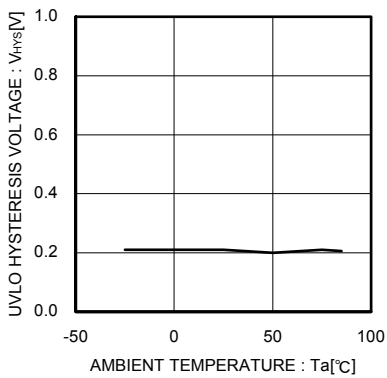


Fig.18 UVLO hysteresis voltage

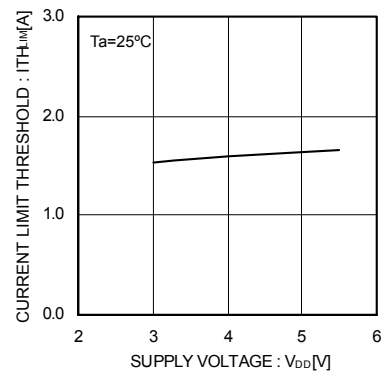


Fig.19 Over current threshold

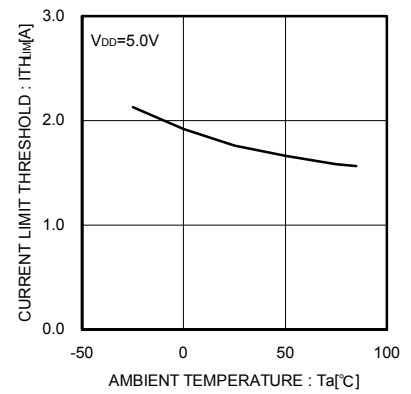


Fig.20 Over current threshold

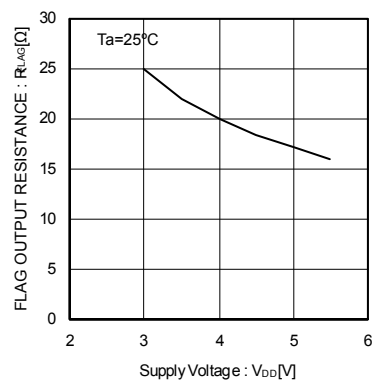


Fig.21 Flag output resistance

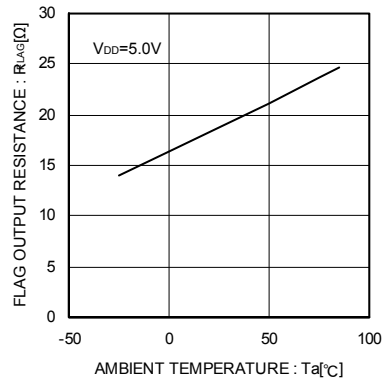


Fig.22 Flag output resistance

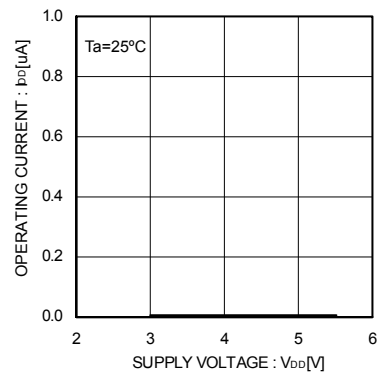


Fig.23 Operating current
CTRL Disable

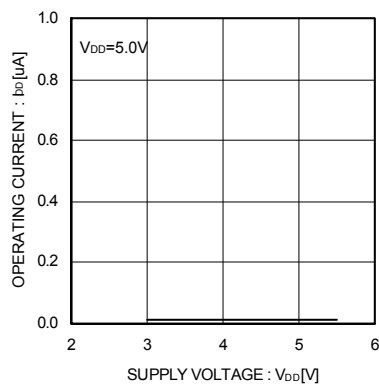


Fig.24 Operating current
CTRL Disable

●Reference data

◎BD6516F/17F

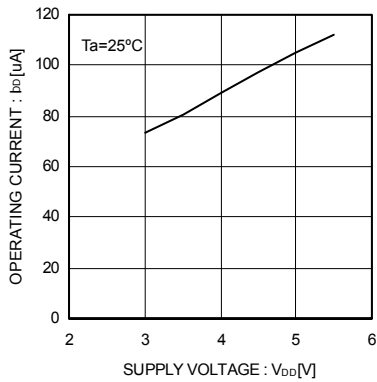


Fig.25 Operating current

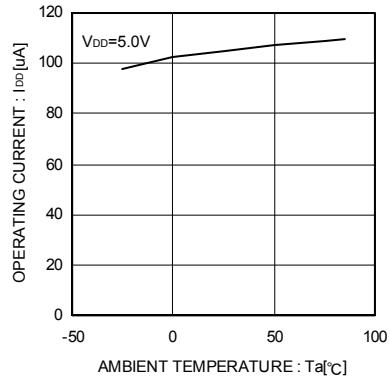


Fig.26 Operating current

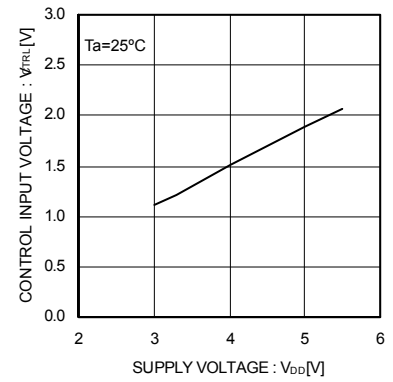


Fig.27 CTRL input voltage
(BD6516F)

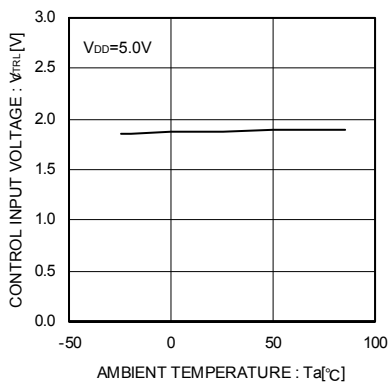


Fig.28 CTRL input voltage
(BD6516F)

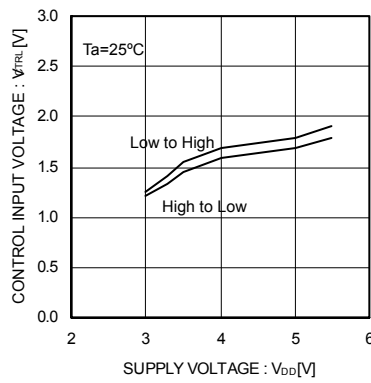


Fig.29 CTRL input voltage
(BD6517F)

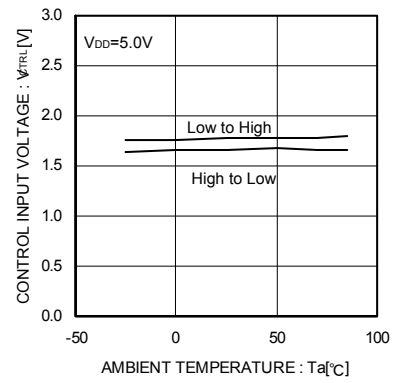


Fig.30 CTRL input voltage
(BD6517F)

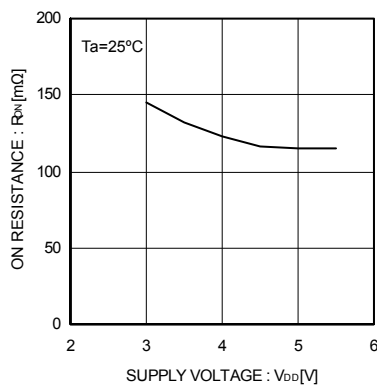


Fig.31 ON resistance

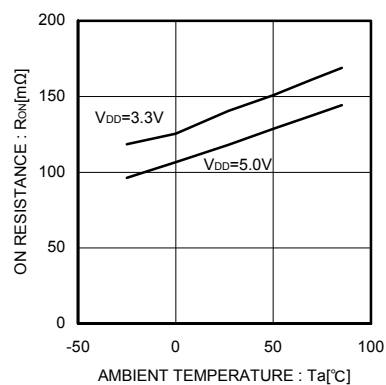


Fig.32 ON resistance

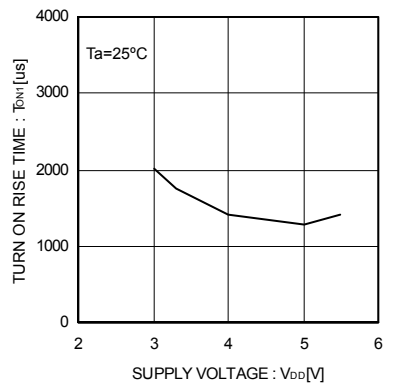


Fig.33 Output rise time

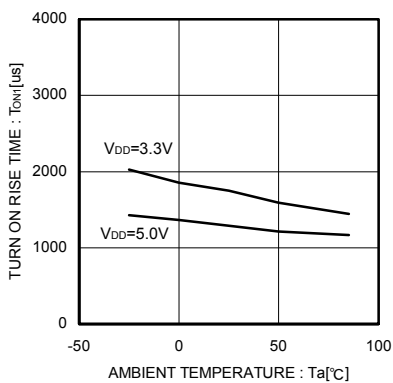


Fig.34 Output rise time

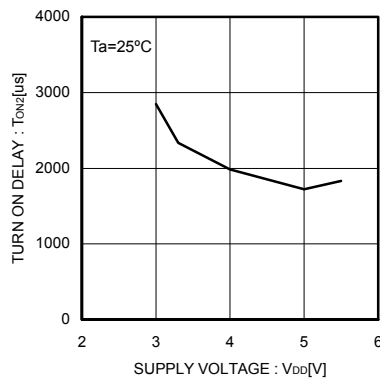


Fig.35 Output rise delay time

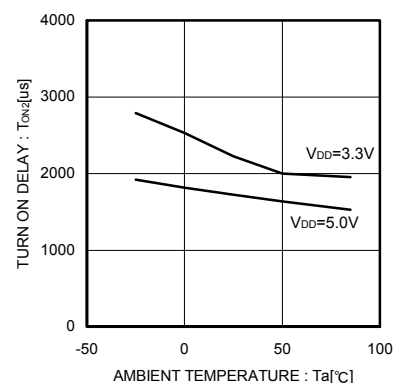


Fig.36 Output rise delay time

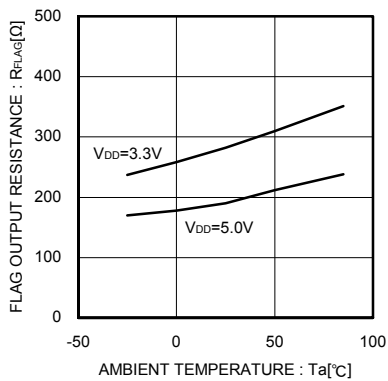


Fig.37 Flag output resistance

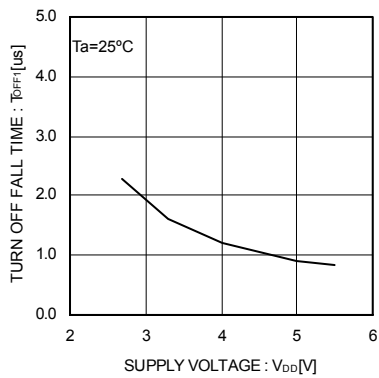


Fig.38 Output fall time

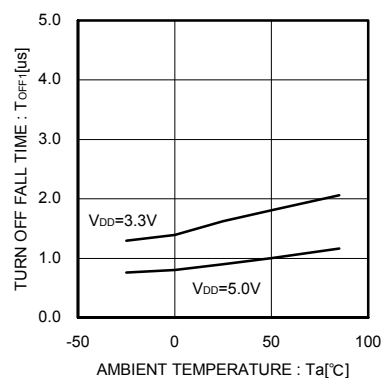


Fig.39 Output fall time

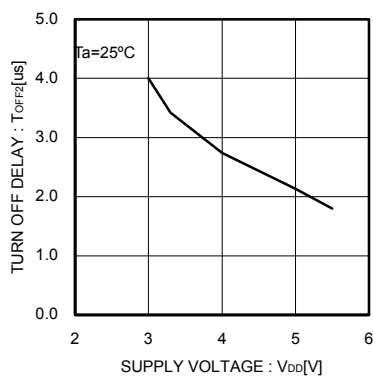


Fig.40 Output fall delay time

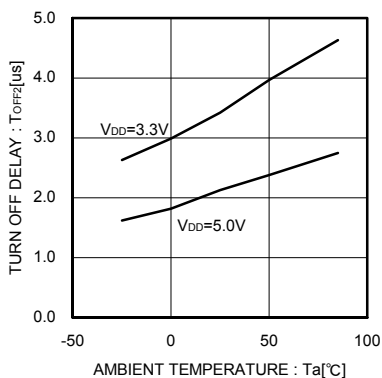


Fig.41 Output fall delay time

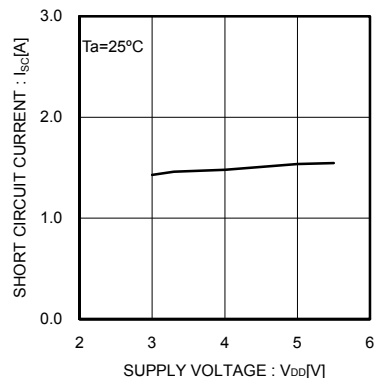


Fig.42 Shortcircuit output current

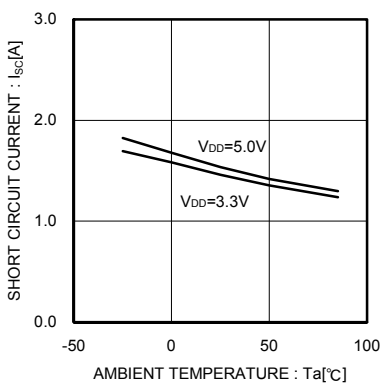


Fig.43 Shortcircuit output current

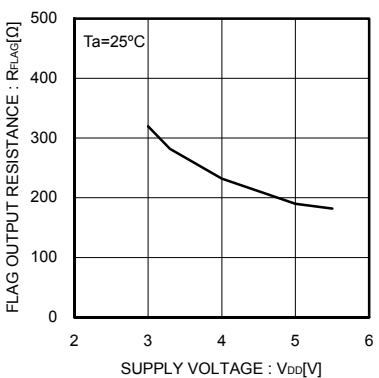


Fig.44 Flag output resistance

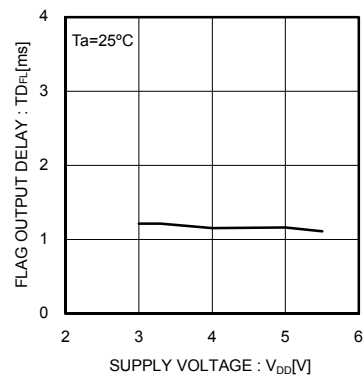


Fig.45 Flag output delay

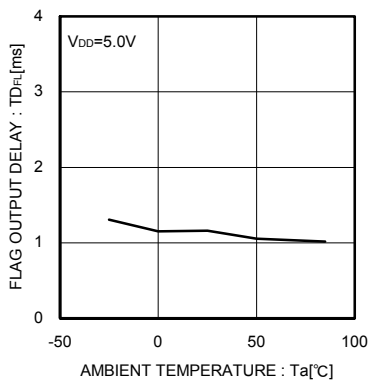


Fig.46 Flag output delay

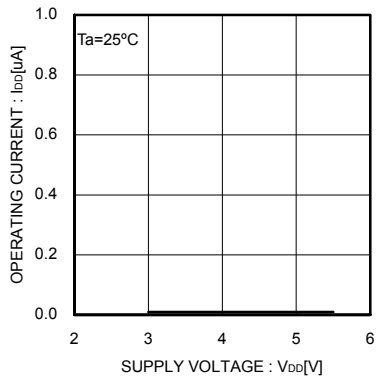


Fig.47 Operating current
CTRL Disable

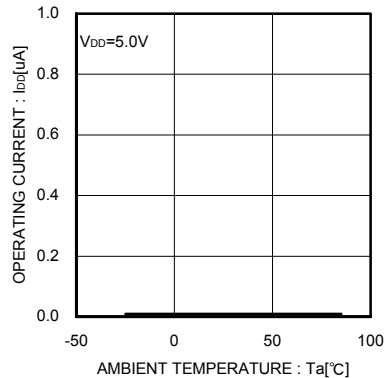


Fig.48 Operating current
CTRL Disable

●Reference data

◎BD2042AFJ/52AFJ

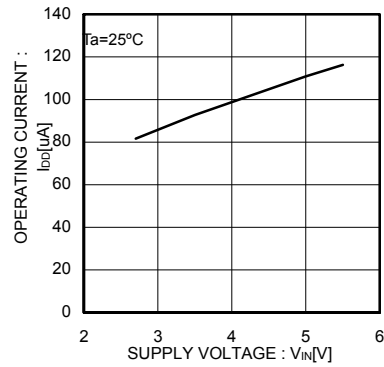


Fig.49 Operating current
EN,/EN Enable

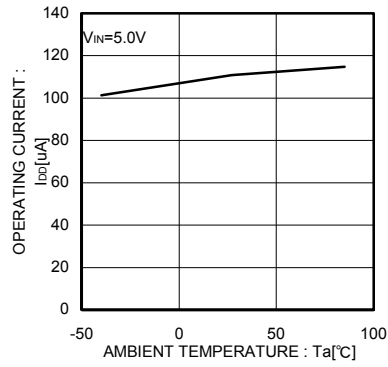


Fig.50 Operating current
EN,/EN Enable

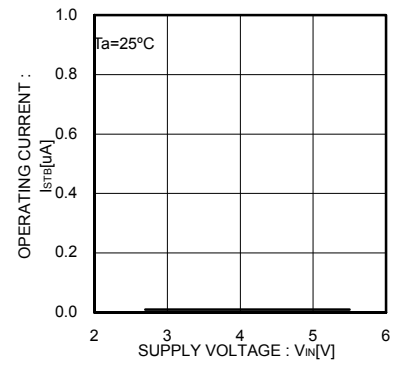


Fig.51 Operating current
EN,/EN Disable

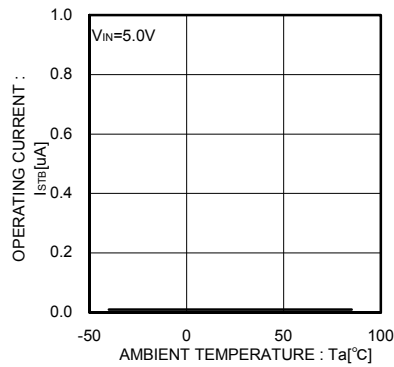


Fig.52 Operating current
EN,/EN Disable

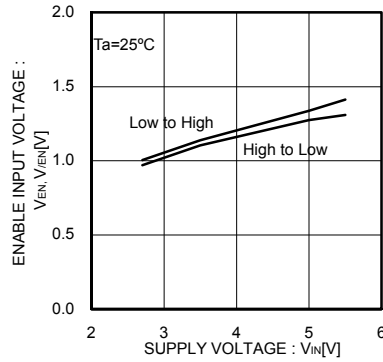


Fig.53 EN,/EN input voltage

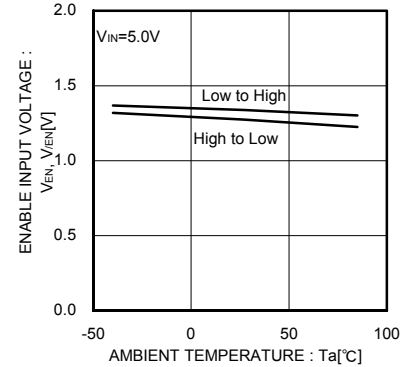


Fig.54 EN,/EN input voltage

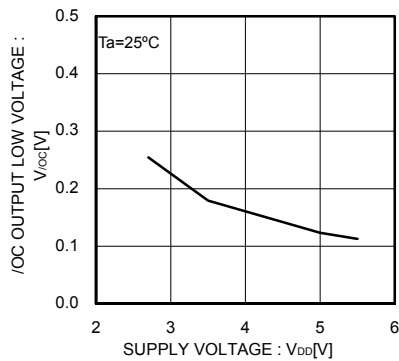


Fig.55 /OC output LOW voltage

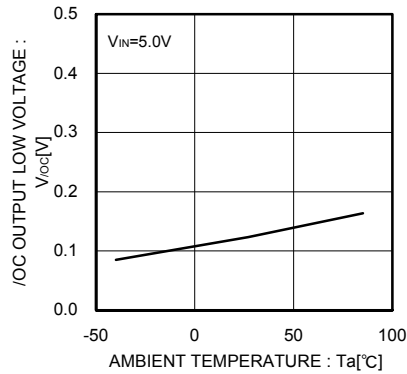


Fig.56 /OC output LOW voltage

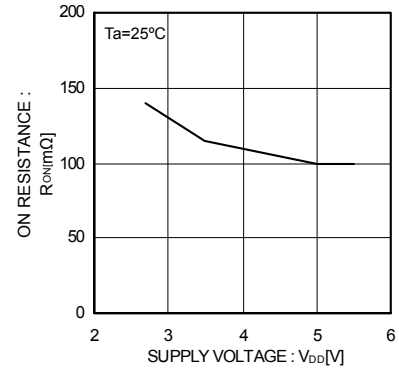


Fig.57 ON resistance

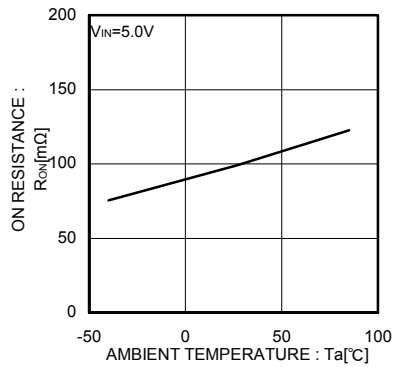


Fig.58 ON resistance

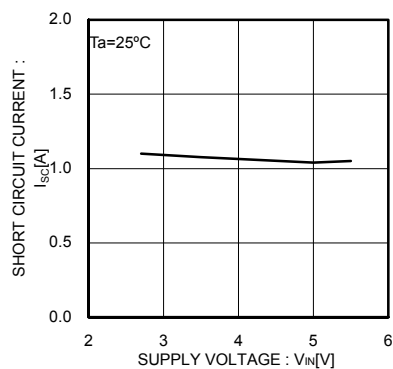


Fig.59 Output current at shortcircuit

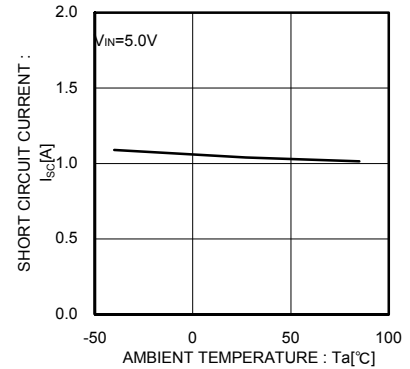


Fig.60 Output current at shortcircuit

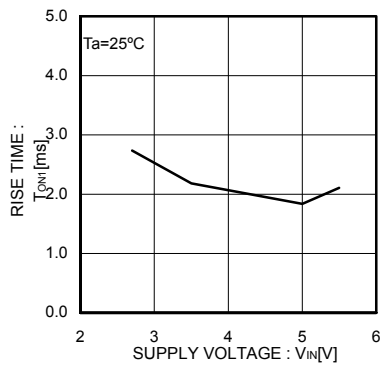


Fig.61 Output rise time

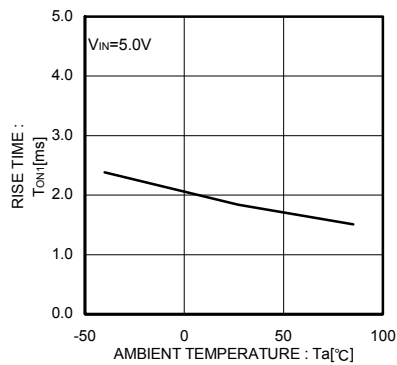


Fig.62 Output rise time

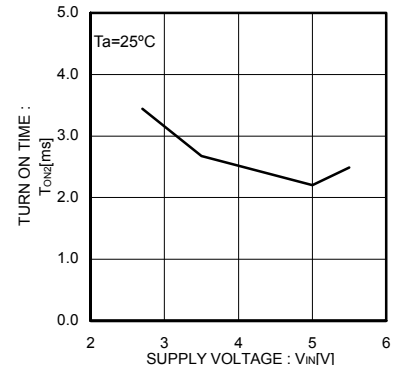


Fig.63 Output turn on time

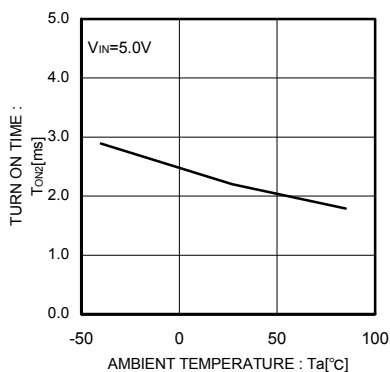


Fig.64 Output turn on time

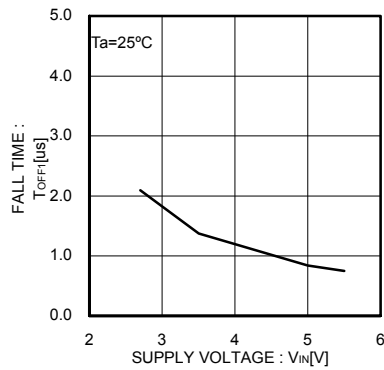


Fig.65 Output fall time

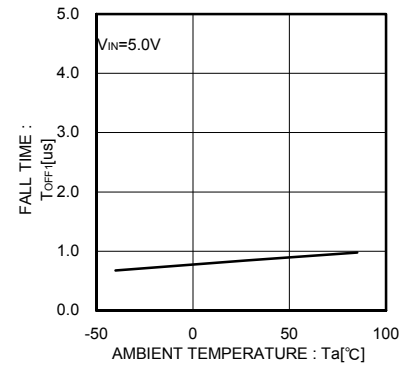


Fig.66 Output fall time

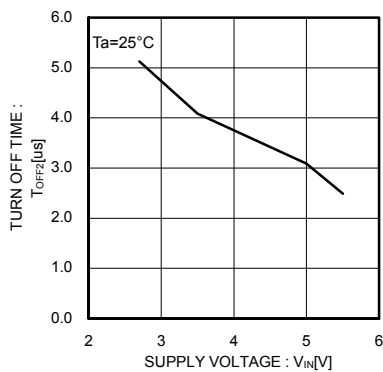


Fig.67 Output turn off time

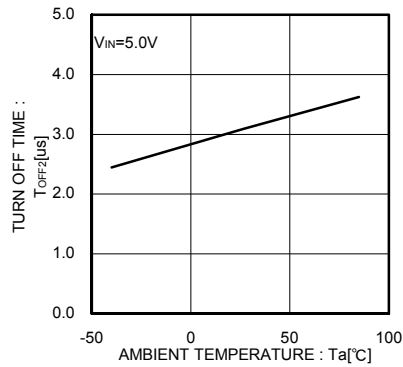


Fig.68 Output turn off time

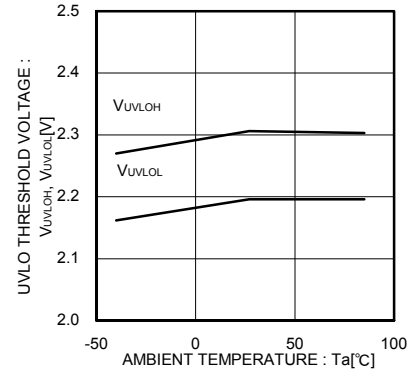


Fig.69 UVLO threshold voltage

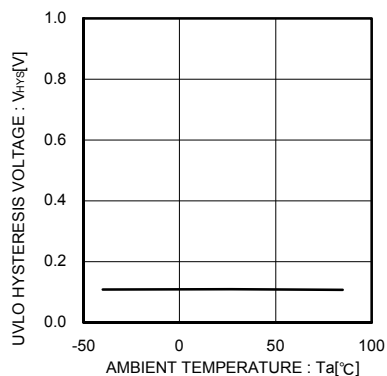


Fig.70 UVLO hysteresis voltage

● Waveform data

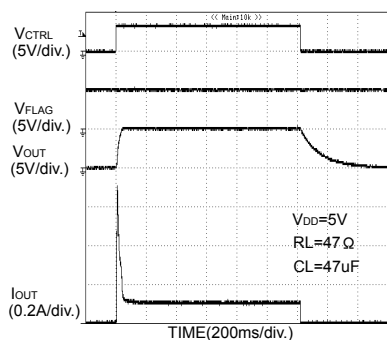


Fig.71 Output rise, fall characteristic
(BD6512F)

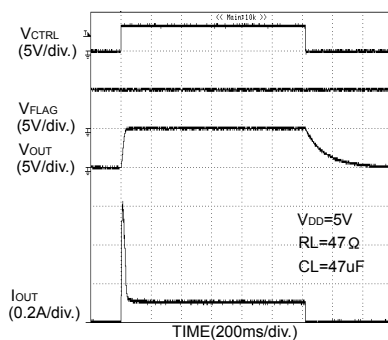


Fig.72 Output rise, fall characteristic
(BD6516F)

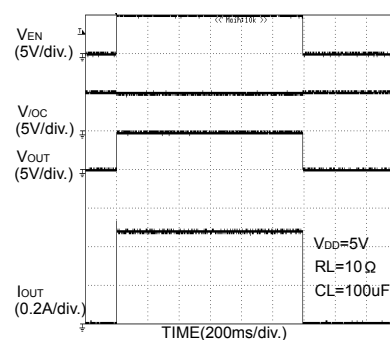


Fig.73 Output rise, fall characteristic
(BD2052AFJ)

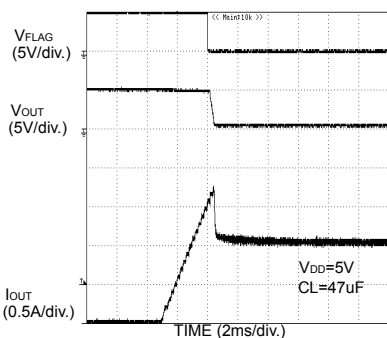


Fig.74 Over current response
Ramped load
(BD6512F)

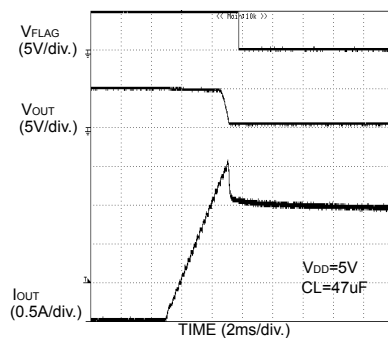


Fig.75 Over current response
Ramped load
(BD6516F)

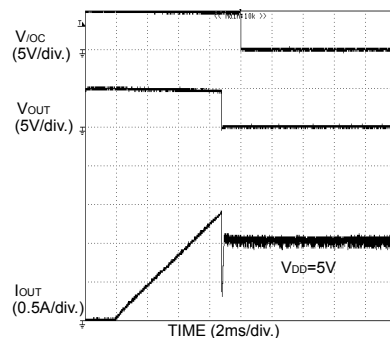


Fig.76 Over current response
Ramped load
(BD2052AFJ)

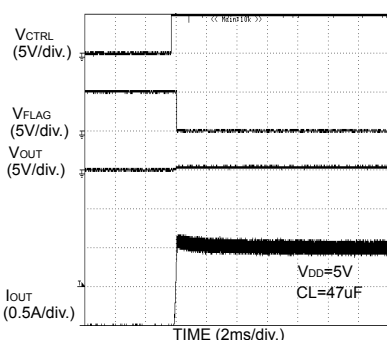


Fig.77 Over current response
Enable to shortcircuit (BD6512F)

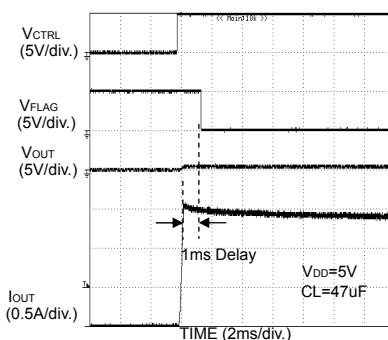


Fig.78 Over current response
Enable to shortcircuit (BD6516F)

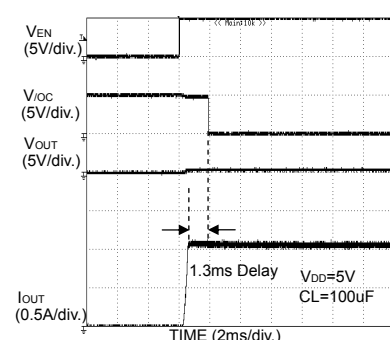


Fig.79 Over current response
Enable to shortcircuit (BD2052AFJ)

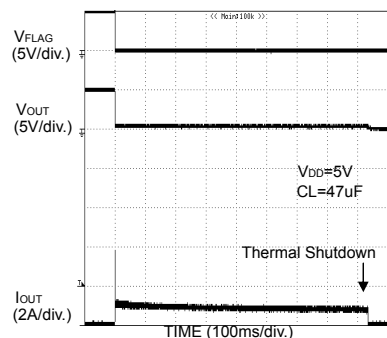


Fig.80 Over current response
Output shortcircuit at Enable (BD6512F)

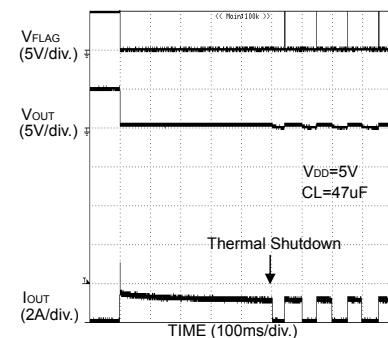


Fig.81 Over current response
Output shortcircuit at Enable (BD6516F)

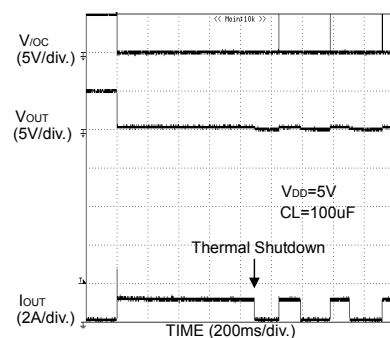


Fig.82 Over current response
Output shortcircuit at Enable (BD2052AFJ)

Regarding the output rise/fall and over current detection characteristics of BD6513F, BD6517F, BD2042AFJ refer to the characteristic of BD6512F, BD6516F, BD2052AFJ.

●Block diagram

◎BD6512F/13F/16F/17F

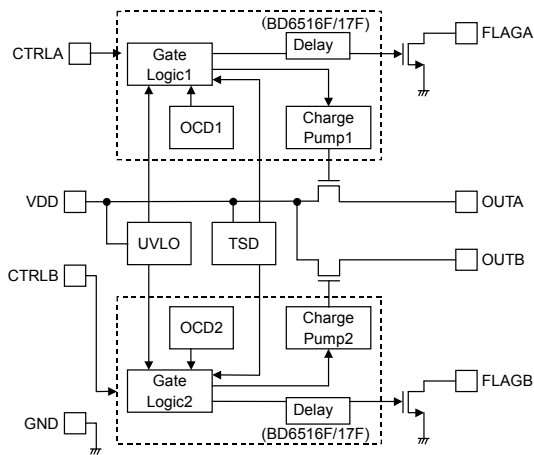


Fig.83 Block diagram

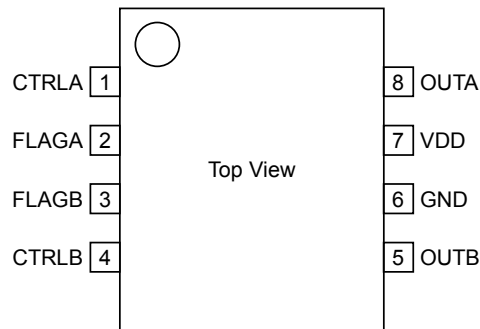


Fig.84 Pin Configuration

●Pin description

◎BD6512F/13F/16F/17F

Pin No.	Symbol	I / O	Pin function
1, 4	CTRLA CTRLB	I	Enable input. Switch on at Low level. (BD6513F/17F) Switch on at High level. (BD6512F/16F) High level input > 2.5V, Low level input < 0.7V.
2, 3	FLAGA FLAGB	O	Error flag output. Low at over current, thermal shutdown. Open drain output.
5, 8	OUTB OUTA	O	Switch output.
6	GND	I	Ground.
7	VDD	I	Power supply input. Input terminal to the switch and power supply input terminal of the internal circuit.

●I/O circuit

◎BD6512F/13F/16F/17F

Symbol	Pin No.	Equivalent circuit (BD6512F/13F)	Equivalent circuit (BD6516F/17F)
CTRLA CTRLB	1, 4		
FLAGA FLAGB	2, 3		
OUTA OUTB	5, 8		

●Block diagram

◎BD2042AFJ/52AFJ

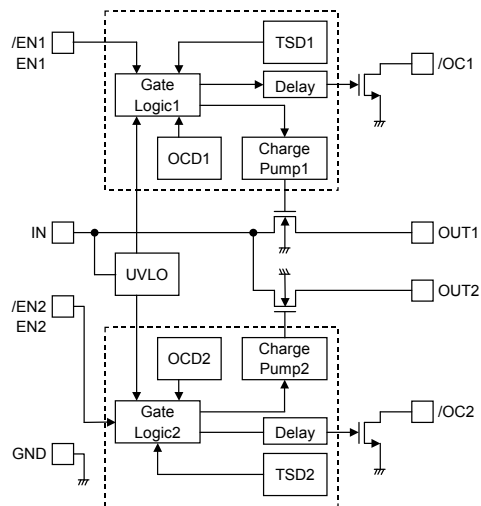


Fig.85 Block diagram

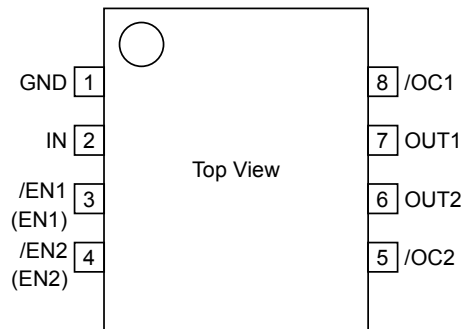


Fig.86 Pin Configuration

●Pin description

◎BD2042AFJ/52AFJ

Pin No.	Symbol	I / O	Pin function
1	GND	I	Ground.
2	IN	I	Power supply input. Input terminal to the switch and power supply input terminal of the internal circuit.
3, 4	/EN, EN	I	Enable input. Switch on at Low level. (BD2042AFJ) Switch on at High level. (BD2052AFJ) High level input > 2.0V, Low level input < 0.8V.
5, 8	/OC	O	Error flag output. Low at over current, thermal shutdown. Open drain output.
6, 7	OUT	O	Switch output.

●I/O circuit

◎BD2042AFJ/52AFJ

Symbol	Pin No	Equivalent circuit
/EN1(EN1) /EN2(EN2)	3, 4	
/OC1 /OC2	5, 8	
OUT1 OUT2	6, 7	

●Functional description

1. Switch operation

VDD(IN) pin and OUT pin are connected to the drain and the source of switch MOSFET respectively. And the VDD(IN) pin is used also as power source input to internal control circuit.

When the switch is turned on from CTRL(EN) control input, VDD(IN) and OUT is connected. In a normal condition, current flows from VDD to OUT. If voltage of OUT is higher than VDD, current flows from OUT to VDD, since the switch is bidirectional.

◎BD6512F/13F

There is a parasitic diode between the drain and the source of switch MOSFET. Therefore, even when the switch is off, if the voltage of OUT is higher than that of VDD, current flows from OUT to VDD.

◎BD6516F/17F/BD2042AFJ/52AFJ

There is not parasitic diode, it is possible to prevent current from flowing reversely from OUT to VDD.

2. Thermal shutdown (TSD)

Thermal shut down circuit turns off the switch and outputs an error flag when the junction temperature in chip exceeds a threshold temperature. The thermal shut down circuit works when either of two control signals is active. In BD6512F/13F/16F/17F, the switches of both OUTA and OUTB become off and error flags are output to the both. BD2042AFJ/52AFJ have dual thermal shutdown threshold. Since thermal shutdown works at a lower junction temperature when an overcurrent occurs, only the switch of an overcurrent state become off and error flag is output.

◎BD6510F/12F/13F

The switch off status of the thermal shut down is latched. Therefore, even when the junction temperature goes down, switch off and error flag output status are maintained. To release the latch, it is necessary to input a signal to switch off to CTRL pin or make UVLO status. When the switch on signal is input or UVLO is released, the switch on and error flag output are recovered.

◎BD6516F/17F/BD2042AFJ/52AFJ

Thermal shut down action has hysteresis. Therefore, when the junction temperature goes down, switch on and error flag output automatically recover. However, until cause of junction temperature increase such as output shortcircuit is removed or the switch is turned off, thermal shut down detection and recovery are repeated.

3. Over current detection, limit circuit

The over current detection circuit limits current and outputs error flag when current flowing in each switch MOSFET exceeds a specified value. There are three types of response against over current. The over current detection, limit circuit works when the switch is on (CTRL · EN signal is active).

3-1 When the switch is turned on while the output is in shortcircuit status

When the switch is turned on while the output is in shortcircuit status, the switch become current limit mode soon.

3-2 When the output shortcircuits while the switch is on

When the output shortcircuits or large capacity is connected while the switch is on, very large current flows until the over current limit circuit responds. When the current detection, limit circuit works, current limitation is carried out.

3-3 When the output current increases gradually

When the output current increases gradually, current limitation does not work until the output current exceeds the over current detection value. When it exceeds the detection value, current limitation is carried out.

4. Under voltage lockout(UVLO)

When the supply voltage is below UVLO threshold level, UVLO circuit turns off switch to prevent malfunction. The UVLO circuit works when either of two control signals is active.

◎BD6512F/13F

UVLO circuit prevents the switch from turning on until the V_{DD} exceeds 2.5V(Typ.). If the V_{DD} drops below 2.3V(Typ.) while the switch turns on, then UVLO shuts off the switch.

◎BD2042AFJ/52AFJ

UVLO circuit prevents the switch from turning on until the V_{IN} exceeds 2.3V(Typ.). If the V_{IN} drops below 2.2V(Typ.) while the switch turns on, then UVLO shuts off the switch. UVLO has hysteresis of a 100mV(Typ.).

5. Error flag output

Error flag output is N-MOS open drain output.

◎BD6512F/13F

At detection of over current detection, thermal shutdown, UVLO, Low level is output.

◎BD6516F/17F/BD2042AFJ/52AFJ

At detection of over current detection, thermal shutdown, Low level is output. Error flag output at over current detection has delay filter. This delay filter prevents instantaneous current detection such as inrush current at switch on, hot plug from being informed to outside.

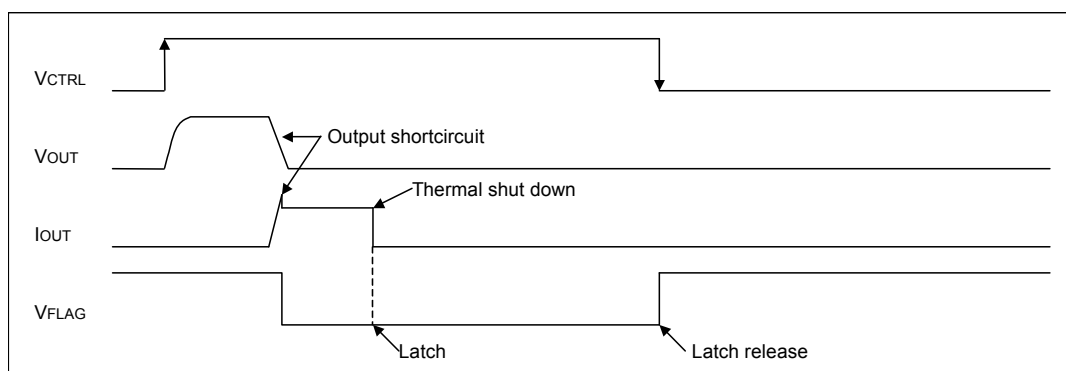


Fig.87 BD6512F/13F over current detection, thermal shutdown timing
(V_{CTRL} of BD6513F active Low)

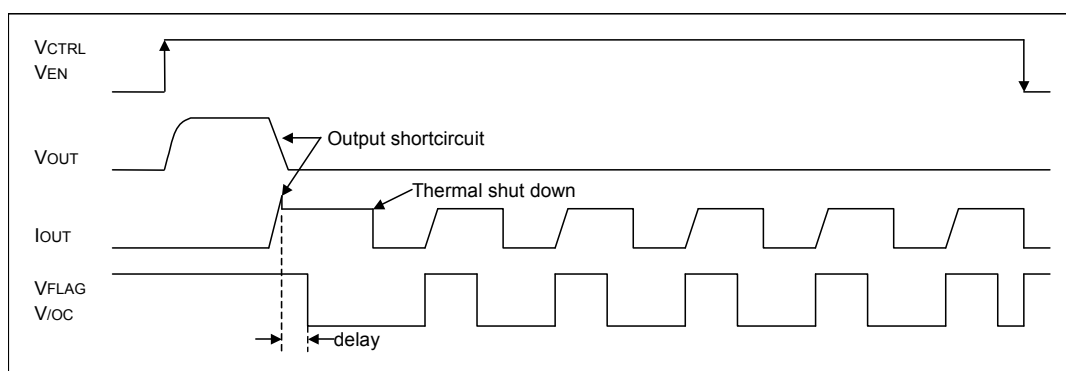


Fig.88 BD6516F/17F/BD2042AFJ/52AFJ over current detection, thermal shutdown timing
(V_{CTRL} , V_{EN} of BD6517F/BD2042AFJ active Low)

●Typical application circuit

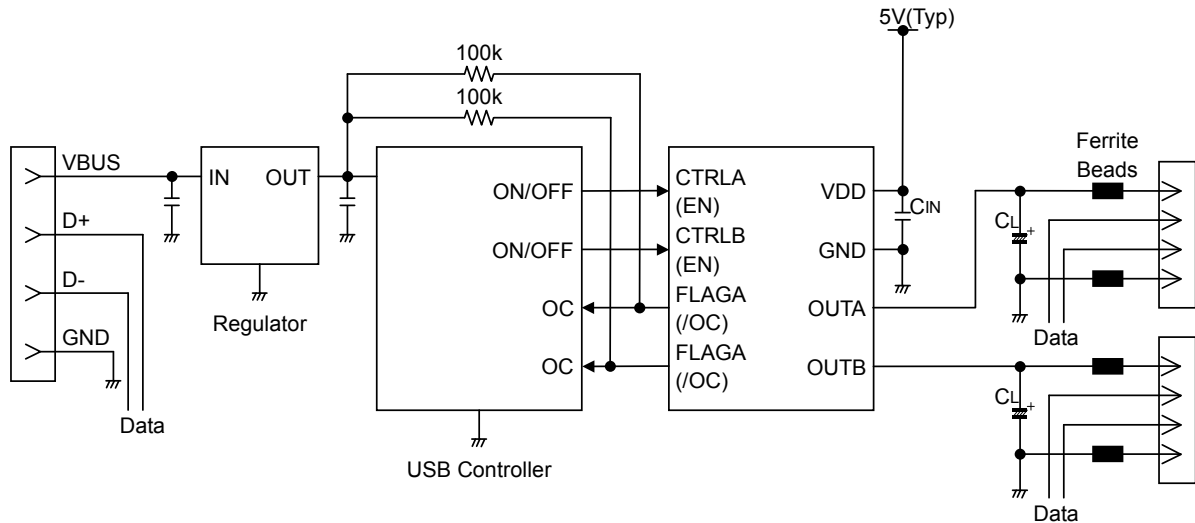


Fig.89 Typical application circuit

●Application information

When excessive current flows owing to output shortcircuit or so, ringing occurs by inductance of power source line to IC, and may cause bad influences upon IC operations. In order to avoid this case, connect a bypass capacitor by VDD pin and GND pin of IC. 1 μ F or higher is recommended.

Pull up flag output by resistance 10k Ω ~ 100k Ω .

Set up value which satisfies the application as C_L and Ferrite Beads.

This system connection diagram doesn't guarantee operating as the application.

The external circuit constant and so on is changed and it uses, in which there are adequate margins by taking into account external parts or dispersion of IC including not only static characteristics but also transient characteristics.

In BD6510F/12F/13F, there are cases where over current detection error flag is output to inrush current at switch on or at insertion of active line of peripheral devices. In the case of erroneous detection in BD6512F/13F, use RC filter shown in Fig. 90 for FLAG output.

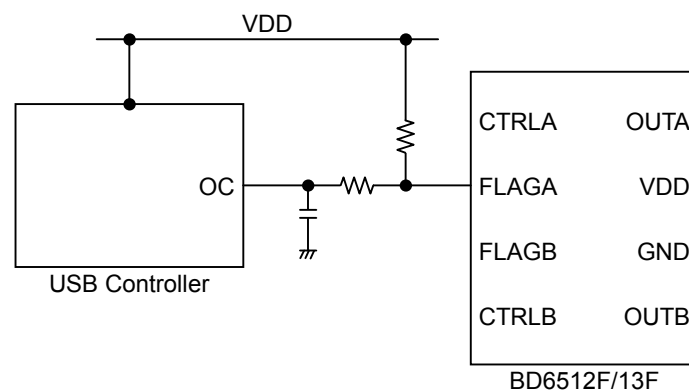


Fig.90 FLAG output RC filter

● Thermal derating characteristic
(SOP8, SOP-J8)

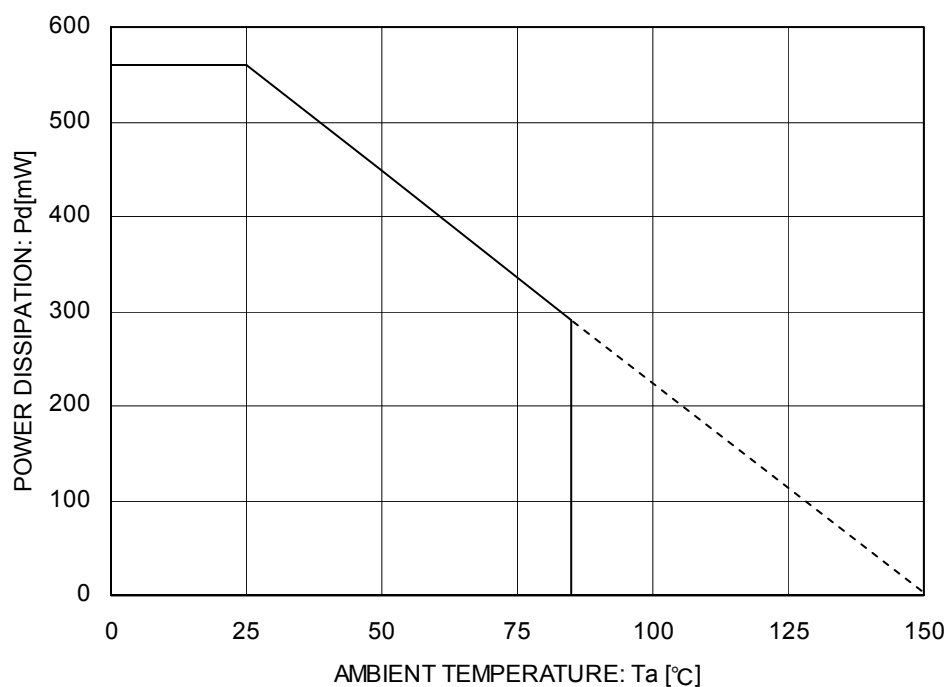


Fig.92 Power dissipation curve

● Cautions on use

(1) Absolute Maximum Ratings

An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down devices, thus making impossible to identify breaking mode such as a short circuit or an open circuit. If any special mode exceeding the absolute maximum ratings is assumed, consideration should be given to take physical safety measures including the use of fuses, etc.

(2) Operating conditions

These conditions represent a range within which characteristics can be provided approximately as expected. The electrical characteristics are guaranteed under the conditions of each parameter.

(3) Reverse connection of power supply connector

The reverse connection of power supply connector can break down ICs. Take protective measures against the breakdown due to the reverse connection, such as mounting an external diode between the power supply and the IC's power supply terminal.

(4) Power supply line

Design PCB pattern to provide low impedance for the wiring between the power supply and the GND lines. In this regard, for the digital block power supply and the analog block power supply, even though these power supplies has the same level of potential, separate the power supply pattern for the digital block from that for the analog block, thus suppressing the diffraction of digital noises to the analog block power supply resulting from impedance common to the wiring patterns. For the GND line, give consideration to design the patterns in a similar manner.

Furthermore, for all power supply terminals to ICs, mount a capacitor between the power supply and the GND terminal. At the same time, in order to use an electrolytic capacitor, thoroughly check to be sure the characteristics of the capacitor to be used present no problem including the occurrence of capacity dropout at a low temperature, thus determining the constant.

(5) GND voltage

Make setting of the potential of the GND terminal so that it will be maintained at the minimum in any operating state. Furthermore, check to be sure no terminals are at a potential lower than the GND voltage including an actual electric transient.

(6) Short circuit between terminals and erroneous mounting

In order to mount ICs on a set PCB, pay thorough attention to the direction and offset of the ICs. Erroneous mounting can break down the ICs. Furthermore, if a short circuit occurs due to foreign matters entering between terminals or between the terminal and the power supply or the GND terminal, the ICs can break down.

(7) Operation in strong electromagnetic field

Be noted that using ICs in the strong electromagnetic field can malfunction them.

(8) Inspection with set PCB

On the inspection with the set PCB, if a capacitor is connected to a low-impedance IC terminal, the IC can suffer stress. Therefore, be sure to discharge from the set PCB by each process. Furthermore, in order to mount or dismount the set PCB to/from the jig for the inspection process, be sure to turn OFF the power supply and then mount the set PCB to the jig. After the completion of the inspection, be sure to turn OFF the power supply and then dismount it from the jig. In addition, for protection against static electricity, establish a ground for the assembly process and pay thorough attention to the transportation and the storage of the set PCB.

(9) Input terminals

In terms of the construction of IC, parasitic elements are inevitably formed in relation to potential. The operation of the parasitic element can cause interference with circuit operation, thus resulting in a malfunction and then breakdown of the input terminal. Therefore, pay thorough attention not to handle the input terminals, such as to apply to the input terminals a voltage lower than the GND respectively, so that any parasitic element will operate. Furthermore, do not apply a voltage to the input terminals when no power supply voltage is applied to the IC. In addition, even if the power supply voltage is applied, apply to the input terminals a voltage lower than the power supply voltage or within the guaranteed value of electrical characteristics.

(10) Ground wiring pattern

If small-signal GND and large-current GND are provided, It will be recommended to separate the large-current GND pattern from the small-signal GND pattern and establish a single ground at the reference point of the set PCB so that resistance to the wiring pattern and voltage fluctuations due to a large current will cause no fluctuations in voltages of the small-signal GND. Pay attention not to cause fluctuations in the GND wiring pattern of external parts as well.

(11) External capacitor

In order to use a ceramic capacitor as the external capacitor, determine the constant with consideration given to a degradation in the nominal capacitance due to DC bias and changes in the capacitance due to temperature, etc.


(12) Thermal shutdown circuit (TSD)

When junction temperatures become 135°C (typ) or higher, the thermal shutdown circuit operates and turns a switch OFF. The thermal shutdown circuit, which is aimed at isolating the LSI from thermal runaway as much as possible, is not aimed at the protection or guarantee of the LSI. Therefore, do not continuously use the LSI with this circuit operating or use the LSI assuming its operation.

(13) Thermal design

Perform thermal design in which there are adequate margins by taking into account the power dissipation (Pd) in actual states of use.

●Order type name selection

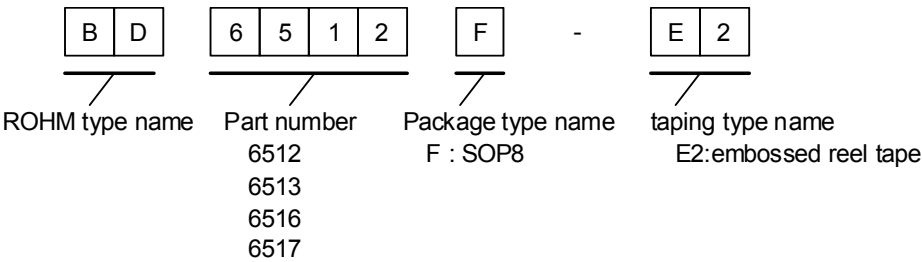

B

D

ROHM type name

2

0

4

2

A

Part number

2042

2052

F

J

Package type name

FJ : SOP-J8

E


2

taping type name

E2:embossed reel tape

SOP8


<Dimension>



(Unit:mm)

<Tape and Reel information>


Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

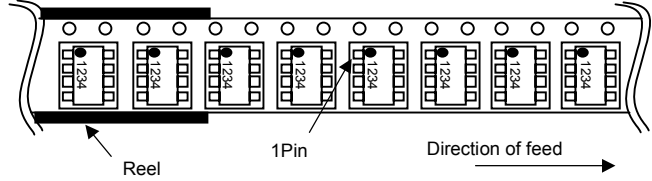

※When you order , please order in times the amount of package quantity.

SOP-J8


<Dimension>



(Unit:mm)

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

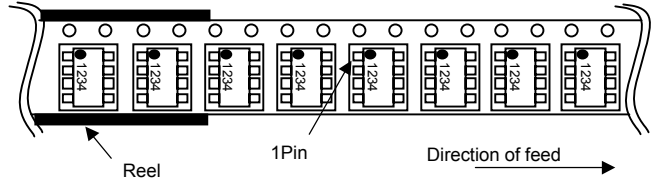

※When you order , please order in times the amount of package quantity.

- The contents described herein are correct as of May, 2008
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO.,LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD. is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Excellence in Electronics



ROHM CO., LTD.

21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: +81-75-311-2121 FAX: +81-75-315-0172
URL <http://www.rohm.com>

Published by
LSI Business Promotion Dept.

Contact us for further information about the products.

San Diego
Atlanta
Boston
Chicago
Dallas
Denver
Detroit
Nashville
Mexico
Düsseldorf
Munich
Stuttgart
France
United Kingdom
Denmark
Barcelona
Hungary
Poland
Russia
Seoul
Masan
Dalian
Beijing
Tianjin

TEL: +1-858-625-3630
TEL: +1-770-754-5972
TEL: +1-978-371-0382
TEL: +1-847-368-1006
TEL: +1-469-287-5366
TEL: +1-303-708-0908
TEL: +1-248-348-9920
TEL: +1-615-620-6700
TEL: +52-33-3123-2001
TEL: +49-2154-9210
TEL: +49-8161-48310
TEL: +49-711-72723710
TEL: +33-1-5697-3060
TEL: +44-1-908-306700
TEL: +45-3694-4739
TEL: +34-9375-24320
TEL: +36-1-4719338
TEL: +48-22-5757213
TEL: +7-95-980-6755
TEL: +82-2-8182-700
TEL: +82-55-240-6234
TEL: +86-411-8230-8549
TEL: +86-10-8525-2483
TEL: +86-22-23029181

FAX: +1-858-625-3670
FAX: +1-770-754-0691
FAX: +1-928-438-7164
FAX: +1-847-368-1008
FAX: +1-469-362-7973
FAX: +1-303-708-0858
FAX: +1-248-348-9942
FAX: +1-615-620-6702
FAX: +52-33-3123-2002
FAX: +49-2154-921400
FAX: +49-8161-483120
FAX: +49-711-72723720
FAX: +33-1-5697-3080
FAX: +44-1-908-235788
FAX: +45-3694-4789
FAX: +34-9375-24410
FAX: +36-1-4719339
FAX: +48-22-5757001
FAX: +7-95-937-8290
FAX: +82-2-8182-715
FAX: +82-55-240-6236
FAX: +86-411-8230-8537
FAX: +86-10-8525-2489
FAX: +86-22-23029183

Shanghai
Hangzhou
Nanjing
Ningbo
Qingdao
Suzhou
Wuxi
Shenzhen
Dongguan
Fuzhou
Guangzhou
Huizhou
Xiamen
Zhuhai
Hong Kong
Taipei
Kaohsiung
Singapore
Philippines
Thailand
Kuala Lumpur
Penang
Kyoto
Yokohama

TEL: +86-21-6279-2727
TEL: +86-571-87658072
TEL: +86-25-8689-0015
TEL: +86-574-87654201
TEL: +86-532-5779-312
TEL: +86-512-6807-1300
TEL: +86-510-82702693
TEL: +86-755-8307-3008
TEL: +86-769-8393-3320
TEL: +86-591-8801-8698
TEL: +86-20-8364-9796
TEL: +86-752-205-1054
TEL: +86-592-238-5705
TEL: +86-756-3232-480
TEL: +852-2-740-6262
TEL: +886-2-2500-6956
TEL: +886-7-237-0881
TEL: +65-6332-2322
TEL: +63-2-807-6872
TEL: +66-2-254-4890
TEL: +60-3-7958-8355
TEL: +60-4-2286453
TEL: +81-75-365-1218
TEL: +81-45-476-2290

FAX: +86-21-6247-2066
FAX: +86-571-87658071
FAX: +86-25-8689-0393
FAX: +86-574-87654208
FAX: +86-532-5779-653
FAX: +86-512-6807-2300
FAX: +86-510-82702992
FAX: +86-755-8307-3003
FAX: +86-769-8398-4140
FAX: +86-591-8801-8690
FAX: +86-20-8364-9707
FAX: +86-752-205-1059
FAX: +86-592-239-8380
FAX: +86-756-3232-460
FAX: +852-2-375-8971
FAX: +886-2-2503-2869
FAX: +886-7-238-7332
FAX: +65-6332-5662
FAX: +63-2-809-1422
FAX: +66-2-256-6334
FAX: +60-3-7958-8377
FAX: +60-4-2286452
FAX: +81-75-365-1228
FAX: +81-45-476-2295

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM CO.,LTD.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp