




# Curtis

We Build Confidence!

# RFI Power Line Filters

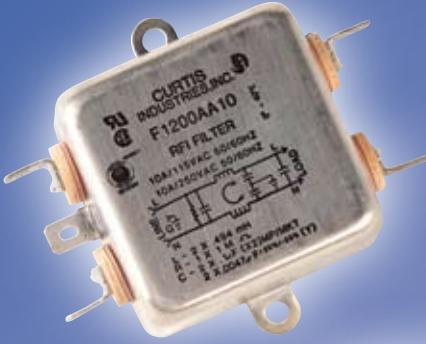




# Curtis Industries

A Division of Powers Holdings, Inc.

Curtis Industries is recognized as a leader in RFI Power Line Filters. We focus on five key areas to insure high quality filters and total customer satisfaction using the latest technology. These key areas include Customer Satisfaction, Design Engineering, Manufacturing, Quality, and On-Time Delivery.



**Customer Satisfaction** is carried out throughout Curtis. Customer interface with our friendly and knowledgeable Customer Service Representative where all the information needed for order entry, processing, shipping, pricing, and order expediting are immediately available electronically.

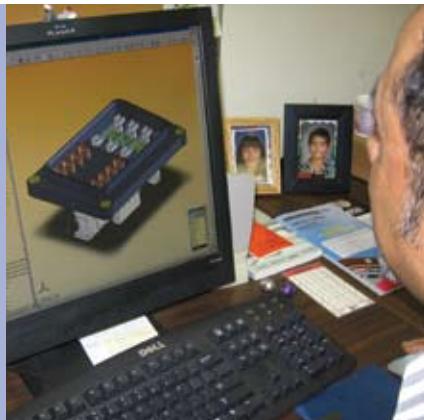

**Design Engineering** is able to create new designs to solve our OEM customer's requirements. Using the Solid Works modeling technology enables our engineers to design the optimum filter or custom control package.



**Manufacturing** uses proprietary techniques with semi and full automation to build in quality and reduce thru-put. We deliver 99.9% reliable product to meet our customer's quality objectives.




**Quality** is designed, built in and verified on every filter to the following.

- Hi Pot – DC Line to Line
- Hi Pot – AC Line to Ground
- Current Leakage
- Ground Continuity
- Capacitance Line to Line
- Capacitance Line to Ground
- Inductance Line
- Inductance Ground
- Cross Wiring



**On-Time Delivery** is a focus for everyone at Curtis which has resulted in an on-time delivery greater than 98% on time.

# Contents

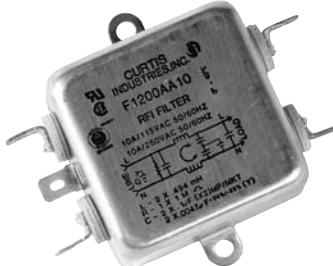

## SINGLE PHASE FILTERS

### General Purpose

F1100/F1150/F1199	4
F1200/F1250/F1299	7
F1300/F1350/F1399	11
F1900	15

### High Performance

F1400	16
F1500	18
F1600	20
F1700/F1799	22
F1760/F1770/F1780	24
F2800	26

### Wide Band

F5100	28
F5200	30
F5500	32
F5600	34
F5700	36
F5900	38
Single Phase Filter Cutouts	40

## POWER ENTRY MODULES

### General Purpose Filtered Modules

F2199/F2200	44
F2300	45
F2400/F2500	46
F2600	48
F2700	50

### Combination

PE7/PE8/PE9	52
PE1	56
Power Entry Module Cutouts	58

## THREE-PHASE FILTERS

F3480/F3600	60
-------------	----

## DC FILTERS

FD Series	64
-----------	----

### General Purpose

FD00	67
FD02	68

### High Performance

FD1	69
FD2	70
FD3	70

## MEDICAL FILTERS

### General Purpose Filtered Modules

F3099	72
F3000/3100/F3200/F3400/F3500	73
F3300	74

### Combination

PM7/PM8/PM9	76
PM1	80
Power Entry Module Cutouts	82

## TECHNICAL CONSIDERATIONS

Understanding Terminology	84
Technical Considerations	86
Conducted Emissions Testing	88
Custom Filter Capabilities	89

# Curtis Industries Filter Selection Guide

Filter Series	PACKAGE/TERMINATION										Catalog Page Number			
	PERFORMANCE RELATIVE ATTENUATION		MAXIMUM LEAKAGE CURRENT		Wire	Q.C.	I.E.C.	Fused I.E.C.	Volt Select	Switch	P.C. Term	Screw	Solder Term.	
	Common Mode	Differential Mode	mA @115VAC	mA @250VAC										
SINGLE PHASE	<b>F1100/1199</b>	••	••	0.5	1.0	•	•				•	•	•	4
	<b>F1150</b>	•	•	0.25	0.40	•	•					•	•	4
	<b>F1200/1299</b>	••	••	0.5	1.0	•	•	•				•	•	7
	<b>F1250</b>	•	••	0.25	0.40	•	•					•	•	7
	<b>F1300/1399</b>	••••	••	0.5	1.0	•	•	•			•	•	•	11
	<b>F1350</b>	•••	••	0.25	0.40	•	•	•			•	•	•	11
	<b>F1900</b>	•	•	0.25	0.40		•					•	•	15
	<b>F1400</b>	•••••	•••••	0.25	0.40	•	•	•				•	•	16
	<b>F1500</b>	•••••	•••••	0.25	0.40		•	•	•			•	•	18
	<b>F1600</b>	•••••	•••••	0.25	0.40		•	•	•		•	•	•	20
	<b>F1700/1799</b>	••	•••••	0.5	1.0	•	•	•				•	•	22
	<b>F1760/1700/1780</b>	•••••	•••••	0.5	1.0	•	•	•				•	•	24
	<b>F2800</b>	•••••	•••••	0.25	0.50	•	•					•	•	26
	<b>F5100</b>	••	••	0.25	0.50			•				•	•	28
	<b>F5200</b>	••	••	0.25	0.50				•			•	•	30
	<b>F5500</b>	•••••	•••••	0.25	0.50			•				•	•	32
	<b>F5600</b>	•••••	•••••	0.50	1.20			•				•	•	34
	<b>F5700</b>	•••••	•••••	0.50	1.20			•				•	•	36
	<b>F5900</b>	•••••	•••••	0.50	1.20			•				•	•	38
THREE-PHASE	<b>F2199/2200</b>	•	•	0.25	0.40		•	•				•	•	44
	<b>F2300 F2300</b>	•••	••	0.25	0.40		•	•				•	•	45
	<b>F2400/2500</b>	•	•	0.25	0.40		•	•				•	•	46
	<b>F2600</b>	•	•	0.25	0.40		•	•	•	•	•	•	•	48
	<b>F2700</b>	•••••	•••••	0.25	0.40	•	•	•	•	•		•	•	50
	<b>PE7</b>	•	•	0.25	0.40		•		•	•			•	52
	<b>PE8</b>	•	•	0.25	0.40		•		•	•			•	52
	<b>PE9</b>	•	•	0.25	0.40		•		•	•			•	52
	<b>PE1</b>	••	••	0.25	0.40		•		•	•			•	56
	<b>F3480/F3600</b>	•••	•••				•					•	•	60
DC FILTERS	<b>FD00</b>	(See Section on DC filters for more information)										67		
	<b>FD02</b>											68		
	<b>FD1</b>											69		
	<b>FD2</b>											70		
	<b>FD3</b>											70		
MEDICAL	<b>F3099</b>	•	••	0.002	0.005	•	•					•	•	72
	<b>F3000/3100/3200/3400/3500</b>	•	••	0.002	0.005		•	•				•	•	73
	<b>F3300</b>	•	•	0.015	0.025		•	•	•	•	•	•	•	74
	<b>PM7</b>	•	•	0.002	0.005		•		•	•			•	76
	<b>PM8</b>	•	•	0.002	0.005		•		•	•			•	76
	<b>PM9</b>	•	•	0.002	0.005		•		•	•			•	76
	<b>PM1</b>	••	••	0.002	0.005		•		•	•			•	80




## **SINGLE PHASE FILTERS**

*General Performance*

*High Performance*

*Wide Band*

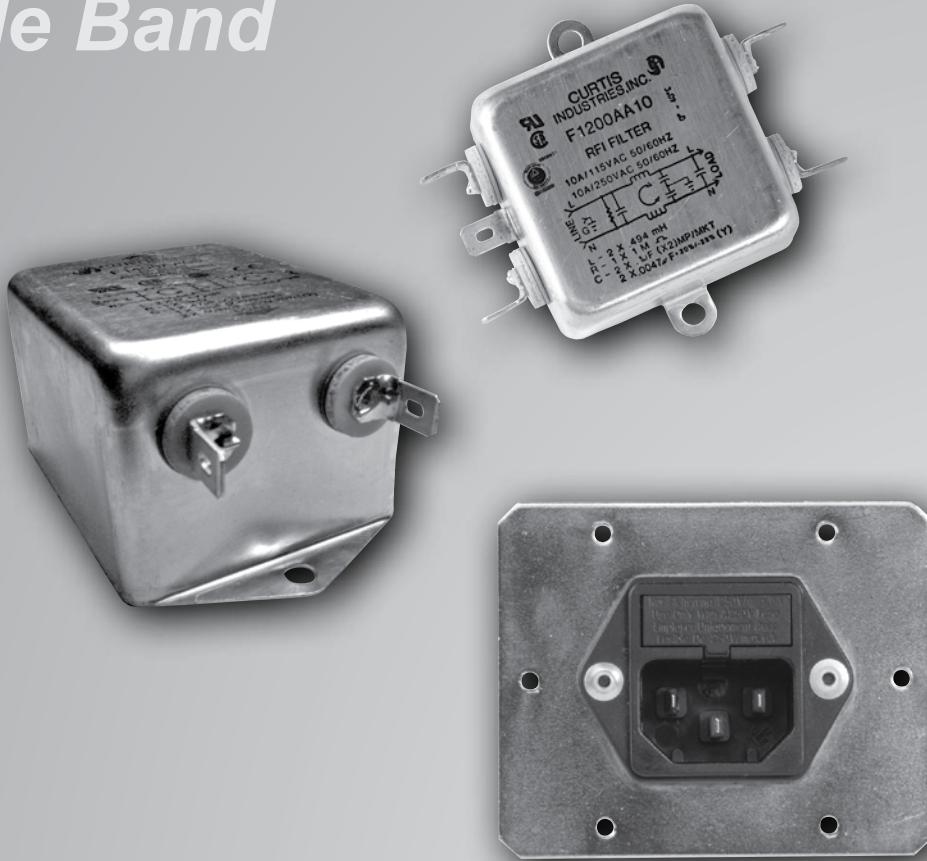


*Curtis Industries*

A Division of Powers Holdings, Inc.

# F1100/F1150F/F1199 RFI Filters

General Purpose


SINGLE PHASE FILTERS

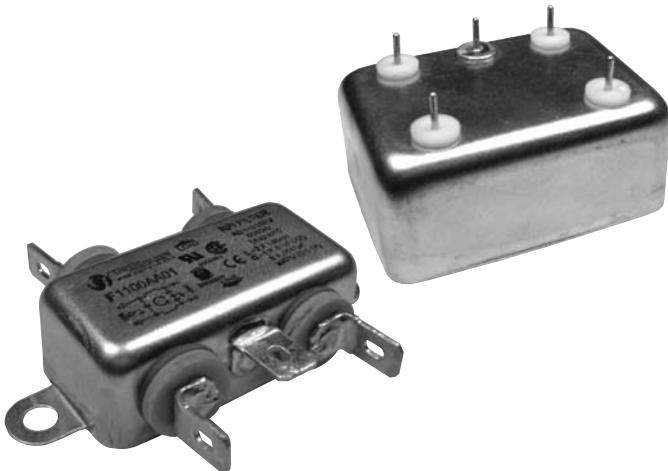

## Features:

- Most Economical Design
- Designed for General Purpose, Common Mode Applications
- Available in Standard (F1100) and Low-Leakage (F1150) (F1160) (F1170) (F1180) (F1190) (F1199) Models

## F1100/F1150/F1199 Simplified Schematic

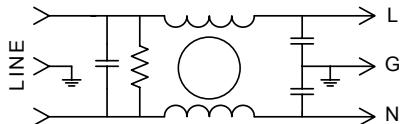

Nominal Current Rating 115 VAC	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
1A	F1100AA01 F1100BB01	QC/QC Wire/Wire	Common Differential	20	35	43	52 55	55 65	50 50
	F1150AA01 F1150BB01	QC/QC Wire/Wire	Common Differential	20	30	37	50 55	50 65	50 50
	F1199AA01	QC/QC	Common Differential	32 5	45 14	45 23	43 47	43 50	40 45
2A	F1199AA02 F1199BB02	QC/QC Wire/Wire	Common Differential	24 5	35 13	43 16	45 45	45 50	40 45
3A	F1100AA03 F1100BB03 F1100PP03	QC/QC Wire/Wire PC/PC	Common Differential	20	35	43	52 55	55 64	50 46
	F1150AA03 F1150BB03	QC/QC Wire/Wire	Common Differential	20	30	37	50 55	50 64	50 46
	F1199AA03 F1199BB03	QC/QC Wire/Wire	Common Differential	20 5	30 12	38 14	48 38	48 44	44 42
6A	F1100AA06 F1100BB06	QC/QC Wire/Wire	Common Differential	10	22	30	46 51	50 57	45 49
	F1150AA06 F1150BB06	QC/QC Wire/Wire	Common Differential	10	20	27	45 51	45 57	45 49
	F1199AA06 F1199BB06	QC/QC Wire/Wire	Common Differential	9 5	20 12	28 14	42 33	50 42	47 42
10A	F1100AA10 F1100BB10	QC/QC Wire/Wire	Common Differential	10	22	30	46 27	50 47	45 50
	F1150AA10 F1150BB10	QC/QC Wire/Wire	Common Differential	10	20	27	45 27	45 47	45 50
	F1199AA10 F1199BB10 F1199DD10	QC/QC Wire/Wire Screw/Screw	Common Differential	9 5	20 12	25 14	38 33	42 42	40 42
20A	F1100AA20 F1100DD20	QC/QC Screw/Screw	Common Differential	8	18	22	36 22	42 46	45 60
	F1150AA20 F1150DD20	QC/QC Screw/Screw	Common Differential	8	15	20	32 22	38 46	45 60
	F1199AA20 F1199DD20	QC/QC Screw/Screw	Common Differential	10 5	20 12	28 15	35 30	38 40	40 40
30A	F1199DD30	Screw/Screw	Common Differential	13 5	23 12	30 15	35 30	38 40	40 40

NOTE: Other combinations of terminals may be specified on special order.



## Specifications:

Rated Voltage: 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
	1A	1A
	2A	1.5A
	3A	2.5A
	6A	4A
	10A	6A
	20A	10A
	30A	15A

Current Overload: 6X for 8 seconds

Hi-Pot Test (1 min):	F1100/F1150	F1199
Line to Ground:	1500VAC	1500VAC
Line to Line:	1768VDC	1450VDC

Insulation Resistance:  $9 \times 10^9 \Omega$  at 100VDC

Ambient Temperature: 40°C Max. at rated current

Humidity Range: 0% to 95% R.H.

Termination:

A: QC – Quick Connect      D: Screw  
B: Wire                              P: PCB Mount

Maximum Leakage Current:


Each Line to Ground	F1100	F1150	F1199
115VAC, 60Hz:	0.40mA	0.25mA	0.25mA
250VAC, 50Hz:	.75mA	0.40mA	0.45mA

Agency Approvals:



F1100	F1100	F1100
F1150	F1500	Except 20Amp
F1199	F1199	F1199


## F1100DD/F1150DD (20Amp Only) Dimensions

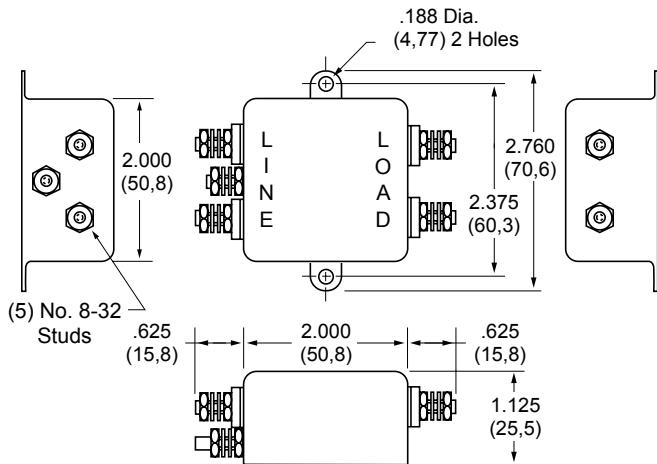

## F1100AA/F1150AA

(1, 3, 6, 10 and 20Amp) Dimensions


Amps	A	B	C	D	E
1A	2.500 (63,5)	1.750 (44,5)	.625 (15,8)	2.125 (53,9)	1.425 (36,2)
3A	2.500 (63,5)	1.750 (44,5)	.750 (19,1)	2.125 (53,9)	1.8 (45,8)
6A	2.500 (63,5)	1.750 (44,5)	.750 (19,1)	2.125 (53,9)	1.8 (45,8)
10A	2.500 (63,5)	1.750 (44,5)	1.125 (28,5)	2.125 (53,9)	1.8 (45,8)
20A	2.760 (70,6)	2.000 (60,8)	1.125 (28,5)	2.375 (60,3)	2.550 (64,8)

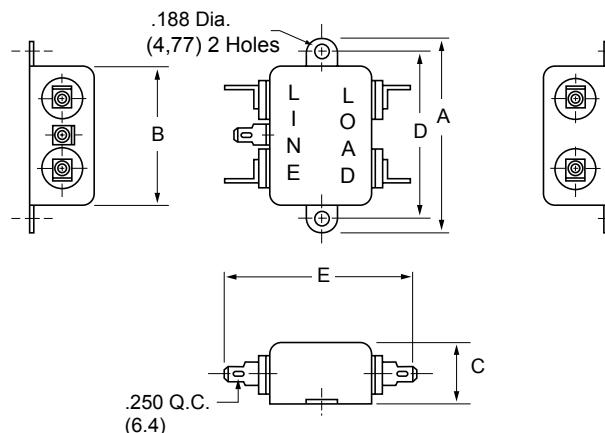

## F1100BB/FB1150BB

(1, 3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
1A	2.500 (63,5)	1.750 (44,5)	.625 (15,8)	2.125 (53,9)	.875 (22,2)
3A	2.500 (63,5)	1.750 (44,5)	.750 (19,1)	2.125 (53,9)	1.250 (31,8)
6A	2.500 (63,5)	1.750 (44,5)	.750 (19,1)	2.125 (53,9)	1.250 (31,8)
10A	2.500 (63,5)	1.750 (44,5)	1.125 (28,5)	2.125 (53,9)	1.250 (31,8)

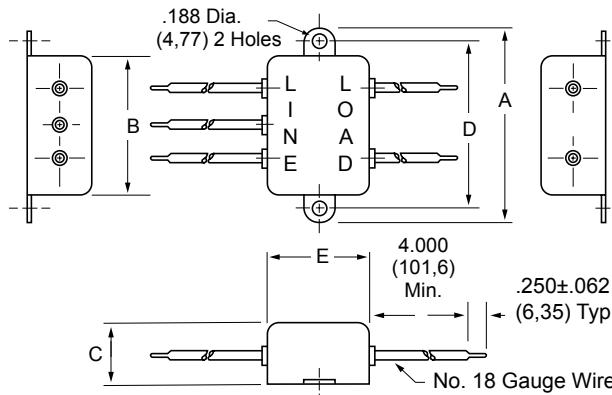

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# F1100/F1150/F1199 RFI Filters (continued)

## General Purpose

## SINGLE PHASE FILTERS

### F1199AA (1, 2, 3, 6, 10 and 20Amp) Dimensions


Amps	A	B	C	D	E
1A	2.53 (64,3)	1.82 (46,2)	0.66 (16,8)	2.126 (54,0)	2.25 (57,2)
2A	2.53 (64,3)	1.82 (46,2)	0.66 (16,8)	2.126 (54,0)	2.25 (57,2)
3A	2.53 (64,3)	1.82 (46,2)	0.78 (19,8)	2.126 (54,0)	2.61 (66,3)
6A	2.53 (64,3)	1.82 (46,2)	0.78 (19,8)	2.126 (54,0)	2.61 (66,3)
10A	2.53 (64,3)	1.82 (46,2)	1.16 (29,5)	2.126 (54,0)	2.61 (66,3)
20A	2.81 (71,4)	2.07 (52,6)	1.16 (29,5)	2.375 (60,33)	3.36 (85,3)

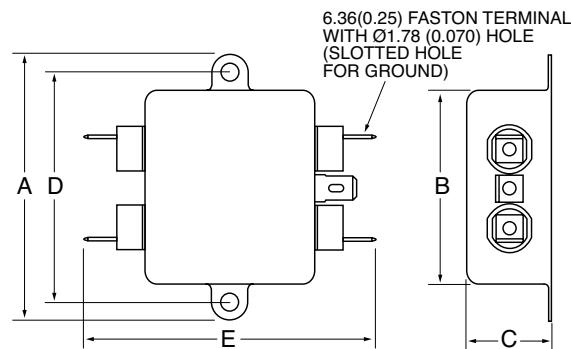

### F1199BB (2, 3, 6 and 10Amp) Dimensions


### F1199BB (2, 3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
2A	2.53 (64,3)	1.82 (46,2)	0.66 (16,8)	2.126 (54,0)	0.96 (24,4)
3A	2.53 (64,3)	1.82 (46,2)	0.78 (19,8)	2.126 (54,0)	1.32 (33,5)
6A	2.53 (64,3)	1.82 (46,2)	0.78 (19,8)	2.126 (54,0)	1.32 (33,5)
10A	2.53 (64,3)	1.82 (46,2)	1.16 (29,5)	2.126 (54,0)	1.32 (33,5)

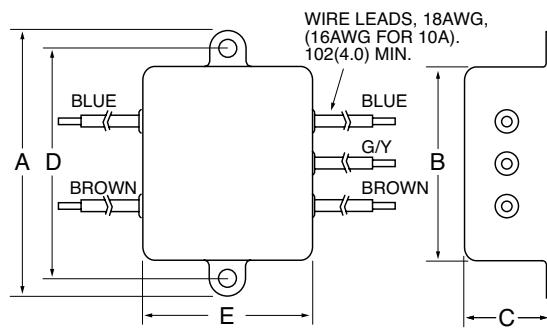


### F1199DD (10, 20 and 30Amp) Dimensions

Amps	A	B	C	D	E
10A	2.53 (64,3)	1.82 (46,2)	1.16 (29,5)	2.126 (54,0)	2.72 (69,1)
20A	2.81 (71,4)	2.07 (52,6)	1.16 (29,5)	2.375 (60,33)	3.46 (87,9)
30A	4.20 (106,7)	3.38 (85,9)	1.53 (38,9)	3.75 (95,25)	5.34 (135,6)

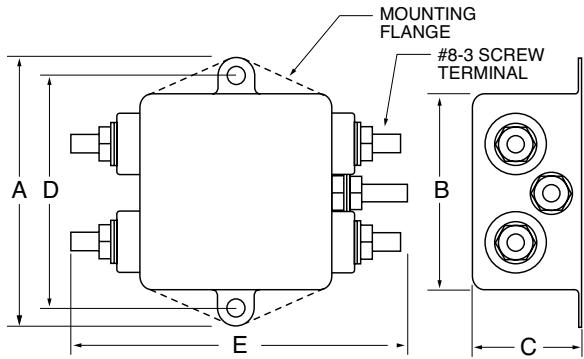

### F1100PP Recommended PC Mounting

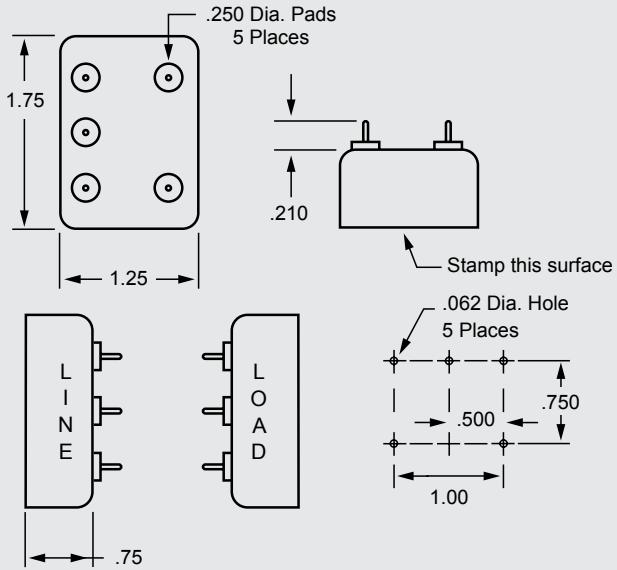

# F1200/F1250/F1299 RFI Filters

## Features:

- Designed for General Purpose Common Mode and Differential Mode Applications
- Higher Line-to-Line Capacitance for Protection from Pulsed, Intermittent, or Continuous RFI

- Available in Standard (F1200) and Low-Leakage (F1250) (F1260) (F1270) (F1280) (F1299) Models
- Available with Integral IEC Connector up to 10Amps



General Purpose

**SINGLE PHASE FILTERS**

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
1A	F1200AA01	QC/QC	Common	20	35	43	52	55	50
	F1200BB01	Wire/Wire	Differential	4	38	59	66	62	54
2A	F1250AA01	QC/QC	Common	20	30	37	50	50	50
	F1250BB01	Wire/Wire	Differential	4	38	59	66	62	54
3A	F1299AA02	QC/QC	Common	24	35	43	45	45	40
	F1299BB02	Wire/Wire	Differential	6	35	50	55	50	45
	F1200AA03	QC/QC	Common	20	35	43	52	55	50
3A	F1200BB03	Wire/Wire	Differential	4	38	59	70	64	59
	F1200CA03	IEC/QC							
	F1250AA03	QC/QC	Common	20	30	37	50	50	50
3A	F1250BB03	Wire/Wire	Differential	4	38	59	70	64	59
	F1250CA03	IEC/QC							
	F1299AA03	QC/QC	Common	26	37	45	45	45	40
3A	F1299BB03	Wire/Wire	Differential	6	40	55	55	50	45
	F1299CA03	IEC/QC							
6A	F1200AA06	QC/QC	Common	10	22	30	46	50	45
	F1200BB06	Wire/Wire	Differential	9	25	48	70	70	62
	F1200CA06	IEC/QC							
6A	F1250AA06	QC/QC	Common	10	20	27	45	45	45
	F1250BB06	Wire/Wire	Differential	9	25	48	70	70	62
	F1250CA06	IEC/QC							
6A	F1299AA06	QC/QC	Common	20	31	40	45	45	40
	F1299BB06	Wire/Wire	Differential	6	35	50	55	50	45
	F1299CA06	IEC/QC							
10A	F1200AA10	QC/QC	Common	10	22	30	46	50	45
	F1200BB10	Wire/Wire	Differential	10	16	43	70	70	66
	F1200CA10	IEC/QC							
10A	F1250AA10	QC/QC	Common	10	20	27	45	45	45
	F1250BB10	Wire/Wire	Differential	10	16	43	70	70	66
	F1250CA10	IEC/QC							
10A	F1299AA10	QC/QC	Common	9	20	25	38	42	40
	F1299BB10	Wire/Wire	Differential	14	14	38	50	48	45
	F1299CA10	IEC/QC							
10A	F1299DD10	Screw/Screw							
	F1200AA20	QC/QC	Common	10	22	30	42	47	40
	F1200DD20	Screw/Screw	Differential	9	19	44	70	70	70
20A	F1250AA20	QC/QC	Common	10	20	25	38	40	40
	F1250DD20	Screw/Screw	Differential	9	19	44	70	70	70
	F1299AA20	QC/QC	Common	10	20	28	35	38	40
20A	F1299DD20	Screw/Screw	Differential	14	14	38	50	48	45
	F1200DD30	Screw/Screw	Common	7	15	20	34	42	40
	F1299DD30	Screw/Screw	Differential	11	13	44	70	60	57
30A	F1200DD30	Screw/Screw	Common	12	23	30	35	38	40
	F1299DD30	Screw/Screw	Differential	15	40	55	55	55	50

NOTE: Other combinations of terminals may be specified on special order.

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F1200/F1250/F1299 RFI Filters (continued)

## Specifications:

Rated Voltage: 250VAC Maximum - 50/60 Hz

### Rated Current:

115VAC	1A	2A	3A	6A	10A	20A	30A
250VAC	1A	1.5A	2.5A	4A	6A	10A	15A

Current Overload: 6X for 8 seconds

Hi-Pot Test (1 min): **F1200 Series** **F1299 Series**

Line to Ground:	1500VAC	1500VAC
Line to Line:	1768VDC	1450VDC

Insulation Resistance:  $9 \times 10^9 \Omega$  at 100VDC

Ambient Temperature: 40°C Max at rated current

Humidity Range: 0% to 95% R.H.

### Termination:

A: QC – Quick Connect	C: IEC Receptacle
B: Wire	D: Screw

### Maximum Leakage Current:

Each Line to Ground	<b>F1200</b>	<b>F1250</b>	<b>F1299</b>	<b>F1260</b>	<b>F1270</b>	<b>F1280</b>	<b>F1299</b>
115VAC, 60Hz:	0.40mA	0.25mA	.15mA	.25mA	.002mA	.015mA	.030mA
250VAC, 50Hz:	.75mA	.40mA	.25mA	.45mA	.005mA	.025mA	.050mA

### Agency Approvals

**F1200:**



Except 30Amp


### Agency Approvals

**F1299:**




## F1200AA/F1250AA (1, 3, 6, 10 and 20Amp) Dimensions


Amps	A	B	C	D	E	F
1A	2.750 (69.9)	2.00 (50.8)	.875 (22.2)	2.375 (60.3)	1.750 (44.5)	.550 (14.0)
3A	2.750 (69.9)	2.00 (50.8)	1.125 (28.5)	2.375 (60.3)	1.750 (44.5)	.550 (14.0)
6A	2.750 (69.9)	2.00 (50.8)	1.125 (28.5)	2.375 (60.3)	1.750 (44.5)	.550 (14.0)
10A	2.750 (69.9)	2.00 (50.8)	1.125 (28.5)	2.375 (60.3)	2.000 (50.8)	.550 (14.0)
20A	3.310 (84.1)	2.50 (63.5)	1.500 (38.1)	2.940 (74.7)	2.000 (50.8)	.550 (14.0)

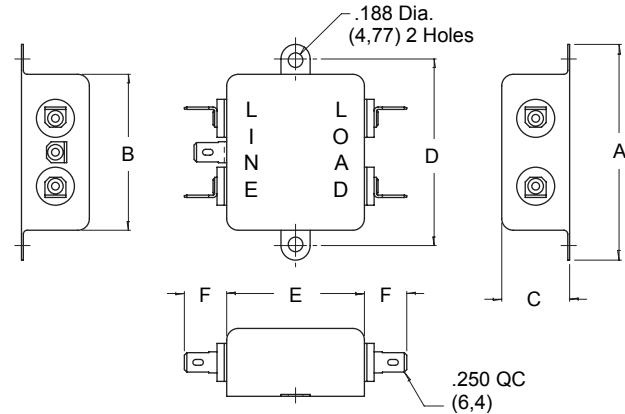

## F1200BB/FB1250BB (1, 3, 6 and 10Amp) Dimensions


Amps	A	B	C	D	E
1A	2.750 (69.9)	2.00 (50.8)	.875 (22.2)	2.375 (60.3)	1.750 (44.5)
3A	2.750 (69.9)	2.00 (50.8)	1.125 (28.5)	2.375 (60.3)	1.750 (44.5)
6A	2.750 (69.9)	2.00 (50.8)	1.125 (28.5)	2.375 (60.3)	1.750 (44.5)
10A	2.750 (69.9)	2.00 (50.8)	1.125 (28.5)	2.375 (60.3)	2.000 (50.8)

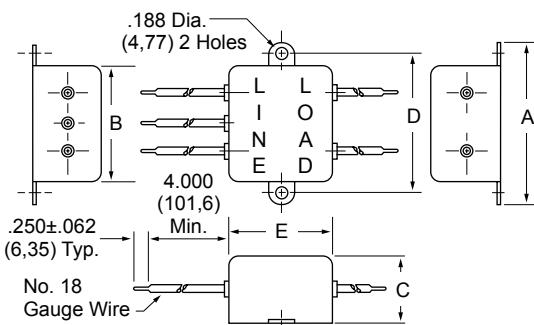


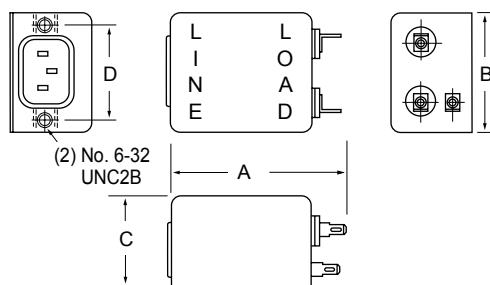
**F1200CA/F1250CA** (3, 6, and 10Amp) Dimensions

Refer to Page  
36 for Standard  
Mounting Cutouts

Amps	A	B	C	D
3A	2.55 (64.8)	2.000 (50.8)	1.50 (38.1)	1.575 (40.0)
6A	3.05 (77.5)	2.000 (50.8)	1.500 (38.1)	1.575 (40.0)
10A	3.05 (77.5)	2.000 (50.8)	1.500 (38.1)	1.575 (40.0)

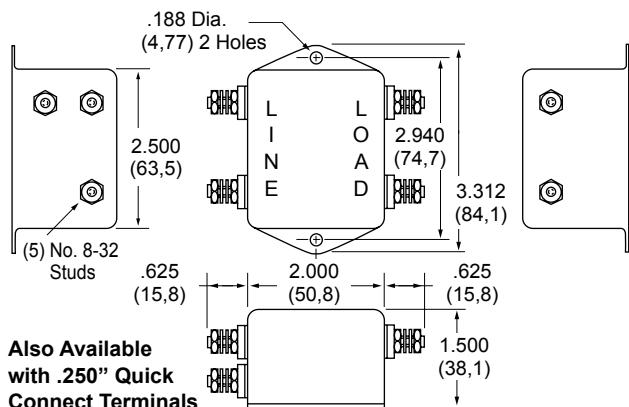**F1200DD/F1250DD**  
(20Amp Only) Dimensions**F1299AA** (2, 3, 6, 10 and 20Amp) Dimensions

Amps	A	B	C	D	E
2A	2.81 (71.4)	2.07 (52.6)	0.91 (23.1)	2.375 (60.33)	3.10 (78.7)
3A	2.81 (71.4)	2.07 (52.6)	1.16 (29.5)	2.375 (60.33)	3.10 (78.7)
6A	2.81 (71.4)	2.07 (52.6)	1.16 (29.5)	2.375 (60.33)	3.10 (78.7)
10A	2.81 (71.4)	2.07 (52.6)	1.16 (29.5)	2.375 (60.33)	3.35 (85.1)
20A	3.35 (85.1)	2.56 (65.0)	1.53 (38.9)	2.938 (74.63)	3.35 (85.1)

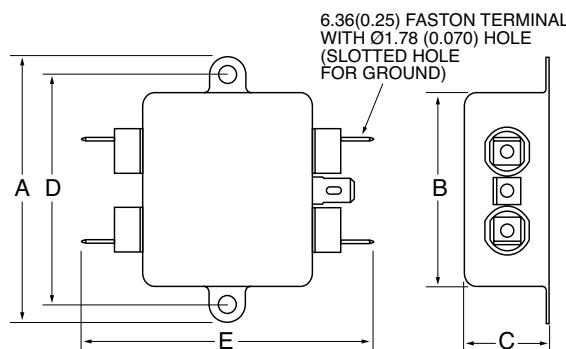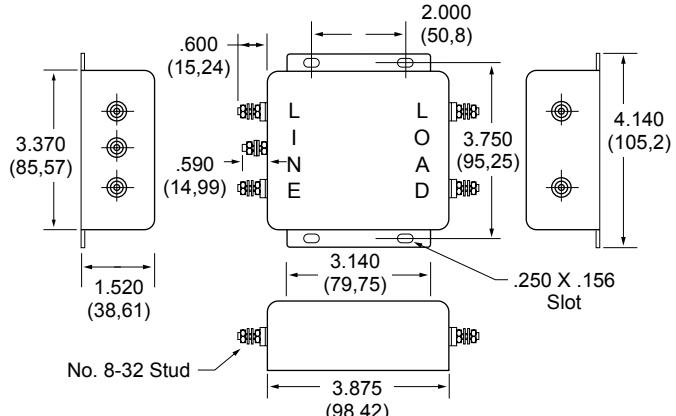**F1200DD30**  
(30Amp Only) Dimensions

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F1200/F1250/F1299 RFI Filters (continued)


## F1299BB (2, 3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
2A	2.81 (71,4)	2.07 (52,6)	0.91 (23,1)	2.375 (60,33)	1.81 (46,0)
3A	2.81 (71,4)	2.07 (52,6)	1.16 (29,5)	2.375 (60,33)	3.10 (78,7)
6A	2.81 (71,4)	2.07 (52,6)	1.16 (29,5)	2.375 (60,33)	3.10 (78,7)
10A	2.81 (71,4)	2.07 (52,6)	1.16 (29,5)	2.375 (60,33)	2.07 (52,6)

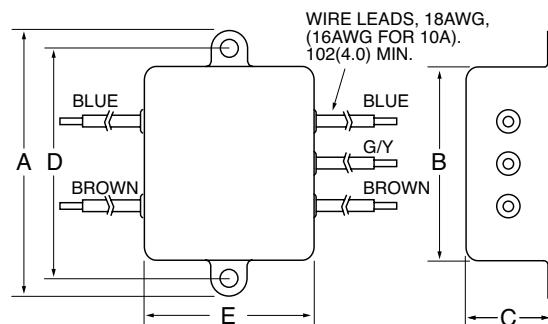




## F1299CA (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D
3A	3.21 (81,5)	2.25 (57,2)	1.28 (32,5)	1.575 (40,0)
6A	3.21 (81,5)	2.25 (57,2)	1.28 (32,5)	1.575 (40,0)
10A	3.71 (94,2)	2.25 (57,2)	1.28 (32,5)	1.575 (40,0)

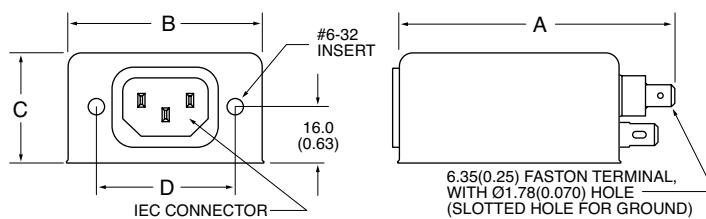

## F1299DD (10, 20 and 30Amp) Dimensions

Amps	A	B	C	D	E
10A	2.81 (71,40)	2.07 (52,6)	1.16 (29,5)	2.375 (60,33)	3.46 (87,9)
20A	3.35 (85,1)	2.56 (65,0)	1.53 (38,9)	2.938 (74,63)	3.46 (87,9)
30A	4.20 (106,7)	3.38 (85,9)	1.53 (38,9)	3.750 (95,25)	5.34 (135,6)

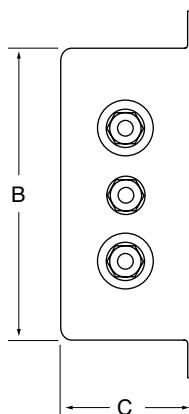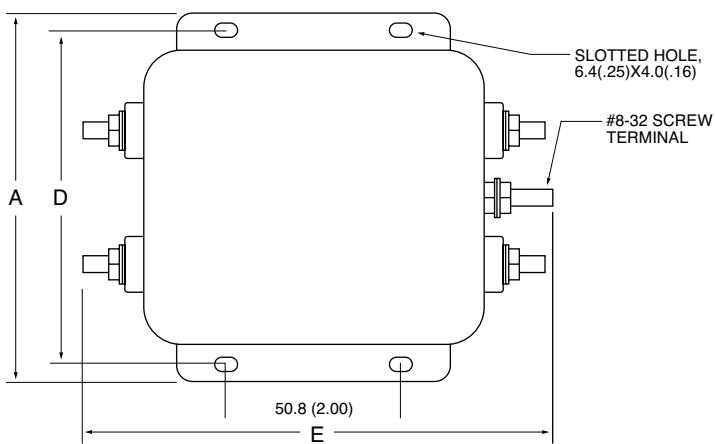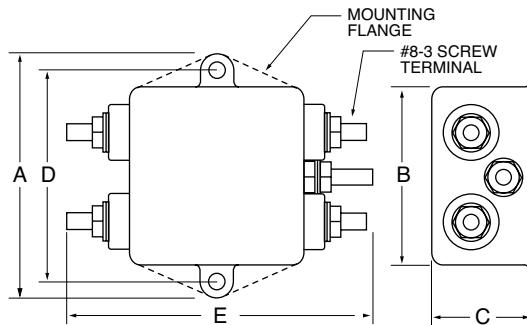

# F1300/F1350/F1399 RFI Filters

## Features:

- T Circuit Configuration—Designed for Motor, Capacitive and Other Low Impedance Loads
- Dual Coils — Higher Performance in Unknown RFI and Noise Susceptibility Applications
- Integral IEC Connector and PC Mounted Versions Now Available



Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
1A	F1300AA01	QC/QC	Common	40	65	65	65	65	65
	F1300BB01	Wire/Wire	Differential	2	57	69	70	70	60
	F1350AA01	QC/QC	Common	30	60	65	65	65	65
	F1350BB01	Wire/Wire	Differential	2	57	69	70	70	60
2A	F1399AA02	QC/QC	Common	40	65	65	65	65	40
	F1399BB02	Wire/Wire	Differential	5	45	70	65	60	50
3A	F1300AA03	QC/QC	Common	40	65	65	65	65	65
	F1300BB03	Wire/Wire	Differential	7	64	70	70	70	58
	F1300CA03	IEC/QC	Common						
	F1300CP03	IEC/PC	Differential						
6A	F1350AA03	QC/QC	Common	30	60	65	65	65	65
	F1350BB03	Wire/Wire	Differential	7	64	70	70	70	58
	F1350CA03	IEC/QC	Common						
	F1350CP03	IEC/PC	Differential						
10A	F1399AA03	QC/QC	Common	40	65	65	65	65	40
	F1399BB03	Wire/Wire	Differential	12	55	70	65	60	50
	F1399CA03	IEC/QC	Common						
	F1399CP03	IEC/PC	Differential						
15A	F1300AA15	QC/QC	Common	14	35	44	56	58	55
			Differential	15	10	45	70	67	56
	F1300BB10	Wire/Wire	Common	12	48	60	65	65	56
	F1300CA10	IEC/QC	Differential	13	13	64	70	67	56
20A	F1350AA10	QC/QC	Common	2	40	60	65	65	65
	F1350BB10	Wire/Wire	Differential	13	13	64	70	67	56
	F1350CA10	IEC/QC	Common						
	F1350CP10	IEC/PC	Differential						
20A	F1399AA20	QC/QC	Common	5	40	52	60	60	50
			Differential	5	12	50	65	60	55
	F1399BB20	Wire/Wire	Common	5	40	52	60	60	52
	F1399CA20	IEC/QC	Differential	5	12	50	65	60	55

NOTE: Other combinations of terminals may be specified on special order.

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F1300/F1350/F1399 RFI Filters (continued)

## Specifications:

Rated Voltage: 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	1A	2A	3A	6A	10A	15A	20A
	250VAC	1A	1.5A	2.5A	4A	6A	15A	16A

Current Overload: 6X for 8 seconds

Hi-Pot Test (1 min): **F1300/F1350**

Line to Ground: 1500VAC

Line to Line: 1768VDC

Insulation Resistance:  $9 \times 10^9 \Omega$  at 100VDC

Ambient Temperature: 40°C Max. at rated current

Humidity Range: 0% to 95% R.H.

Termination: A: QC - Quick Connect      C: IEC Receptacle  
B: Wire      P: PC - P.C. Board

Maximum Leakage Current: Each Line to Ground	<b>F1300</b>	<b>F1350</b>	<b>D1399</b>	<b>F1360</b>	<b>F1370</b>	<b>F1380</b>	<b>F1390</b>
115VAC, 60Hz:	0.4mA	0.25mA	0.25mA	.15mA	.002mA	.015mA	.030mA
250VAC, 50Hz:	.75mA	.40mA	0.45mA	.25mA	.005mA	.025mA	.050mA

Agency Approvals:




Except 15Amp

## F1300AA (1, 3, 6, 10 and 15Amp)

## F1350AA (1, 3, 6 and 10Amp) Dimensions


Amps	A	B	C	D	E
1A	2.750 (69,9)	1.750 (44,5)	1.125 (28,5)	2.375 (60,3)	2.925 (74,3)
3A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	3.49 (88,7)
6A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	3.49 (88,7)
10A	3.312 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,7)	3.49 (88,7)
15A	3.312 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,7)	3.49 (88,7)

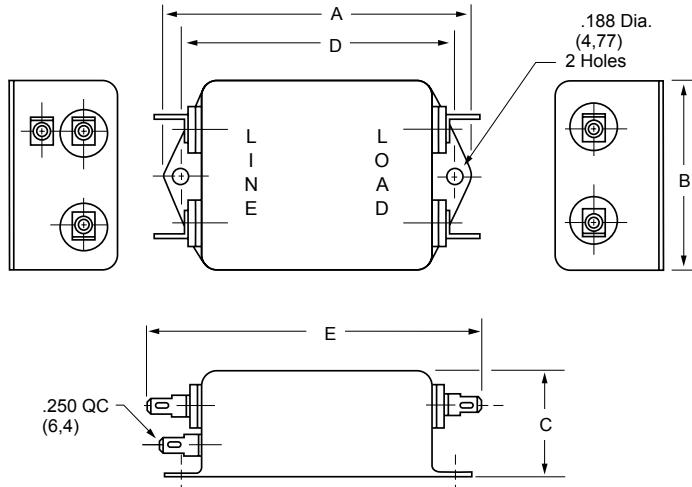


## F1300BB/F1350BB

## (1, 3, 6 and 10Amp) Dimensions



Amps	A	B	C	D	E
1A	2.750 (69,9)	1.750 (44,5)	1.125 (28,5)	2.375 (60,3)	2.000 (50,8)
3A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	2.500 (63,5)
6A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	2.500 (63,5)
10A	3.312 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,7)	2.500 (63,5)

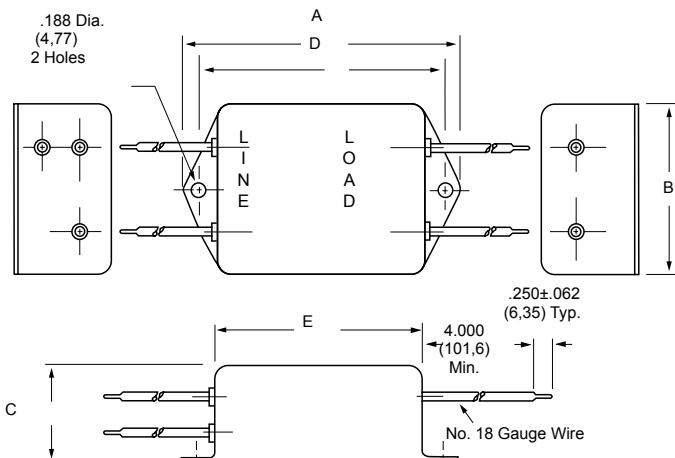

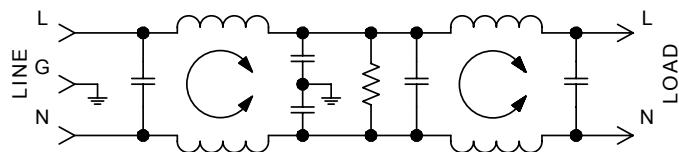
**F1300/F1350 Simplified Schematic****F1300CA (3, 6 and 10Amp)****F1350CA (3 and 6Amp) Dimensions**

Refer to Page 36  
for Standard  
Mounting Cutouts

Amps	A	B	C	D	E
3A	2.500 (63,6)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.565 (14,3)
6A	2.500 (63,5)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.565 (14,3)
10A	2.880 (73,1)	2.120 (53,8)	1.500 (38,1)	.65 (16,0)	.565 (14,3)

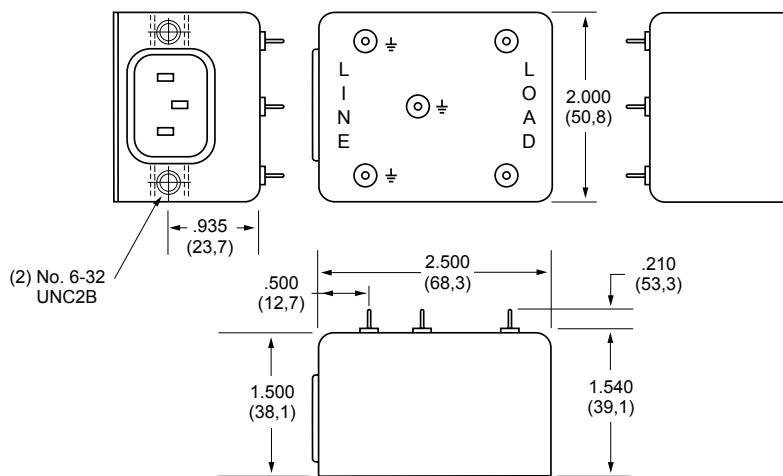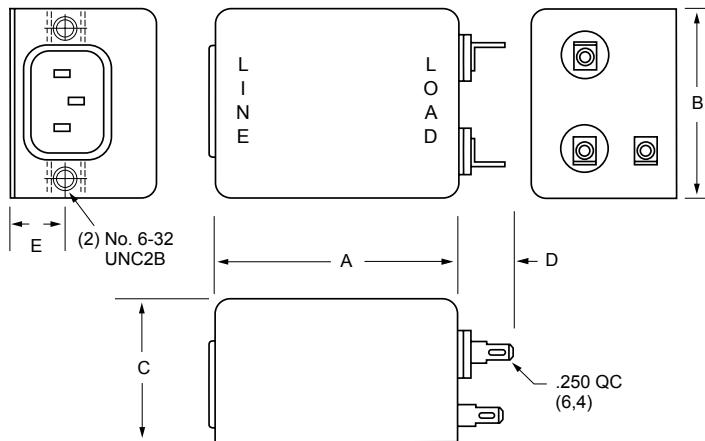**F1300CP/F1350CP  
(3Amp Only) Dimensions**

Refer to Page 36  
for Standard  
Mounting Cutouts

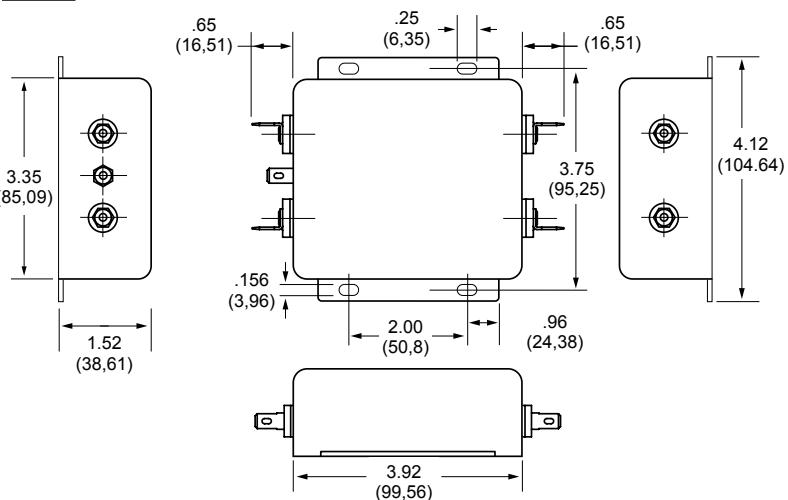**F1300AA/F1350AA  
(20Amp Only) Dimensions**

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.





**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F1300/F1399 RFI Filters (continued)

## F1399 Simplified Schematic

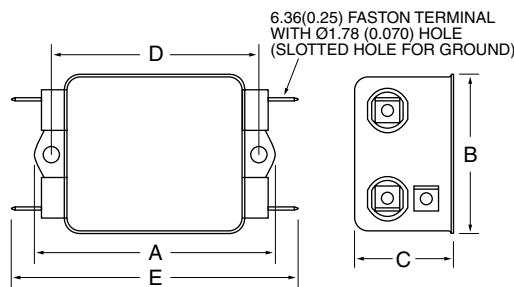
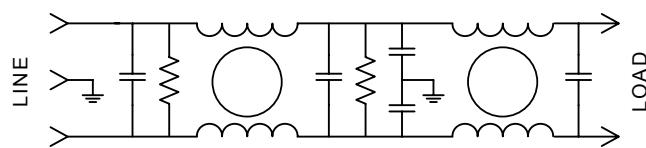


## F1399AA (2, 3, 6, 10 and 20Amp) Dimensions

Amps	A	B	C	D	E
2A	3.35 (85,1)	1.81 (46,0)	1.16 (29,5)	2.375 (60,33)	2.78 (70,6)
3A	3.85 (97,8)	2.07 (52,6)	1.16 (29,5)	2.938 (74,63)	3.35 (85,1)
6A	3.85 (97,8)	2.07 (52,6)	1.16 (29,5)	2.938 (74,63)	3.35 (85,1)
10A	3.85 (97,8)	2.07 (52,6)	1.53 (38,9)	2.938 (74,63)	3.35 (85,1)
20A	5.23 (132,8)	3.37 (85,6)	1.53 (38,9)	3.75 (95,25)	4.20 (106,7)


## F1399DD (10 and 20Amp) Dimensions

Amps	A	B	C	D	E
10A	3.96 (100,6)	2.07 (52,6)	1.53 (38,9)	2.938 (74,63)	3.35 (85,1)
20A	5.34 (135,6)	3.37 (85,6)	1.53 (38,9)	3.75 (95,25)	4.20 (106,7)

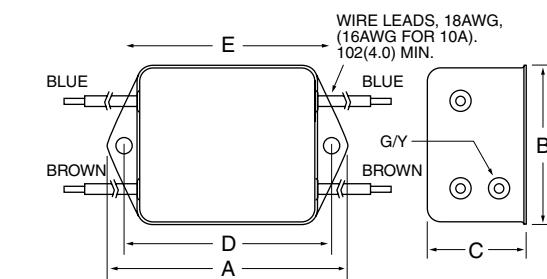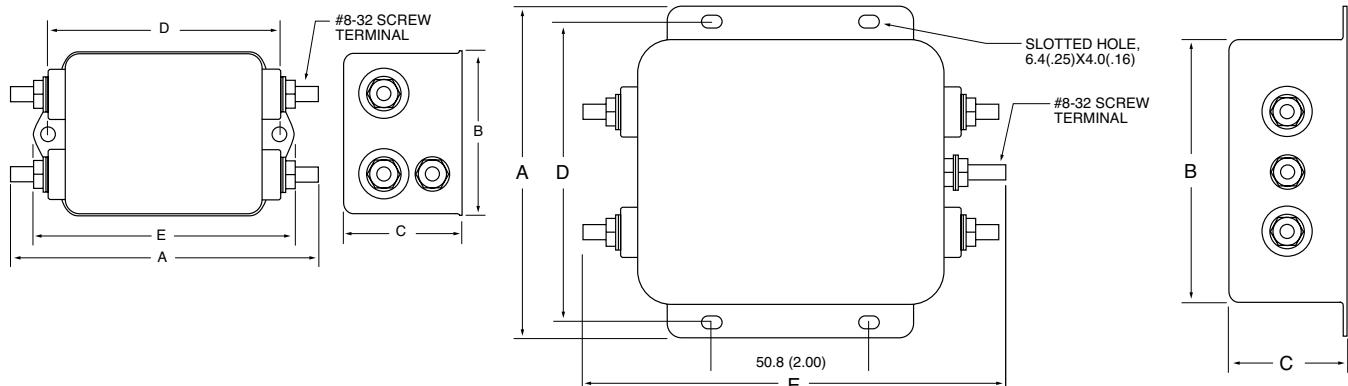

## F1399BB (2, 3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
2A	2.07 (52,6)	1.81 (46,0)	1.16 (29,5)	2.375 (60,33)	2.78 (70,6)
3A	2.56 (65,0)	2.07 (52,6)	1.16 (29,5)	2.938 (74,63)	3.35 (85,1)
6A	2.56 (65,0)	2.07 (52,6)	1.16 (29,5)	2.938 (74,63)	3.35 (85,1)
10A	2.56 (65,0)	2.07 (52,6)	1.53 (38,9)	2.938 (74,63)	3.35 (85,1)

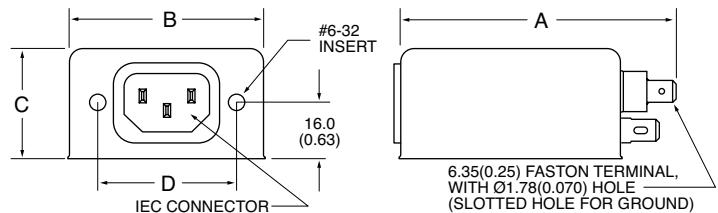


## F1399CA (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D
3A	4.33 (110,0)	2.25 (57,2)	1.28 (32,5)	1.575 (40,0)
6A	4.33 (110,0)	2.25 (57,2)	1.28 (32,5)	1.575 (40,0)
10A	4.33 (110,0)	2.25 (57,2)	1.53 (38,9)	1.575 (40,0)




# F1900 RFI Filters

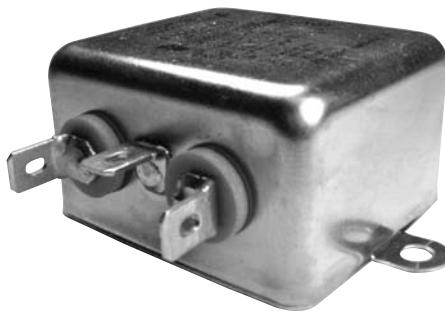

## Features:




- Designed for Equipment Requiring UL1410 Approval (Consumer Electronics)
- Utilizes UL1414 Approved Components
- Greater Differential Mode Protection

## F1900 Simplified Schematic

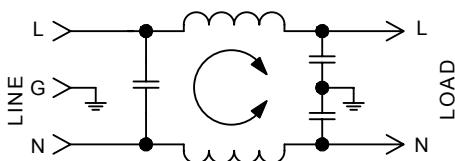

## F1900AA

(3 and 6Amp) Dimensions

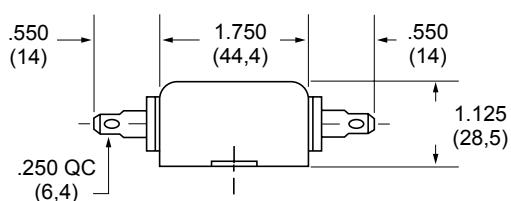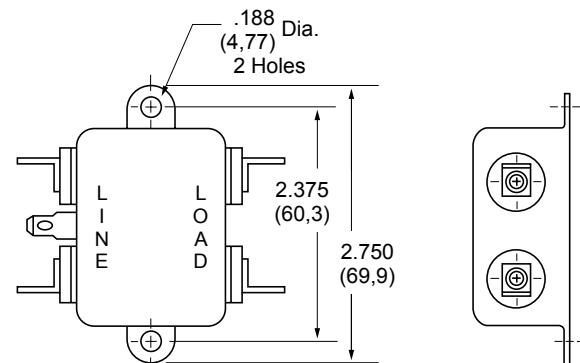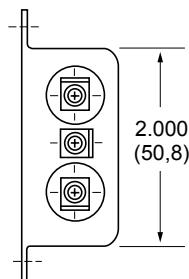

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	Frequency - MHz					
				.15	.50	1.0	5.0	10	30
3A	F1900AA03	QC/QC	Common Differential	20 7	30 19	37 28	50 50	50 57	50 70
6A	F1900AA06	QC/QC	Common Differential	10 8	20 18	27 24	45 45	45 52	45 64

NOTE: Other combinations of terminals may be specified on special order.

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# F1400 RFI Filters



## Features:

- High Peak Current Design — High Insertion Loss for Switching Power Supply Emissions
- Low-Leakage Current
- Compact Case Sizes in 6 and 10Amp Models
- Available with Integral IEC Connector in 3 and 6Amp Models

## F1400 Simplified Schematic

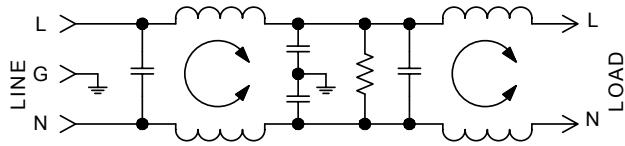

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
3A	3A	1.5A
6A	6A	4A
10A	10A	6A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

- A: QC — Quick Connect
- B: Wire
- C: IEC Receptacle

**Maximum Leakage Current:**

	F1400
Each Line to Ground	0.25mA
115VAC, 60Hz	0.25mA
250VAC, 50Hz	0.40mA


**Agency Approvals:**



Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F1400AA03 F1400BB03 F1400CA03	QC/QC Wire/Wire IEC/QC	Common Differential	58 40	65 60	65 65	65 65	60 65	44 60
6A	F1400AA06 F1400BB06 F1400CA06	QC/QC Wire/Wire IEC/QC	Common Differential	58 36	65 55	65 60	65 60	60 55	54 50
10A	F1400AA10 F1400BB10	QC/QC Wire/Wire	Common Differential	56 40	65 50	65 60	65 65	60 65	54 60

NOTE: Other combinations of terminals may be specified on special order.



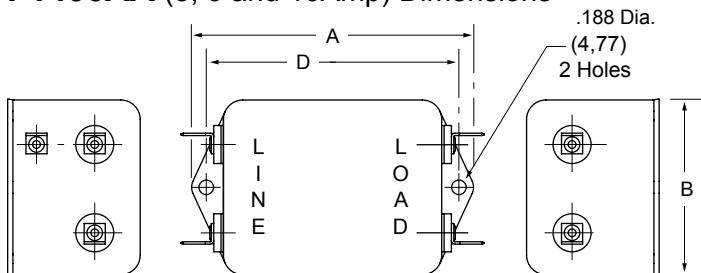


**F1400AA** (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E	F
3A	3.310 (84.1)	2.000 (50.8)	1.500 (38.1)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)
6A	3.310 (84.1)	2.000 (50.8)	1.500 (38.1)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)
10A	4.70 (119.4)	2.250 (57.1)	1.750 (44.4)	4.250 (107.9)	3.750 (95.3)	.550 (14.0)

**F1400BB** (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
3A	3.310 (84.1)	2.000 (50.8)	1.500 (38.1)	2.940 (74.7)	2.500 (63.5)
6A	3.310 (84.1)	2.000 (50.8)	1.500 (38.1)	2.940 (74.7)	2.500 (63.5)
10A	4.70 (119.4)	2.250 (57.1)	1.750 (44.4)	4.250 (107.9)	3.750 (95.3)

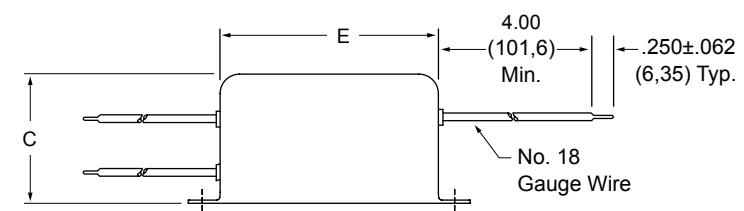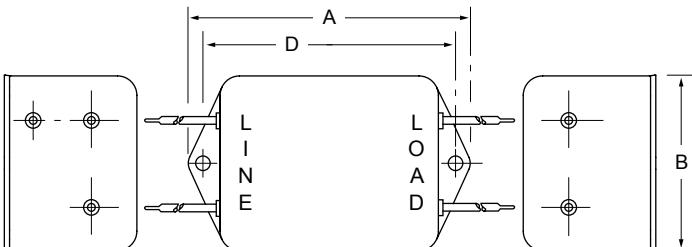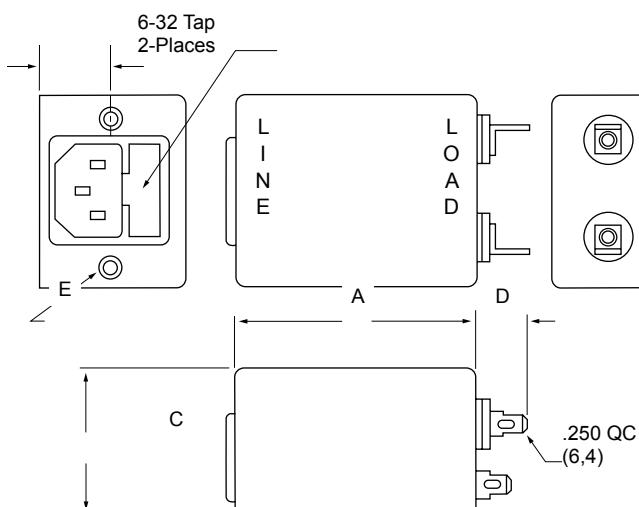**F1400CA** (3 and 6Amp) Dimensions

Refer to Page 36  
for Standard  
Mounting Cutouts

Amps	A	B	C	D	E
3A	2.880 (73.1)	2.120 (53.8)	1.500 (38.1)	.550 (14.0)	.565 (14.3)
6A	2.880 (73.1)	2.120 (53.8)	1.500 (38.1)	.550 (14.0)	.565 (14.3)

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.


1-800-657-0853



### Features:

- IEC Connector Plus  
Common and Differential  
Mode Performance in Compact Case
- "L" Circuit Configuration — Cost-Effective in Many  
Linear and Switching Power Supply Applications
- High-Inductance Design for Greater Attenuation
- Available with 0.250" Quick Connect Terminals or  
Wire Leads on the Load Side

### F1500AX/F1500CX Simplified Schematic

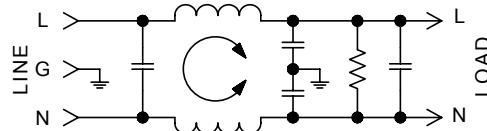

### Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC

3A 1.5A

6A 3A

10A 6A

15A 8A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC

Line to Line 1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

A: QC – Quick Connect

B: Wire

C: IEC Receptacle

F: IEC Receptacle with Fuse Holder

**Maximum Leakage Current:**

Each Line to Ground F1500


115VAC, 60Hz: 0.25mA

250VAC, 50Hz: 0.40mA

**Agency Approvals:**



### F1500FX Simplified Schematic

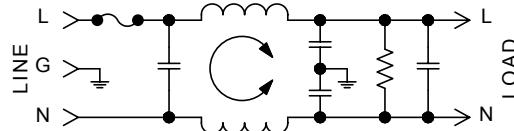

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F1500AA03 F1500CA03 F1500FA03 F1500CB03	QC/QC IEC/QC Fused IEC/QC QC/Wire	Common Differential	32 35	43 60	50 65	50 60	50 55	50 40
6A	F1500AX06 F1500CA06 F1500FA06 F1500CB06	IEC/QC Fused IEC/QC QC/Wire	Common Differential	32 30	42 60	45 65	45 65	45 60	45 50
10A	F1500AA10 F1500CA10 F1500FA10 F1500CB10	QC/QC IEC/QC Fused IEC/QC	Common Differential	29 15	36 50	39 65	45 65	45 60	45 50
15A	F1500CA15 F1500CB15	IEC/QC IEC/Wire	Common Differential	26 35	32 60	36 65	44 65	46 65	52 65

NOTE: Other combinations of terminals may be specified on special order.




**F1500AA** (3 and 10Amp) Dimensions

Refer to Page 36

for Standard

Mounting Cutouts

Amps	A	B	C	D	E
3A	3.31 (84,1)	2.000 (50,8)	1.13 (28,7)	2.938 (74,6)	2.50 (63,5)
10A	3.31 (84,1)	2.000 (50,8)	1.50 (38,1)	2.938 (74,6)	2.50 (63,5)

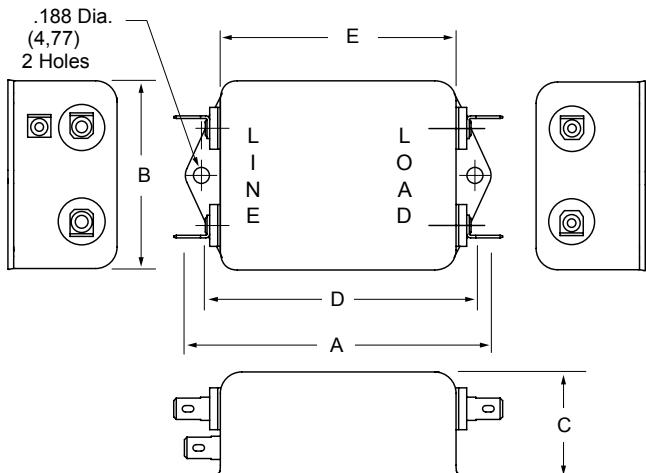**F1500CA**

(3, 6, 10 and 15Amp) Dimensions


**F1500CB**

(3, 6, 10 and 15Amp) Dimensions


Refer to Page 36

for Standard

Mounting Cutouts

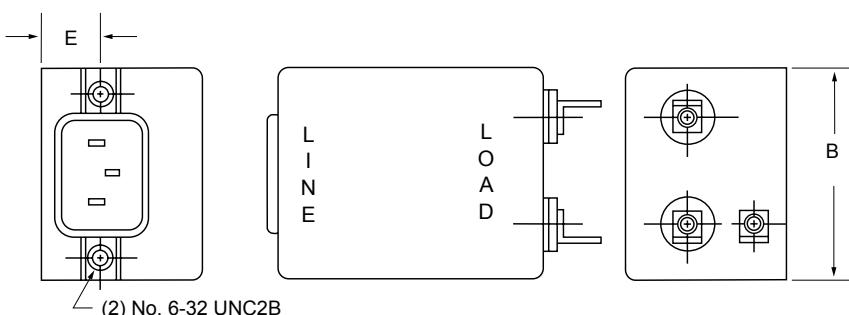

Amps	A	B	C	D	E
3A	2.000 (50,8)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.565 (14,3)
6A	2.500 (63,5)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.565 (14,3)
10A	2.500 (63,5)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.565 (14,3)
15A	3.25 (82,6)	2.25 (57,2)	1.75 (44,5)	.550 (14,0)	.705 (17,9)

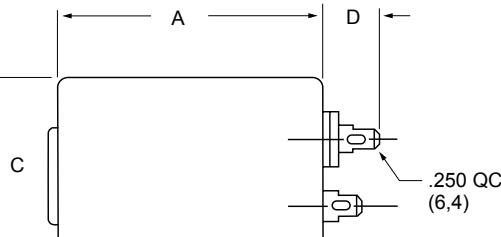
**F1500FA**

(3, 6 and 10Amp) Dimensions


Refer to Page 36

for Standard

Mounting Cutouts

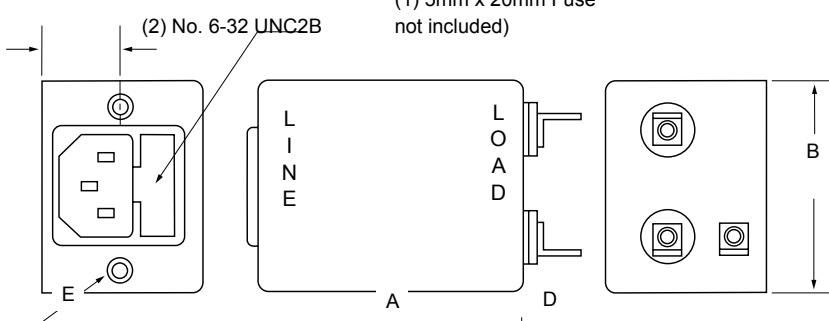

Amps	A	B	C	D	E
3A	2.000 (50,8)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.752 (19,1)
6A	2.500 (63,5)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.752 (19,1)
10A	2.500 (63,5)	2.000 (50,8)	1.500 (38,1)	.550 (14,0)	.752 (19,1)

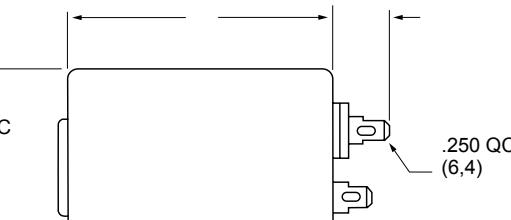

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# F1600 RFI Filters




## Features:

- T Section, Dual Coil Design – High Insertion Loss for Switching Power Supply Emissions
- Low-Leakage Current Design
- Space-Efficient with Integral IEC Connector and Compact Case in Current Ratings up to 10Amps
- Available in Fused IEC Connector and PC Mounted Versions

## F1600CX Simplified Schematic

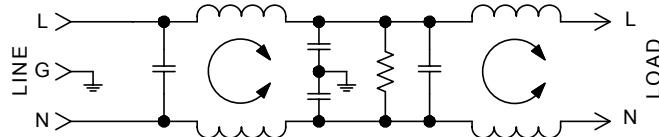

## F1600FA Simplified Schematic

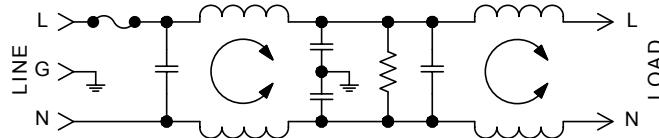

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
3A	3A	1.5A
6A	6A	3A
10A	10A	6A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

- A: QC – Quick Connect
- B: Wire
- C: IEC Receptacle
- P: PC – P.C. Board

**Maximum Leakage Current:**

Each Line to Ground	F1600
115VAC, 60Hz:	0.25mA
250VAC, 50Hz:	0.40mA


**Agency Approvals:**




Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F1600CA03 F1600CP03 F1600FA03 F1600CB03	IEC/QC IEC/PC Fused IEC/QC IEC/Wire	Common Differential	52 40	65 50	65 60	65 65	65 65	65 50
6A	F1600CA06 F1600CP06 F1600FA06 F1600CB06	IEC/QC IEC/PC Fused IEC/QC IEC/Wire	Common Differential	45 30	65 45	65 55	65 50	65 50	59 50
10A	F1600CA10 F1600CB10	IEC/QC IEC/Wire	Common Differential	50 23	65 45	65 55	65 50	65 50	54 50

NOTE: Other combinations of terminals may be specified on special order.

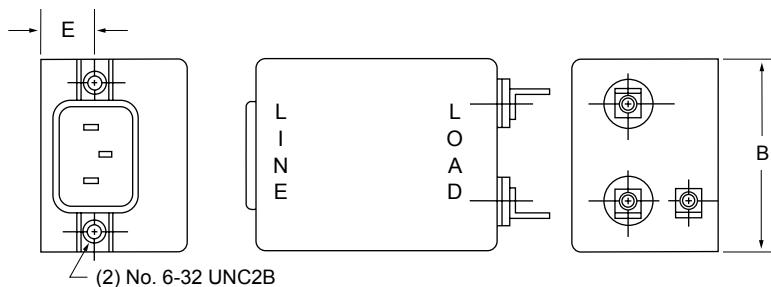

**F1600CA** (3, 6 and 10Amp) Dimensions **F1600CB** (3, 6 and 10Amp) Dimensions


Refer to Page 36  
for Standard  
Mounting Cutouts

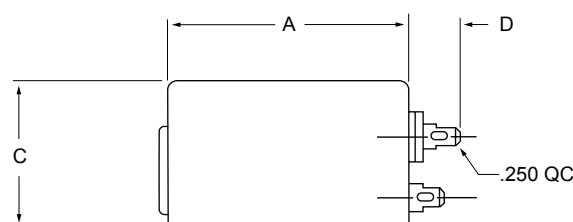


Amps	A	B	C	D	E
3A	2.500 (63,5)	2.000 (50,8)	1.500 (38,2)	.550 (14,0)	.565 (14,3)
6A	2.500 (63,5)	2.000 (50,8)	1.500 (38,2)	.550 (14,0)	.565 (14,3)
10A	3.750 (95,2)	2.250 (57,2)	1.750 (44,5)	.550 (14,0)	.640 (16,3)

**F1600CP**  
(3 and 6Amp)  
Dimensions

Refer to Page 36  
for Standard  
Mounting Cutouts

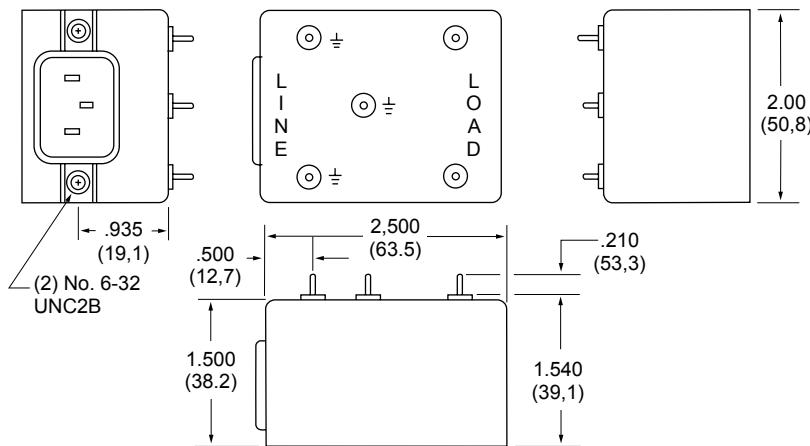**F1600FA**  
(3 and 6Amp)  
Dimensions

Refer to Page 36  
for Standard  
Mounting Cutouts

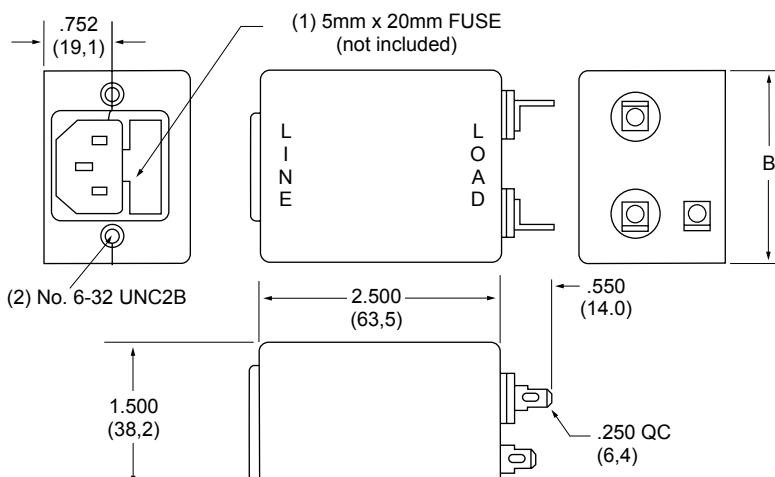

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F1700/F1799 RFI Filters

## Features:

- General Purpose — Designed for Applications with Higher Differential Mode Noise
- Higher Line-to-Line Capacitance for Protection from Pulsed, Intermittent or Continuous RFI
- A Cost-Effective Replacement for Independent Coil Design in Many SMPS Applications
- Available with Integral IEC Connector



## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
3A	3A	2.5A
6A	6A	4A
10A	10A	6A
20A	20A	10A
30A	30A	15A

**Current Overload:** 6X for 8 seconds

### Hi-Pot Test (1 min):

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

### Termination:

A: QC – Quick Connect	C: IEC Receptacle
B: Wire	D: Screw

### Maximum Leakage Current:


Each Line to Ground	F1700	F1710	F1720	F1740	F1799
115VAC, 60Hz:	0.40mA	.15mA	.002mA	.060mA	0.25mA
250VAC, 50Hz:	0.75mA	.25mA	.005mA	.120mA	0.45mA

### Agency Approvals:




Except 30Amp

## F1700 Simplified Schematic

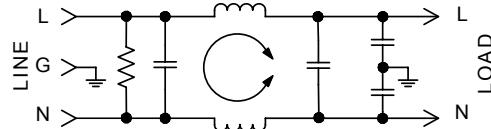


## F1799 Simplified Schematic

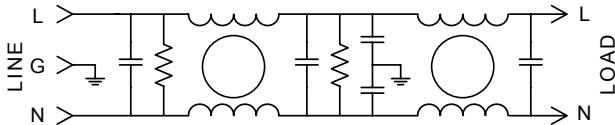

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F1700AA03 F1700BB03 F1700CA03	QC/QC Wire/Wire IEC/QC	Common Differential	20 25	35 60	43 65	52 65	55 50	50 50
	F1710AA03	QC/QC	Common Differential	20 25	34 60	40 65	45 65	45 50	40 50
	F1720AA03	QC/QC	Common Differential	20 35	32 60	35 65	35 60	35 55	40 40
	F1740AA03	QC/QC	Common Differential	20 35	30 60	35 65	35 60	35 55	40 40
6A	F1700AA06 F1700BB06 F1700CA06	QC/QC Wire/Wire IEC/QC	Common Differential	10 15	22 50	30 65	46 60	50 60	45 60
10A	F1700AA10 F1700BB10 F1700CA10	QC/QC Wire/Wire IEC/QC	Common Differential	10 20	22 45	30 60	46 65	50 60	45 55
20A	F1700AA20	QC/QC Screw/Screw	Common Differential	10 15	22 45	30 60	42 65	47 60	40 55
	F1700DD20 F1720DD20	Screw/Screw	Common Differential	10 15	22 45	30 60	42 65	47 60	52 55
30A	F1700DD30	Screw/Screw	Common Differential	7 15	15 45	20 60	34 65	42 60	40 55
	F1799DD30	Screw/Screw	Common Differential	10 15	45 65	55 65	60 65	60 60	50 55

NOTE: Other combinations of terminals may be specified on special order.


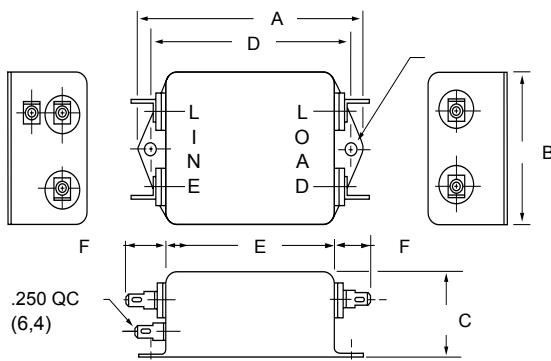


**F1700AA, 1710, 1720, 1740** (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E	F
3A	2.750 (69.8)	1.750 (44.4)	1.125 (28.5)	2.375 (60.3)	2.000 (50.8)	.550 (14.0)
6A	3.312 (84.1)	2.000 (50.8)	1.125 (28.5)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)
10A	3.312 (84.1)	2.000 (50.8)	1.500 (38.2)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)
20A						See 1700DD20 for Case Dimensions

**F1700BB** (3, 6 and 10Amp) Dimensions


Amps	A	B	C	D	E
3A	2.750 (69.8)	1.750 (44.4)	1.125 (28.5)	2.375 (60.3)	2.000 (50.8)
6A	3.312 (84.1)	2.000 (50.8)	1.125 (28.5)	2.940 (74.7)	2.500 (63.5)
10A	3.312 (84.1)	2.000 (50.8)	1.500 (38.1)	2.940 (74.7)	2.500 (63.5)

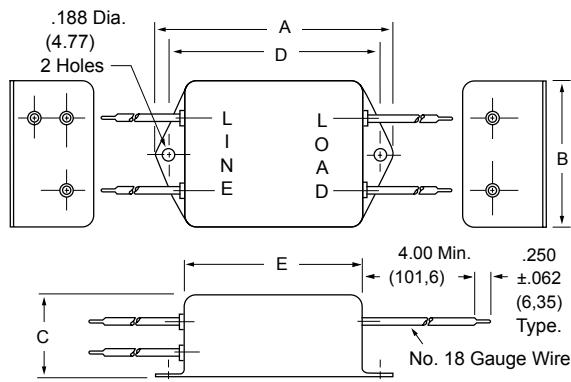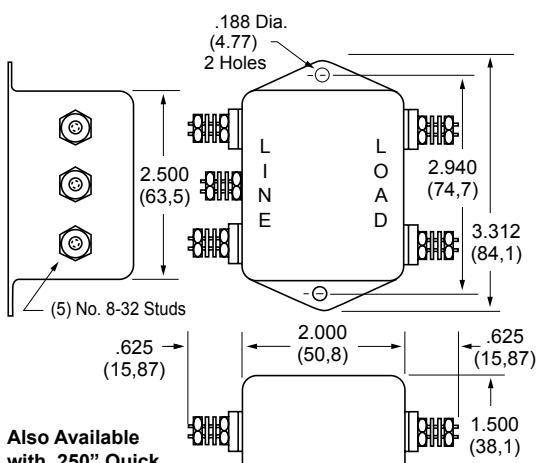**F1700DD20** (20Amp) Dimensions

Also Available with .250" Quick Connect Terminals

**F1700CA**

(3, 6 and 10Amp) Dimensions


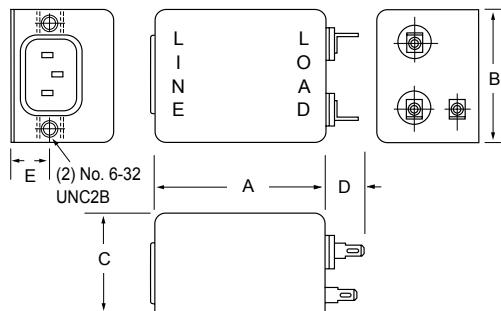


Refer to Page 40  
for Standard  
Mounting Cutouts

Amps	A	B	C	D	E
3A	2.000 (50.8)	2.000 (50.8)	1.500 (38.1)	.550 (14.0)	.565 (14.3)
6A	2.500 (63.5)	2.000 (50.8)	1.500 (38.1)	.550 (14.0)	.565 (14.3)
10A	2.500 (63.5)	2.000 (50.8)	1.500 (38.1)	.550 (14.0)	.565 (14.3)

**F1700DD30**

(30Amp) Dimensions

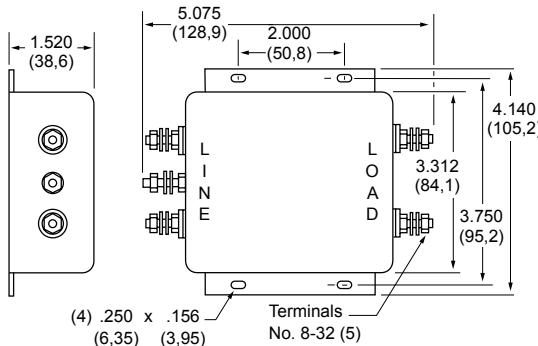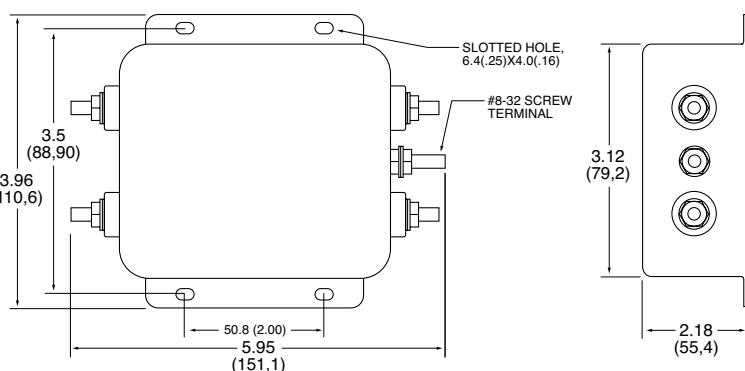**F1799DD** (30Amp) Dimensions

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# F1760/F1770/F1780 RFI Filters



## Features:

- Designed for Applications Where Switching Power Supplies, SCR's and TTL Circuits Are Utilized
- Protection from Pulsed, Intermittent or Continuous RFI
- Effective CM and DM Suppression for Most FCC VDE Requirements Down to 150KHz
- Available in Stud and Quick Connect Terminal Versions

## F1760 Simplified Schematic

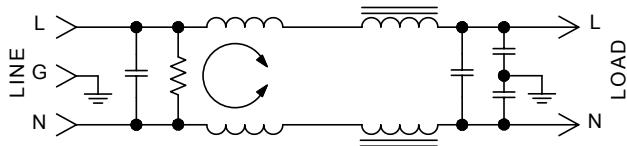

## Specifications:

**Rated Voltage:** 250VAC, Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC  
20A 14A

**Current Overload:** 6X for 8 seconds

### Hi-Pot Test (1 min):

Line to Ground 1500VAC  
Line to Line 1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

### Termination:

A: QC – Quick Connect  
D: Screw


### Maximum Leakage Current:

Each Line to Ground	<b>F1760/1770/1780</b>
115VAC, 60Hz:	0.5mA
250VAC, 50Hz:	1.0mA

### Agency Approvals:




## F1770 Simplified Schematic


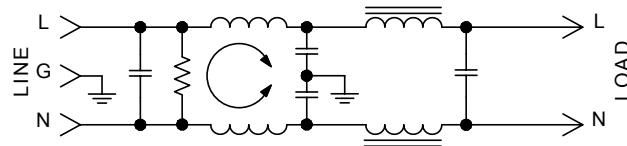


Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)							
			MODE	Frequency - MHz						
				.15	.50	1.0	5.0	10	20	30
3A	F1760AA03	QC/QC	Common	15	30	40	45	50	45	45
	F1760DD03	Screw/Screw	Differential	40	65	65	60	55	55	55
6A	F1780AA03	QC/QC	Common	13	25	40	60	60	55	50
	F1780DD03	Screw/Screw	Differential	40	65	65	62	55	45	45
6A	F1760AA06	QC/QC	Common	15	30	35	35	44	43	42
	F1760DD06	Screw/Screw	Differential	40	65	65	65	53	52	50
10A	F1780AA06	QC/QC	Common	13	30	40	65	65	53	48
	F1780DD06	Screw/Screw	Differential	40	65	65	62	55	45	45
10A	F1760AA10	QC/QC	Common	15	30	35	50	50	40	40
	F1760DD10	Screw/Screw	Differential	40	65	65	55	50	50	50
10A	F1780AA10	QC/QC	Common	13	20	35	65	65	55	50
	F1780DD10	Screw/Screw	Differential	40	65	65	62	55	45	45
20A	F1760AA20	QC/QC	Common	12	25	31	42	47	50	40
	F1760DD20	Screw/Screw	Differential	41	65	65	65	60	60	55
20A	F1780AA20	QC/QC	Common	12	30	32	60	60	60	55
	F1780DD20	Screw/Screw	Differential	41	65	65	65	60	60	55

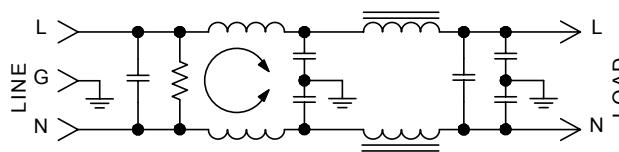

**F1780 Simplified Schematic**

Amps	A	B	C	D	E	F
3A	2.750 (69.8)	1.750 (44.4)	1.125 (28.5)	2.375 (60.3)	2.000 (50.8)	.550 (14.0)
6A	3.312 (84.1)	2.000 (50.8)	1.500 (38.2)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)
10A	3.312 (84.1)	2.000 (50.8)	1.500 (38.2)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)

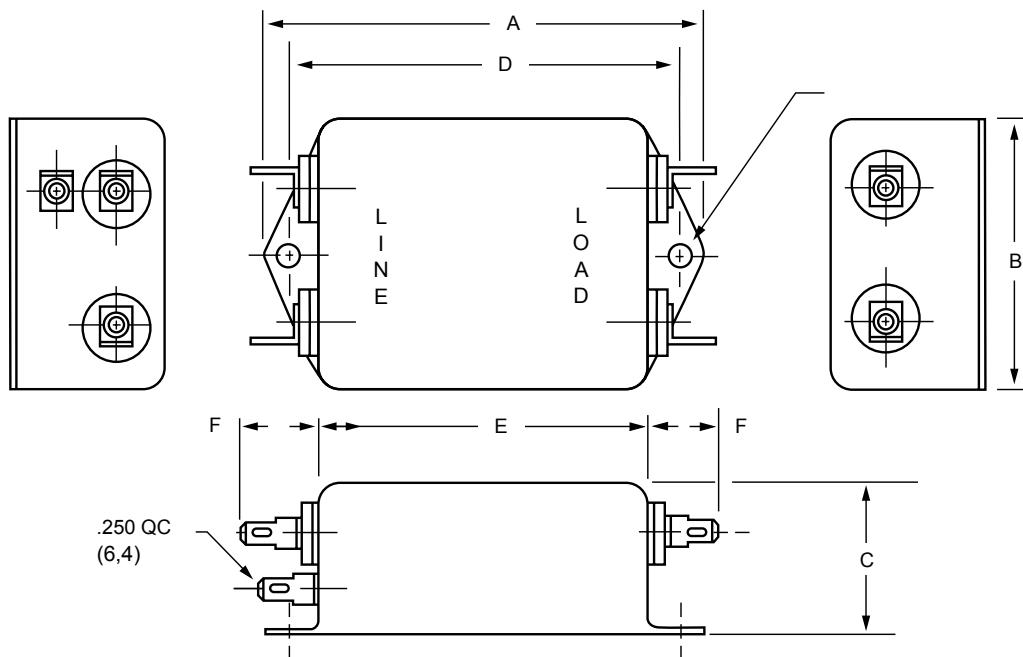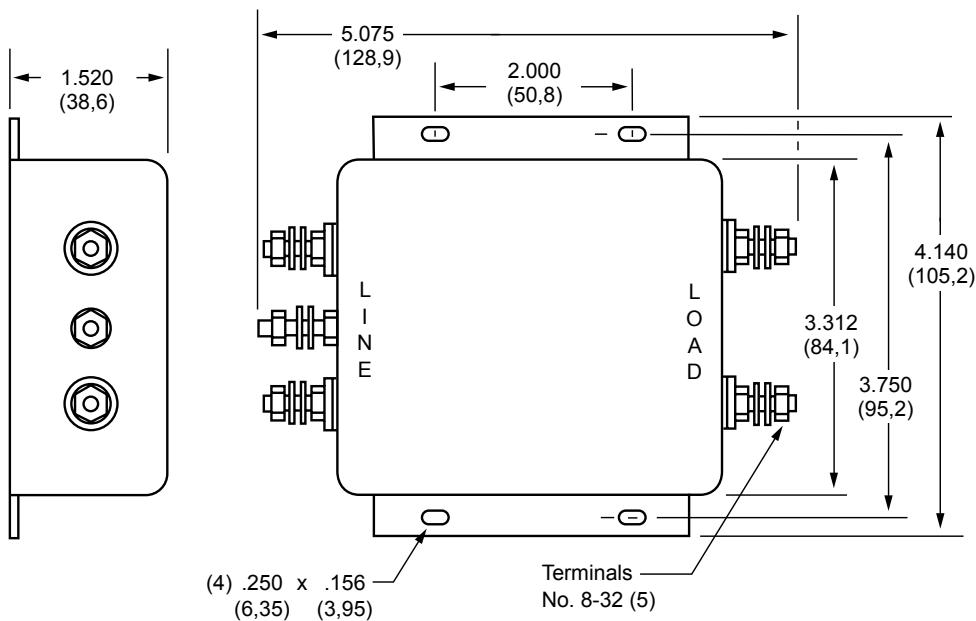**F1760/F1770/1780AA  
(3, 6, and 10Amp) Dimensions****F1760/F1770/1780 (20Amp Only) Dimensions**


Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# F2800 RFI Filters

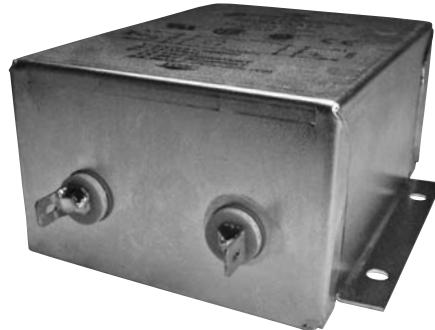


## Features:

- Designed for VDE "A" and FCC "B" Switching Power Supply Applications
- Low-Leakage Current
- Compact Case Sizes in Current Ratings up to 15A
- Effective Reduction of Common Mode and Differential Mode Noise from 100KHz to 30MHz

## F2800 Simplified Schematic 3 & 6Amp

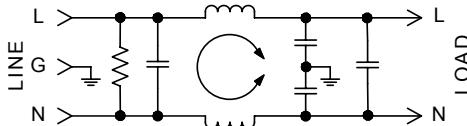

## F2800 Simplified Schematic 10 & 15Amp

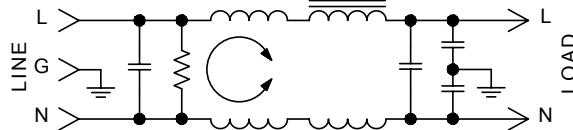

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)									
			MODE	.01	.05	.15	.50	1.0	5.0	10	30	
3A	F2800AA03 F2800BB03	QC/QC Wire/Wire	Common Differential	10 5	30 25	35 50	35 60	35 65	40 50	45 45	50 45	
6A	F2800AA06 F2800BB06	QC/QC Wire/Wire	Common Differential	5 5	20 10	30 40	35 60	40 60	40 50	40 50	50 45	
10A	F2800AA10 F2800BB10	QC/QC Wire/Wire	Common Differential	5 7	15 20	25 50	30 60	35 60	40 60	45 60	50 55	
15A	F2800AA15 F2800BB15	QC/QC Wire/Wire	Common Differential	8 10	21 30	29 70	33 70	36 70	38 70	45 70	50 60	

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
3A	3A	1.5A
6A	6A	4A
10A	10A	6A
15A	15A	12A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**


A: QC – Quick Connect
B: Wire

**Maximum Leakage Current:**


Each Line to Ground	<b>F2800</b>
115VAC, 60Hz:	0.25mA
250VAC, 50Hz:	0.40mA

**Agency Approvals:**




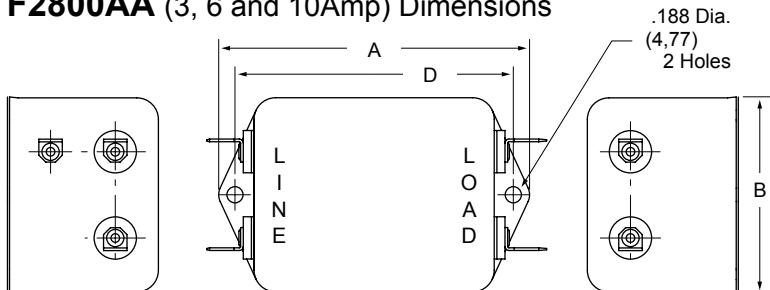


**F2800AA** (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E	F
3A	3.310 (84,1)	2.000 (50,8)	1.500 (38,2)	2.940 (74,7)	2.500 (63,5)	.550 (14,0)
6A	3.310 (84,1)	2.000 (50,8)	1.500 (38,2)	2.940 (74,7)	2.500 (63,5)	.550 (14,0)
10A	4.44 (113)	2.250 (57,1)	1.750 (44,4)	4.063 (103,2)	3.630 (92,2)	.650 (16,5)

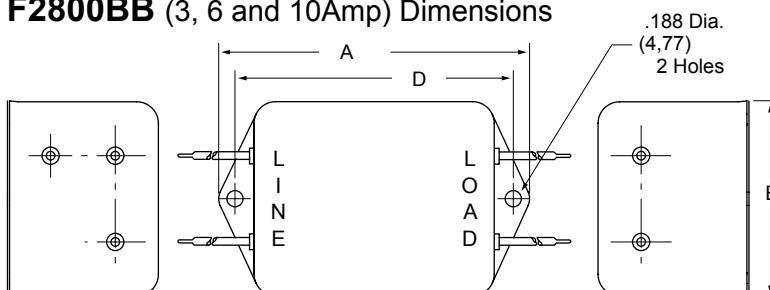**F2800BB** (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
3A	3.310 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,7)	2.500 (63,5)
6A	3.310 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,7)	2.500 (63,5)
10A	4.690 (119)	2.250 (57,1)	1.750 (44,4)	4.063 (103,2)	3.630 (92,2)

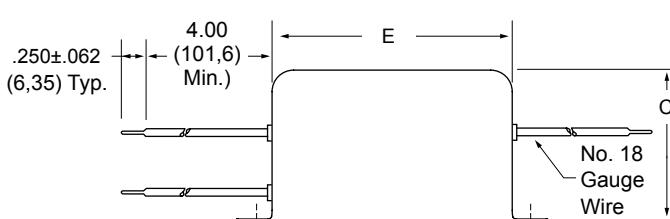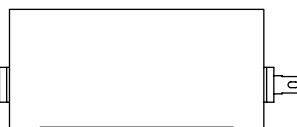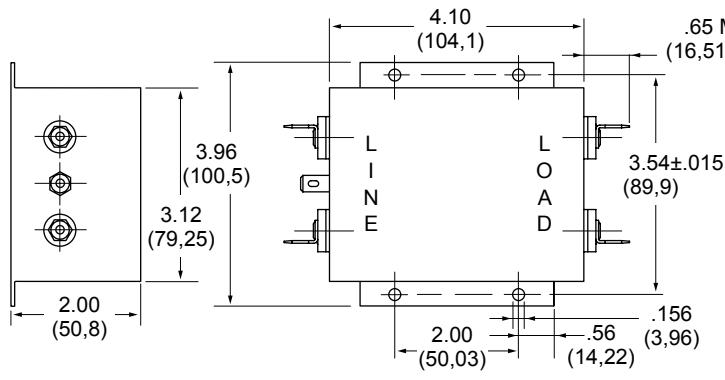
**F2800AA**  
**F2800BB**  
(15Amp)  
Dimensions


Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F5100 RFI Filters

Wide Band

SINGLE PHASE FILTERS

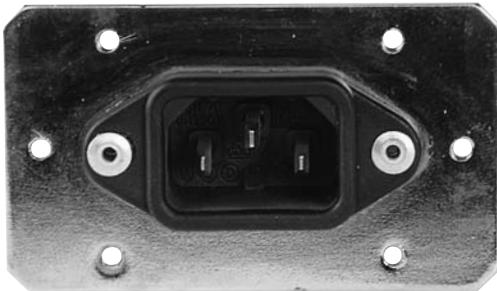

Ideal for Linear Power Supplies in Digital Equipment

## Features:

- General Purpose Filter with Extended High-Frequency Insertion Loss Characteristics
- Effective Suppression of Incoming Common Mode and Differential Mode Noise
- Low-Profile Package with Integral IEC Connector
- Available in 3, 6 and 10Amp Ratings

Nominal Current Rating	Part Number	Termination Line/Load
3A	F5100CG03	IEC/ Solder Tab
6A	F5100CG06	IEC/ Solder Tab
10A	F5100CG10	IEC/ Solder Tab

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
3A	1.5A	
6A	4A	
10A	6A	

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground	1400VDC
Line to Line	1450VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

C: IEC Receptacle
G: Wire Wrap/Solder


**Maximum Leakage Current:**

Each Line to Ground	F5100
115VAC, 60Hz:	0.25mA
250VAC, 60Hz:	0.50mA


**Agency Approvals:**



## F5100 Simplified Schematic

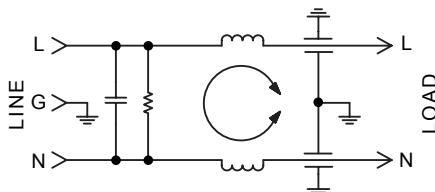


**F5100 SERIES  
TYPICAL COMMON MODE  
INSERTION LOSS — dB  
(50 OHM CIRCUIT)**

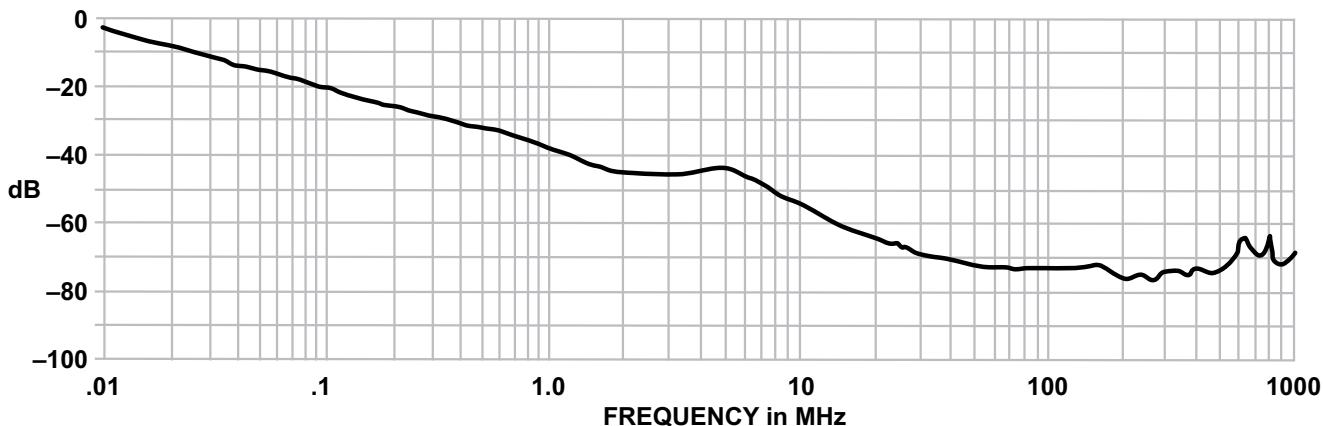


**F5100CG** (3, 6 and 10Amp) Dimensions

Refer to Page 36  
for Standard  
Mounting Cutouts

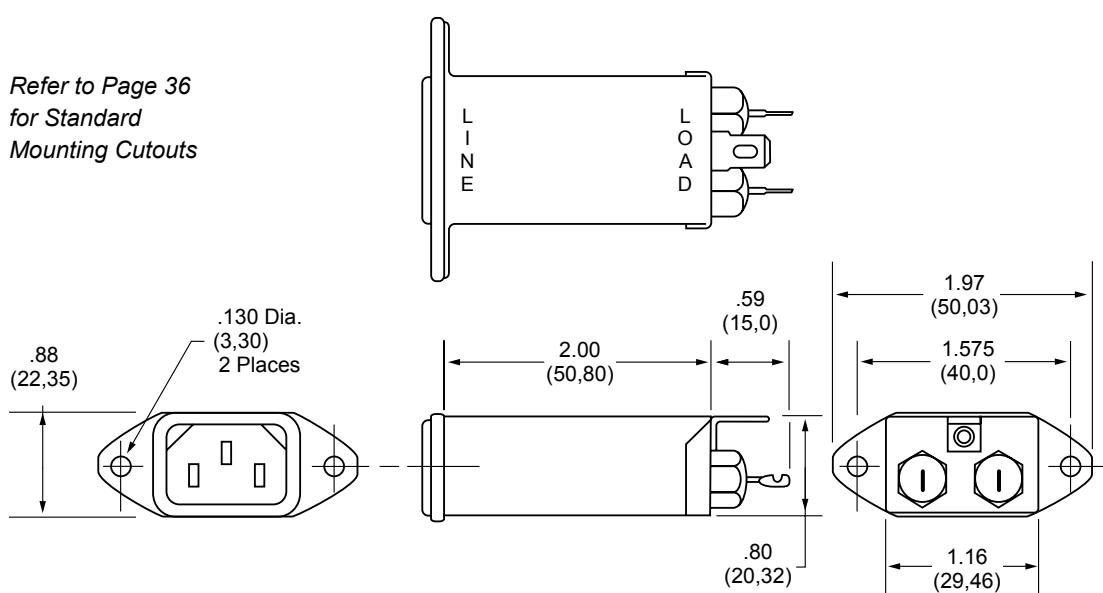**F5101CG** (3, 6 and 10Amp) Dimensions with attached mounting plate

Refer to Page 37  
for Standard  
Mounting Cutouts

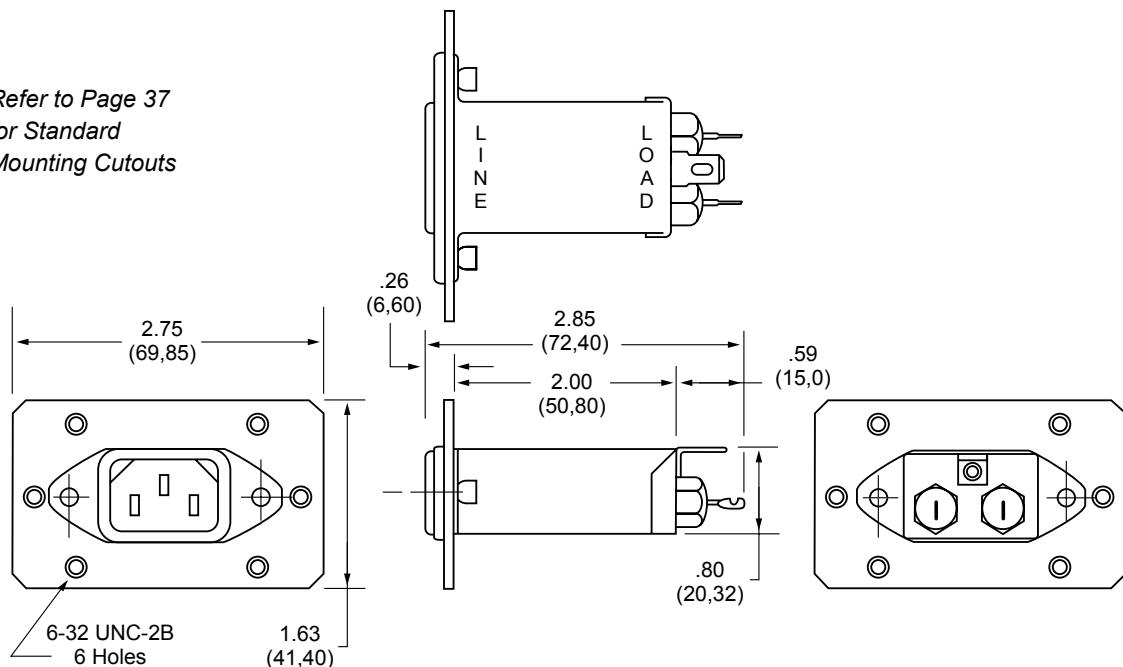

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F5200 RFI Filters

Wide Band

SINGLE PHASE FILTERS



Ideal for Linear Power Supplies in Digital Equipment

## Features:

- General Purpose Filter with Extended High-Frequency Insertion Loss Characteristics
- Effective Suppression of Incoming Common Mode and Differential Mode Noise
- Low-Profile Package with Integral IEC Connector
- Available in 3 and 6Amp Ratings

Nominal Current Rating	Part Number	Termination Line/Load
3A	F5200FG03	Fused IEC/Solder Tab
6A	F5200FG06	Fused IEC/Solder Tab

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC  
3A 1.5A  
6A 4A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1400VDC  
Line to Line 1450VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

F: Fused IEC Receptacle  
G: Wire Wrap/Solder


**Maximum Leakage Current:**

Each Line to Ground	<b>F5200</b>
115VAC, 60Hz:	0.25mA
250VAC, 60Hz:	0.50mA


**Agency Approvals:**



## F5200 Simplified Schematic

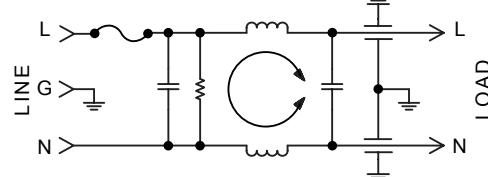


**F5200 SERIES  
TYPICAL COMMON MODE  
INSERTION LOSS — dB  
(50 OHM CIRCUIT)**

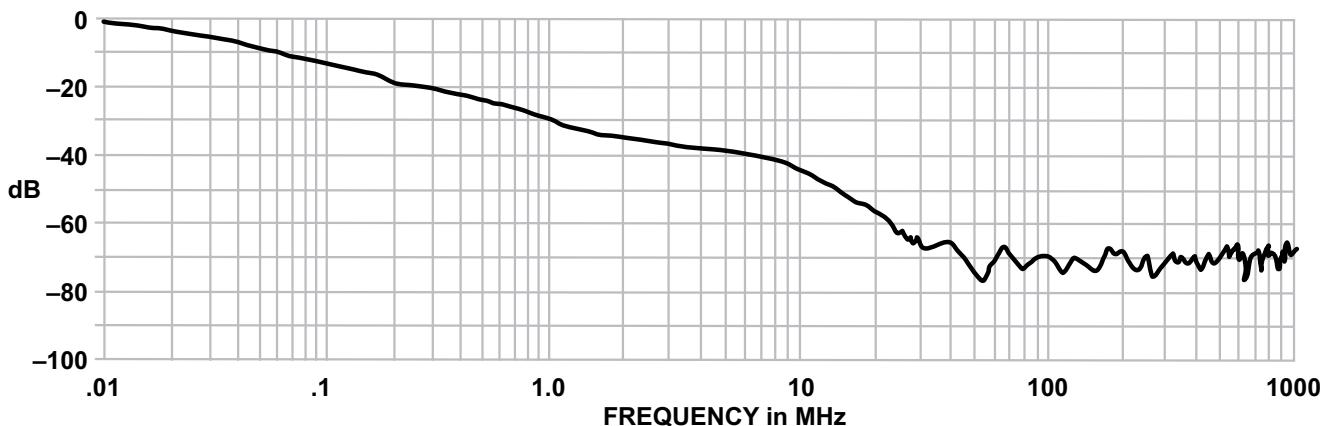


**F5200FG** (3 and 6Amp) Dimensions

Refer to Page 36  
for Standard  
Mounting Cutouts

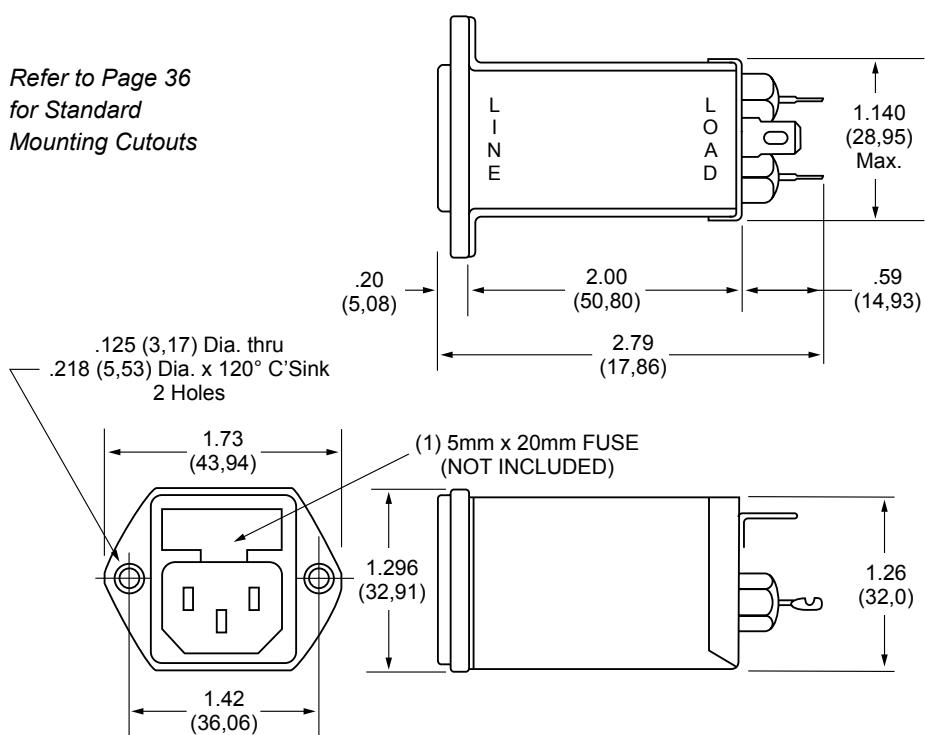**F5201FG** (3 and 6Amp) Dimensions with attached mounting plate

Refer to Page 37  
for Standard  
Mounting Cutouts

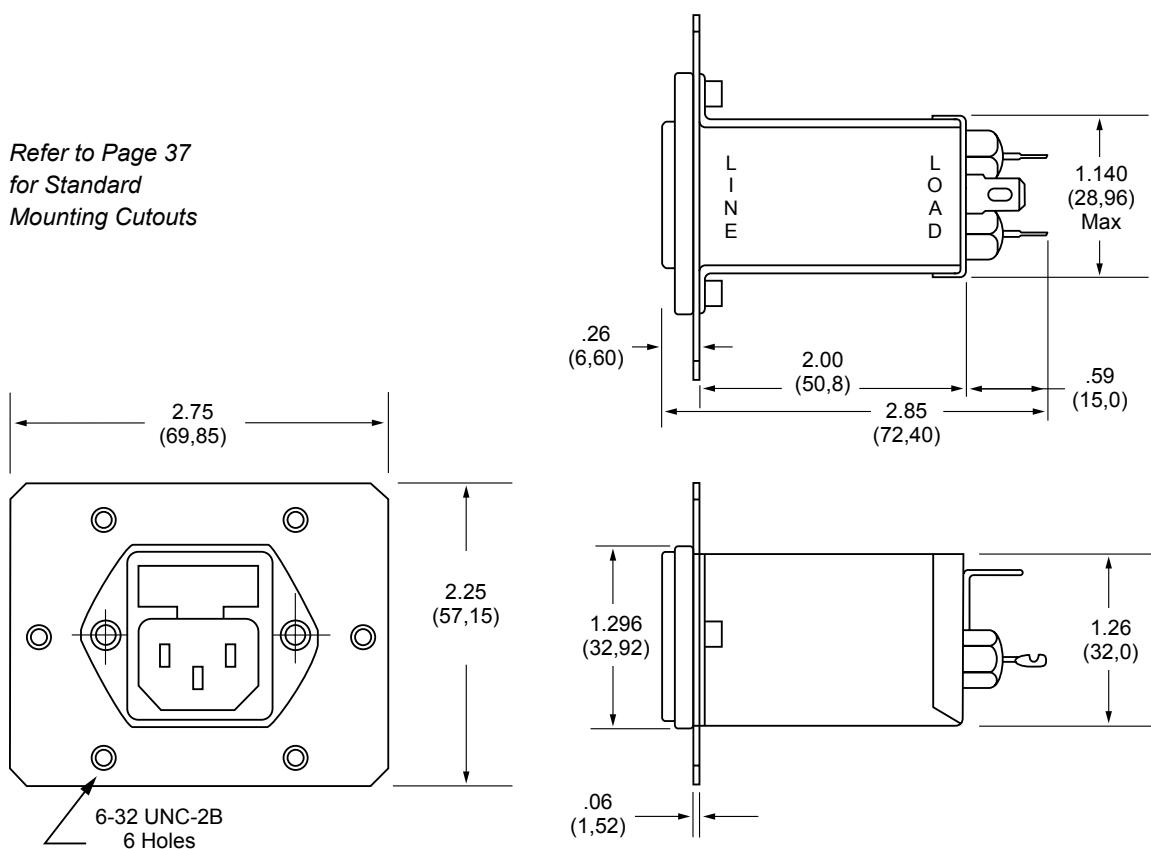

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F5500 RFI Filters

Wide Band

SINGLE PHASE FILTERS




Ideal for Linear and Switching Power Supplies

## Features:

- FCC and VDE Level "A" Applications
- High Inductance Single Coil Design Provides High Common Mode and Differential Mode Performance Above 150KHz
- High-Frequency Construction Techniques Maintain >50dB Insertion Loss from 10MHz to 1GHz
- Compact, Space-Saving Package Available in 3, 6 and 10-Amp Ratings

## F5500 Simplified Schematic

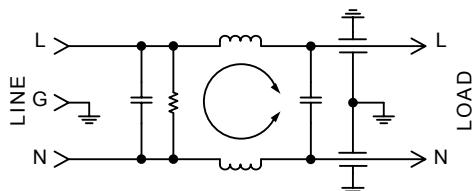

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
3A	3A	3A
6A	4A	4A
10A	6A	6A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground	1400VDC
Line to Line	1450VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

C: IEC Receptacle  
G: Wire Wrap/Solder

### Maximum Leakage Current:


Each Line to Ground	F5500
115VAC, 60Hz:	0.25mA
250VAC, 60Hz:	0.50mA


### Agency Approvals:




Nominal Current Rating	Part Number	Termination Line/Load
3A	F5500CG03	IEC/Solder Tab
6A	F5500CG06	IEC/Solder Tab
10A	F5500CG10	IEC/Solder Tab

### F5500 SERIES TYPICAL COMMON MODE INSERTION LOSS — dB (50 OHM CIRCUIT)

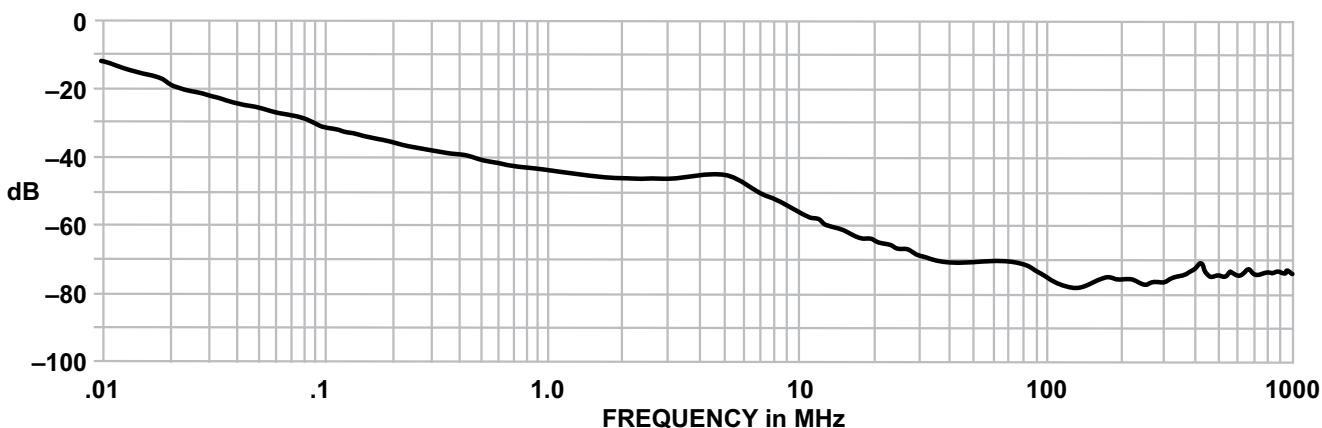

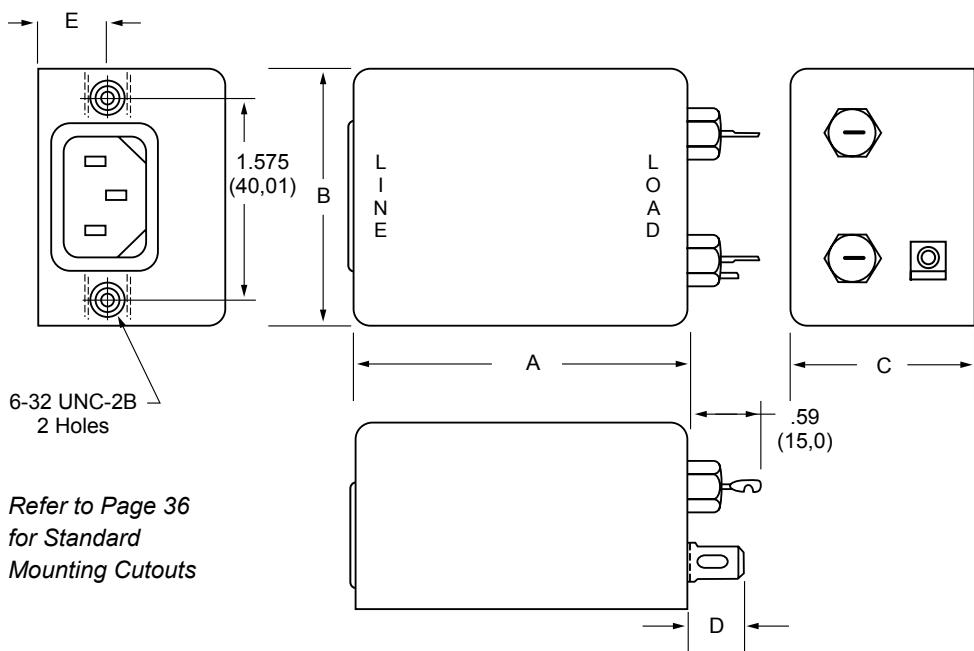**F5500CG** (3, 6 and 10Amp) Dimensions

Amps	A	B	C	D	E
3A	2.000 (50,8)	2.000 (50,8)	1.500 (38,2)	.450 (11,4)	.565 (14,3)
6A	2.88 (73,1)	2.13 (54,1)	1.500 (38,2)	.450 (11,4)	.565 (14,3)
10A	2.88 (73,1)	2.13 (54,1)	1.500 (38,2)	.450 (11,4)	.565 (14,3)

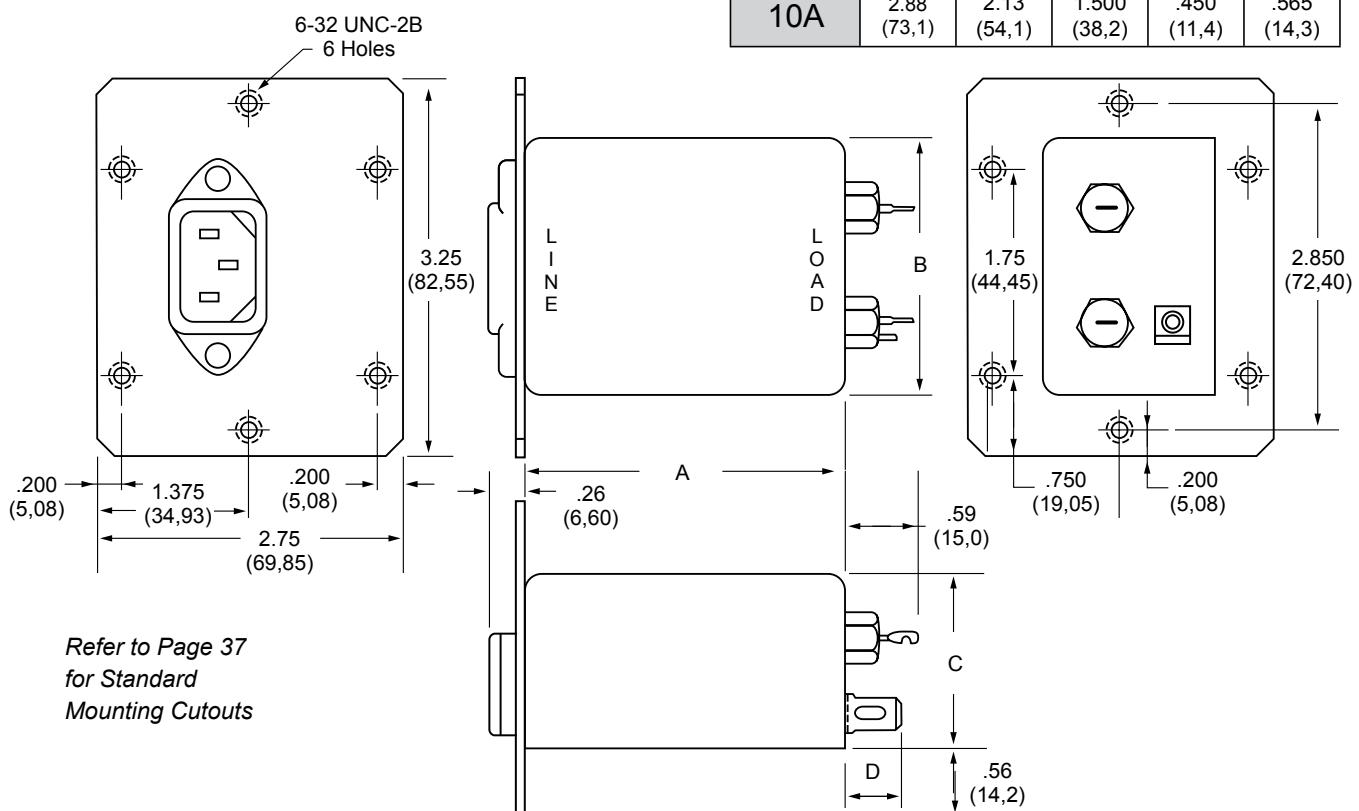**F5501CG** (3, 6 and 10Amp) Dimensions  
with attached mounting plate

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F5600 RFI Filters

Wide Band

SINGLE PHASE FILTERS

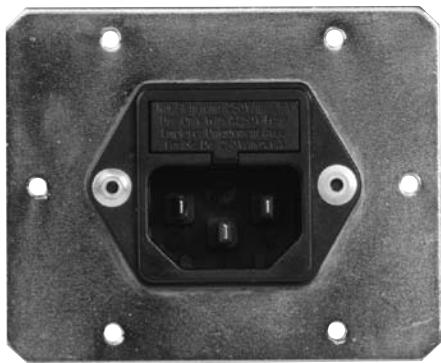

## Features:

- Suited for FCC "B" and VDE "A" Switching Power Supply Applications
- High Inductance, Multi-Stage Design with High Common Mode and Differential Mode Insertion Loss for Switching Power Supply Emissions
- >70dB Insertion Loss from 200KHz to 1GHz
- Compact, Space-Efficient Package Available in 3 and 6Amp Ratings

Nominal Current Rating	Part Number	Termination Line/Load
3A	F5600CG03	IEC/Solder Tab
	F5600FG03	Fused IEC/Solder Tab
6A	F5600CG06	IEC/Solder Tab
	F5600FG06	Fused IEC/Solder Tab

## Specifications:

Rated Voltage: 250VAC Maximum - 50/60 Hz

Rated Current:	115VAC	250VAC
	3A	1.5A
	6A	4A

Current Overload: 6X for 8 seconds

Hi-Pot Test (1 min):

Line to Ground	1400VDC
Line to Line	1450VDC

Insulation Resistance:  $9 \times 10^9 \Omega$  at 100VDC

Ambient Temperature: 40°C Max at rated current

Humidity Range: 0% to 95% R.H.

Termination:

C: IEC Receptacle  
F: Fused IEC Receptacle  
G: Wire Wrap/Solder

Termination: Quick Connect


Maximum Leakage Current:

Each Line to Ground	F5600
115VAC, 60Hz:	0.50mA
250VAC, 60Hz:	1.20mA


Agency Approvals:





## F5600 Simplified Schematic

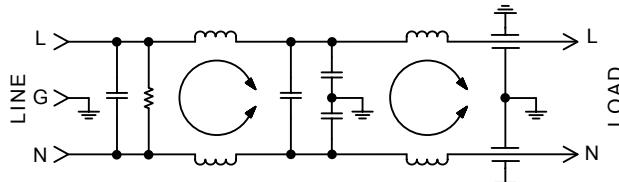

F5600 SERIES  
TYPICAL COMMON MODE  
INSERTION LOSS — dB  
(50 OHM CIRCUIT)

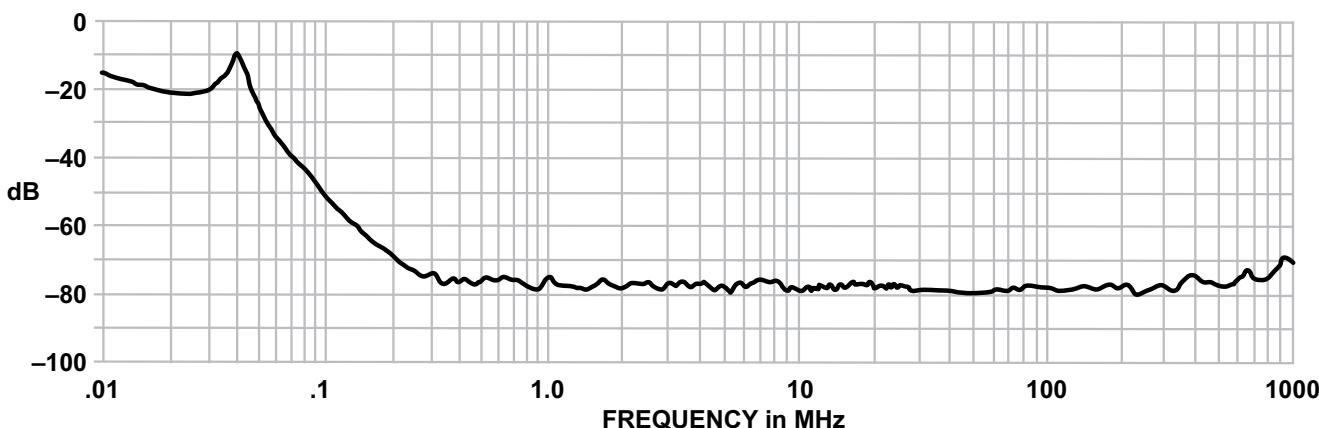

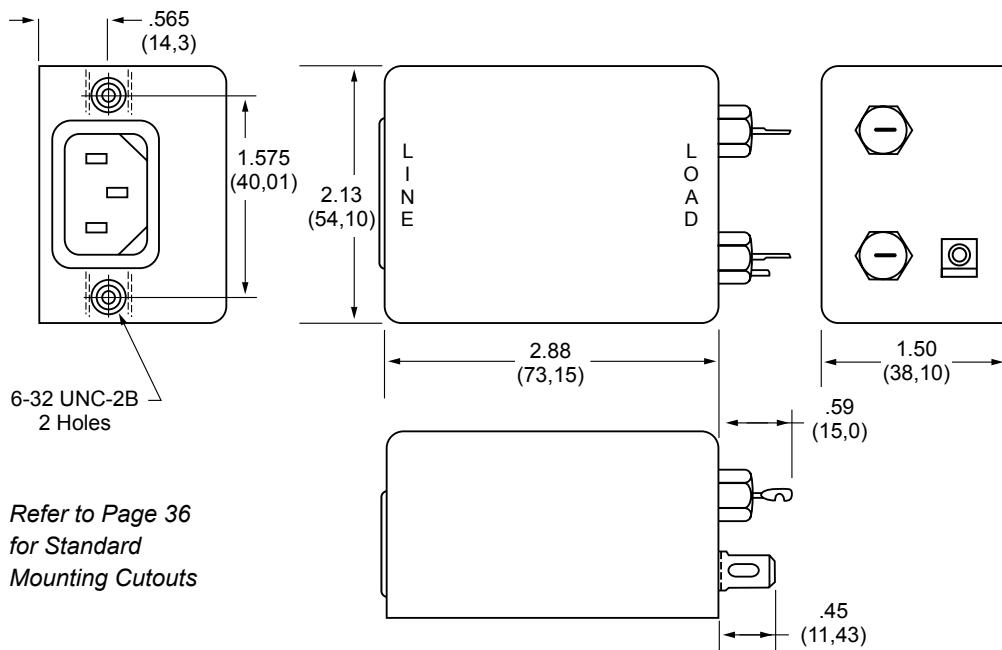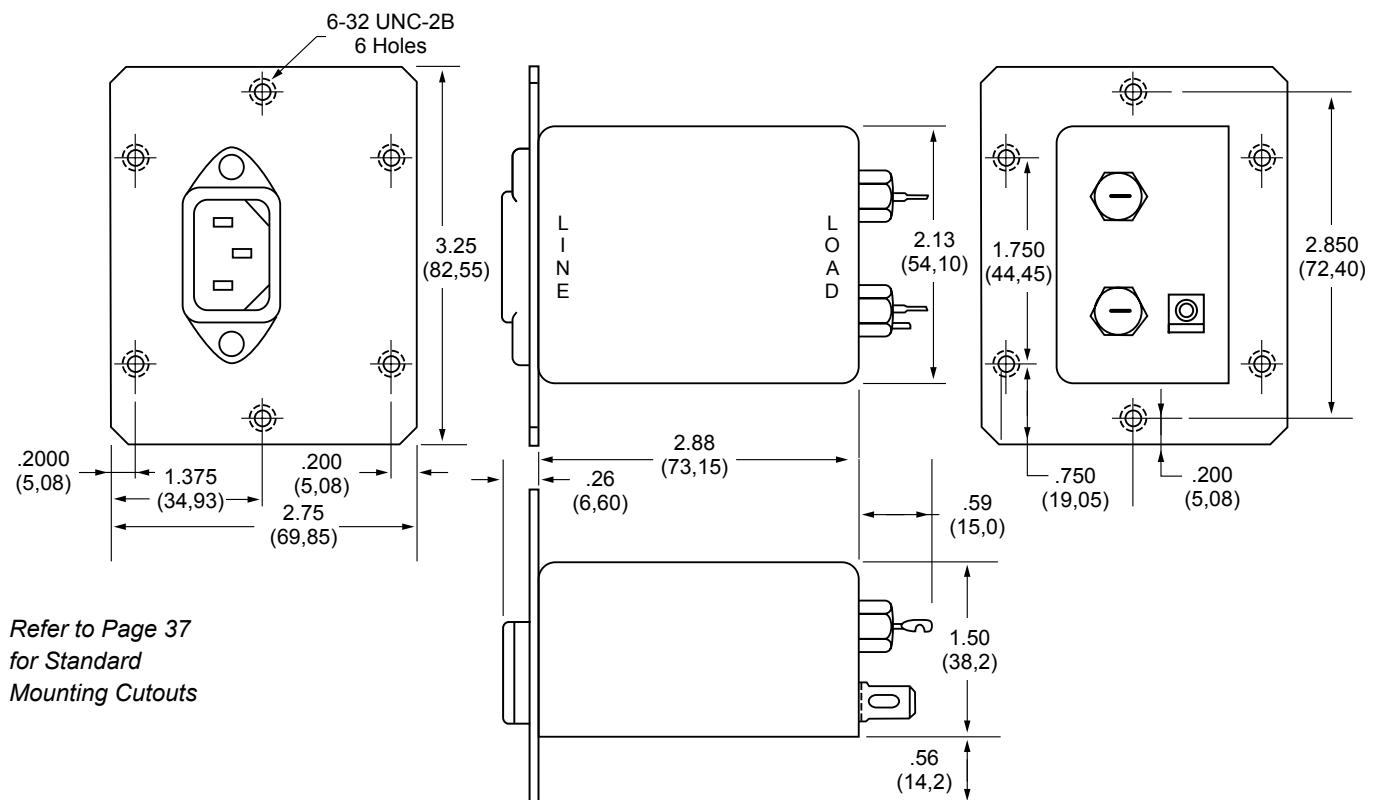**F5600CG** (3 and 6Amp) Dimensions**F5601CG** (3 and 6Amp) Dimensions with attached mounting plate

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F5700 RFI Filters

Wide Band


SINGLE PHASE FILTERS



## Features:

- Ideal for VDE "B" and MIL-STD-461 Switching Power Supply Applications
- Very High Inductance Design with Differential Mode Choke to Provide Improved Performance Below 100KHz
- Wide-Band Insertion Loss >60dB from 10MHz to 1GHz
- Compact, Space-Efficient Package Available in 3 and 6Amp Ratings

## F5700 Simplified Schematic

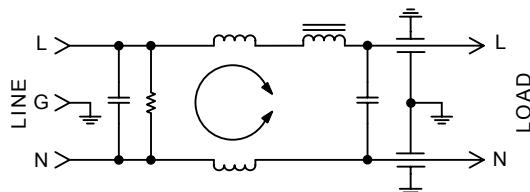

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC  
3A 2A  
6A 4A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1400VDC  
Line to Line 1450VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

C: IEC Receptacle  
G: Wire Wrap/Solder

**Maximum Leakage Current:**


Each Line to Ground	<b>F5700</b>
115VAC, 60Hz:	0.50mA
250VAC, 60Hz:	1.20mA



**Agency Approvals:**



Nominal Current Rating	Part Number	Termination Line/Load
3A	F5700CG03	IEC/ Solder Tab
6A	F5700CG06	IEC/ Solder Tab

## F5700 SERIES TYPICAL COMMON MODE INSERTION LOSS — dB (50 OHM CIRCUIT)

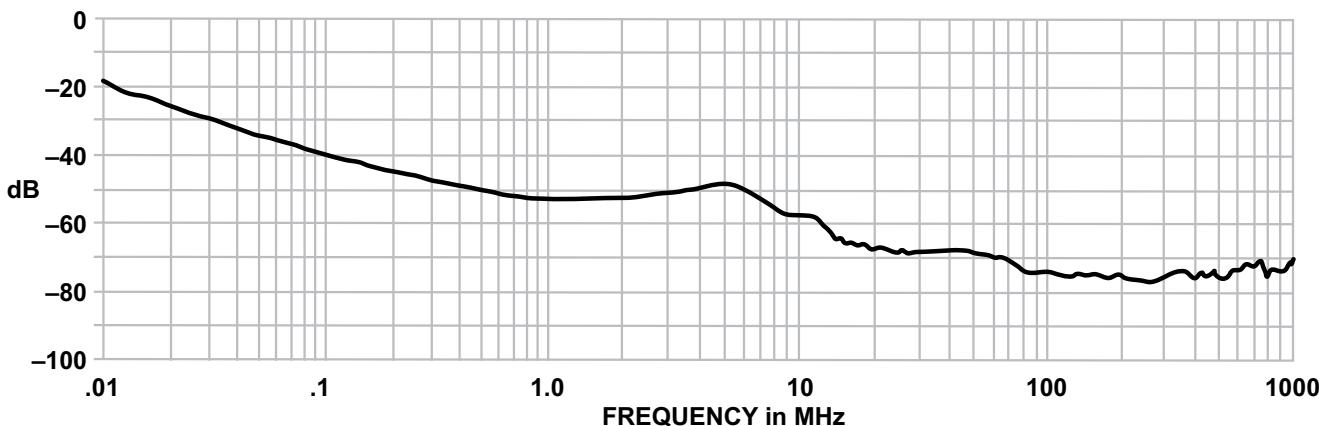

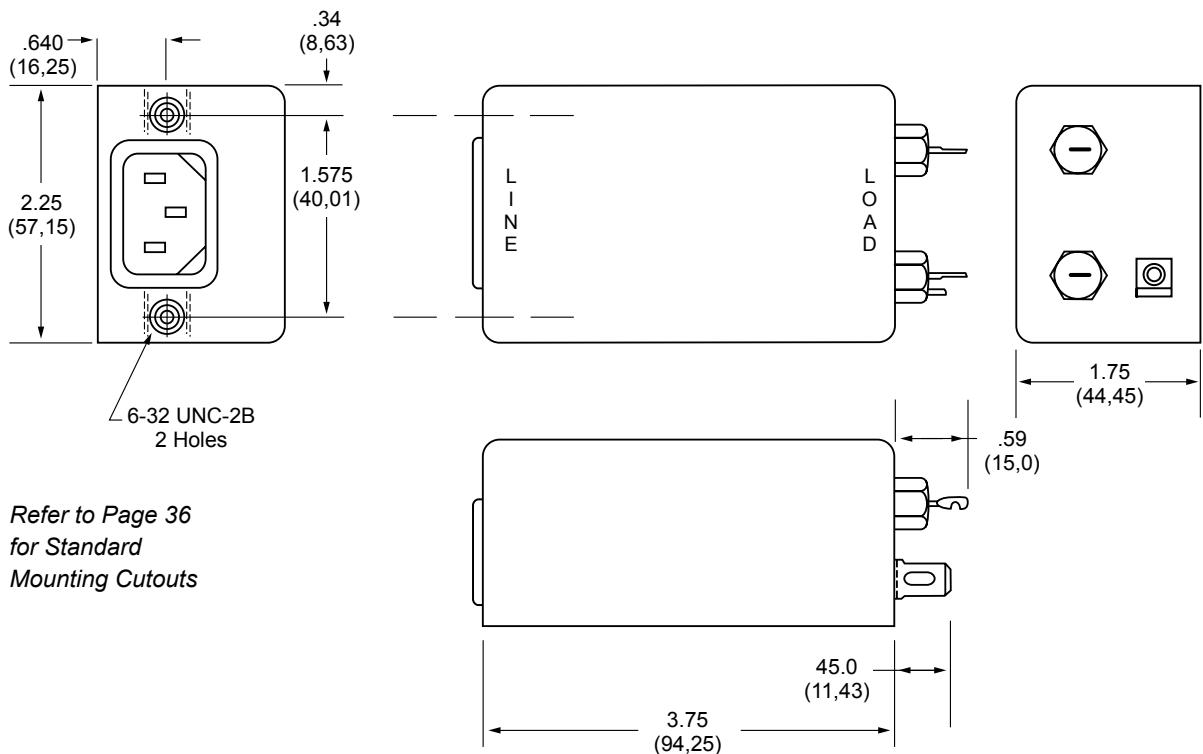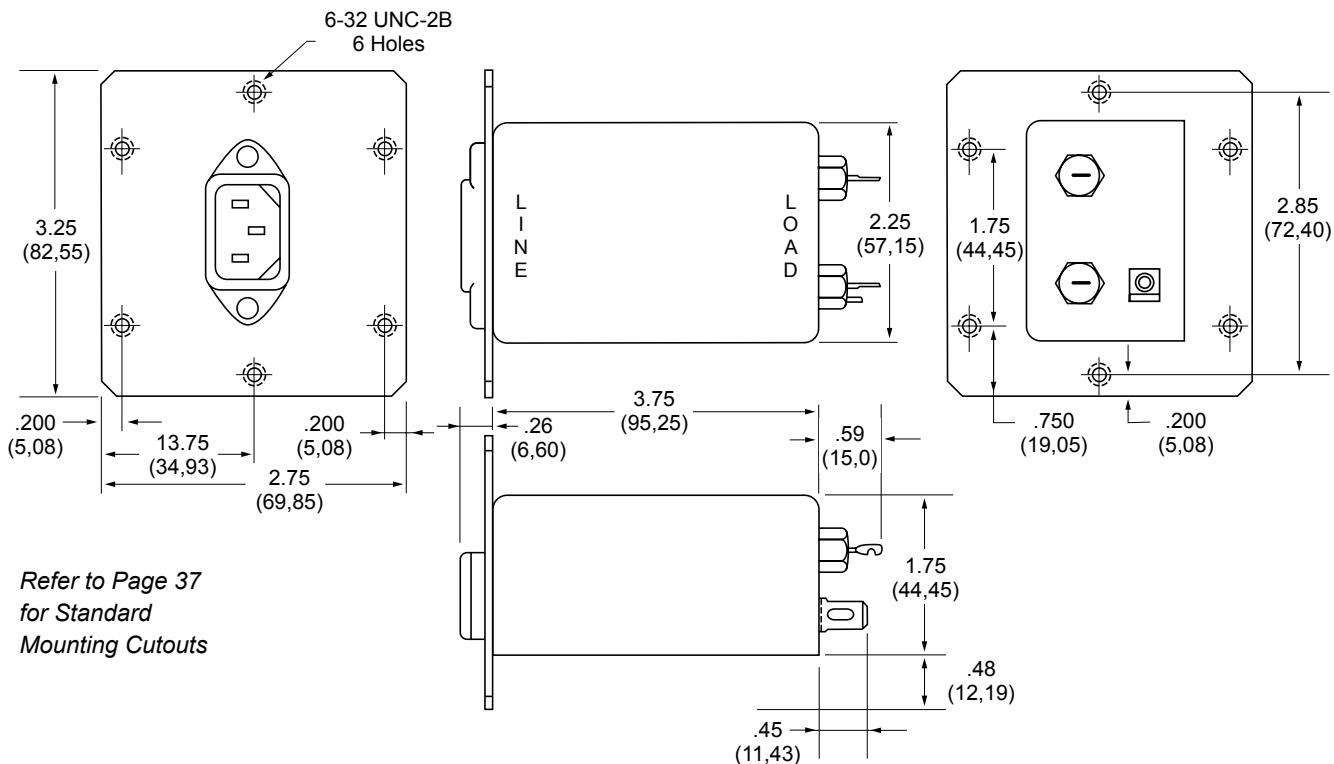**F5700CG** (3 and 6Amp) Dimensions**F5701CG** (3 and 6Amp) Dimensions with attached mounting plate

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F5900 RFI Filters

Wide Band


SINGLE PHASE FILTERS

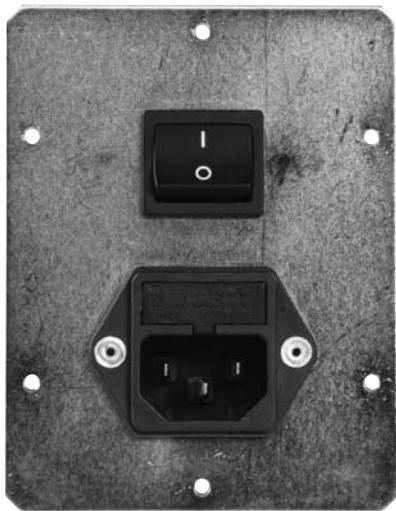

## Features:

- High Performance Filter Designed for Switching Power Supply Emissions
- >70dB Insertion Loss from 200KHz to 1GHz
- Integral Power Switch and 5 x 20mm Fuse Holder
- Available in 3 and 6Amp Versions with Optional Mounting Faceplates

## F5900 Simplified Schematic without Switch

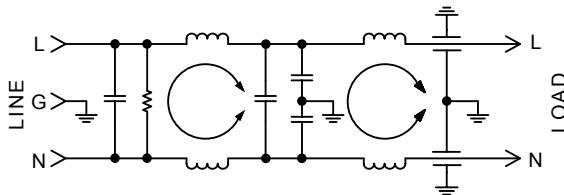

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

<b>Rated Current:</b>	115VAC	250VAC
3A	1.5A	
6A		4A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VDC

Line to Line 1450VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

C: IEC Receptacle

F: Fused IEC

G: Wire Wrap/Solder

J: Switched IEC


## Maximum Leakage Current:

	<b>F5900</b>
Each Line to Ground	
115VAC, 60Hz:	0.50mA
250VAC, 60Hz:	1.20mA


## Agency Approvals:



## F5900 Simplified Schematic with Switch

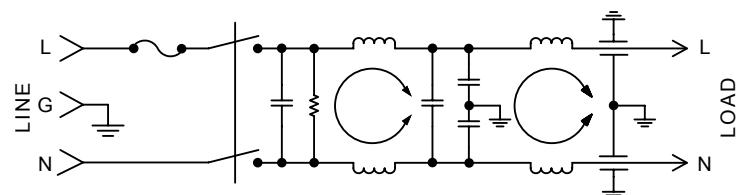


**F5900 SERIES  
TYPICAL COMMON MODE  
INSERTION LOSS — dB  
(50 OHM CIRCUIT)**

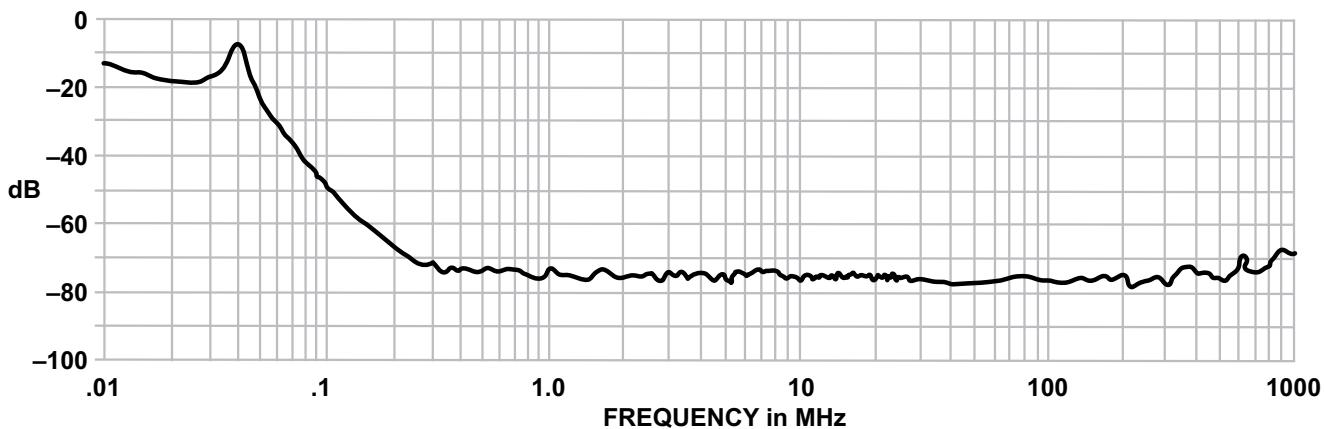


## F5900CG (3 and 6Amp) Dimensions

Refer to Page 37  
for Standard  
Mounting Cutouts

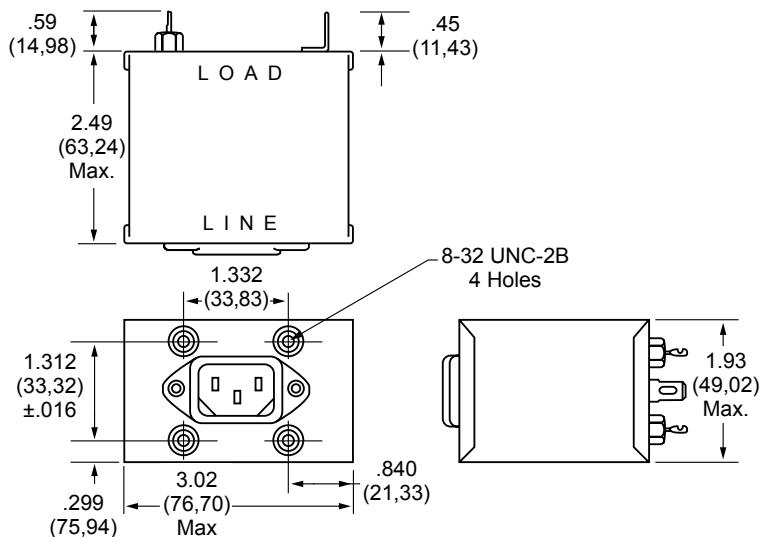

## F5900FG (3 and 6Amp) Dimensions


Refer to Page 37 for Standard Mounting Cutouts

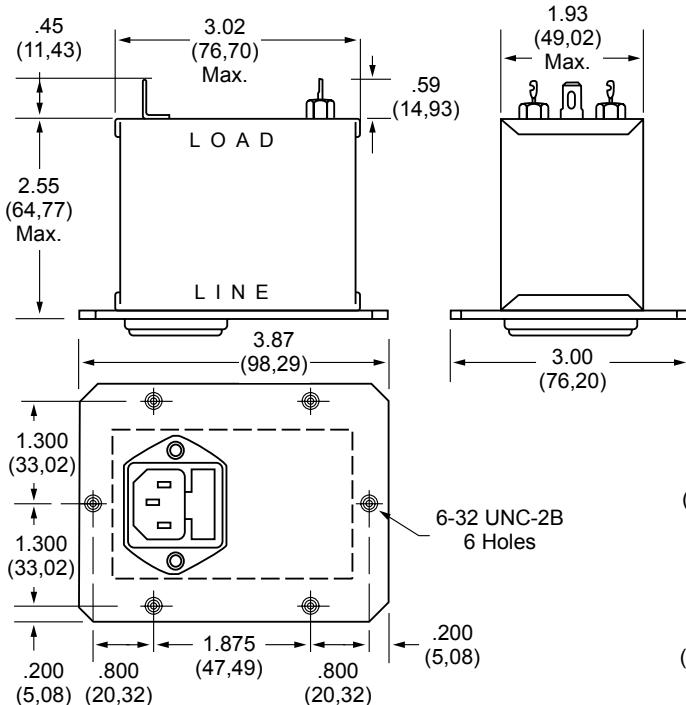

Nominal Current Rating	Part Number	Termination Line/Load
3A	F5900CG03	IEC/Solder Tab
	F5900FG03	Fused IEC/Solder Tab
	F5900JG03	Switched IEC/Solder Tab
6A	F5900CG06	IEC/Solder Tab
	F5900FG06	Fused IEC/Solder Tab
	F5900JG06	Switched IEC/Solder Tab

## F5900JG (3 and 6Amp) Dimensions

Refer to Page 37  
for Standard  
Mounting Cutouts

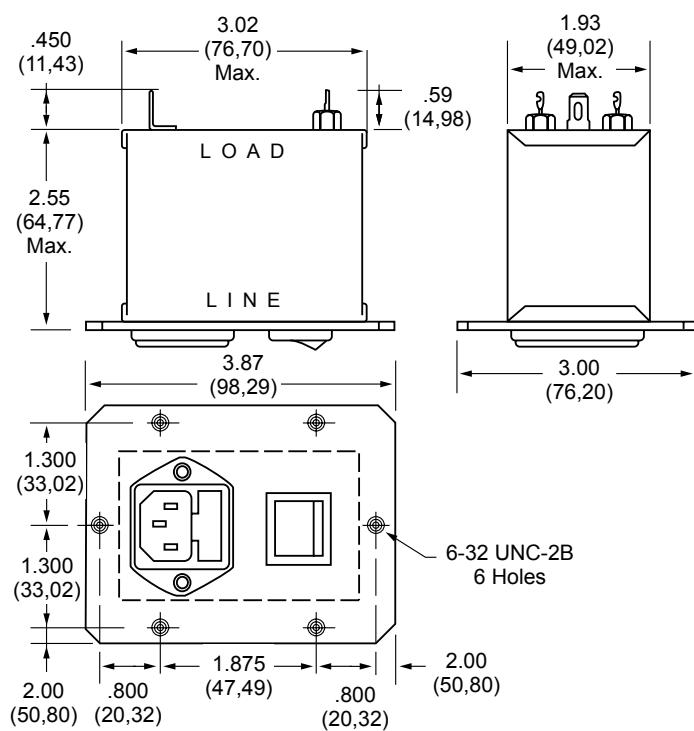

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.


1-800-657-0853

# Standard Mounting Cutouts

## F1200CA, F1300CA, F1400CA, F1500CA, F1600CA, F1700CA

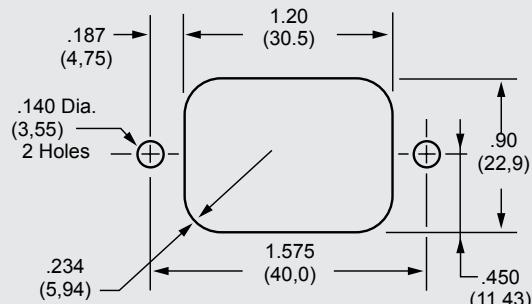

## F1500FA, F1600FA,

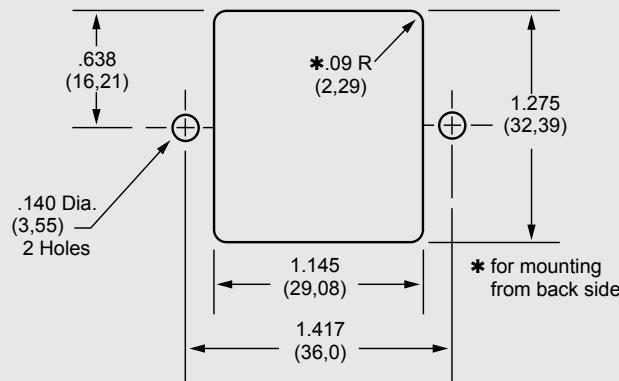


## How to Order

The Curtis part numbering system is made up of four elements. Each element denotes a specific requirement (mechanical or electrical) which, when properly sequenced, fully identifies the required catalog filter. As shown, the first five alpha/numeric characters denote the series type; the sixth character (alpha) denotes the type of line termination; the seventh character (alpha) denotes the type of load termination; the last two characters (numeric) denote the current rating.


Compose your part number as follows: Select the series required, add two alpha character for the line and load termination, followed by two numeric characters for the required current rating. For example, F1100AB06 completely identifies an F1100 series filter with quick connects on line side and wire leads on load side, with a 6-amp rating.

<b>F1100</b>	<b>X</b>	<b>X</b>	<b>X</b>
SERIES			CURRENT RATING
PE = Power Entry			01 = 1 Amp
PM = Medical			03 = 3 Amps
Power Entry			06 = 6 Amps
LINE TERMINATION			10 = 10 Amps
A= Quick Connects			15 = 15 Amps
B= Wire Leads			20 = 20 Amps
C= IEC Connector			30 = 30 Amps
D= Screw Terminals			
(20 & 30 amp only)			A= Quick Connects
F= Fused IEC			B= Wire Leads
P= Printed Circuit Pins			D= Screw Terminals
W= Dual Fused IEC			(20 & 30 amp only)
J= Switched IEC			P= Printed Circuit Pins
			S= Solder Tab


## F1300CP, F1600CP

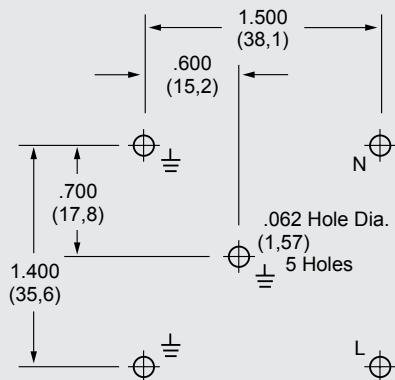


## F5500/5600/5700 SERIES

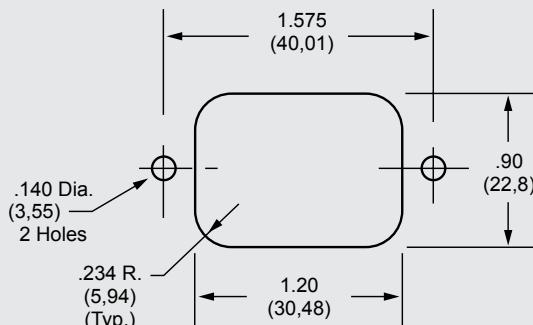


### F5100 SERIES

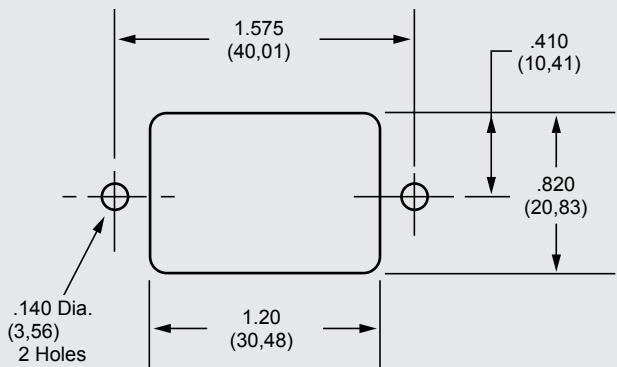


### F5200 SERIES

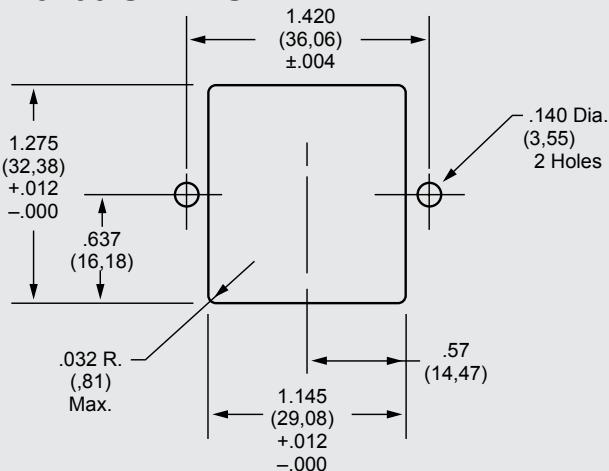


### F5101 SERIES

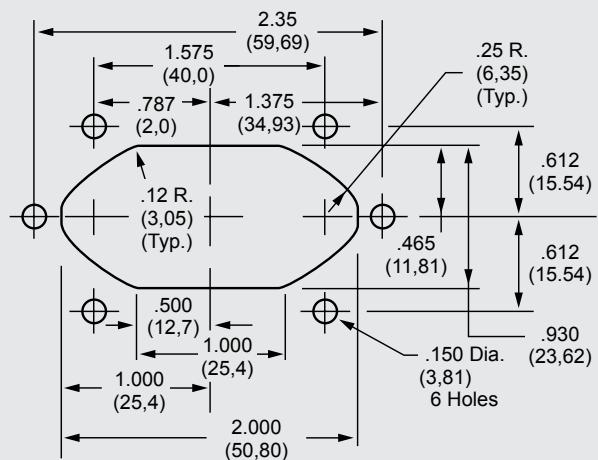

### F5201 SERIES

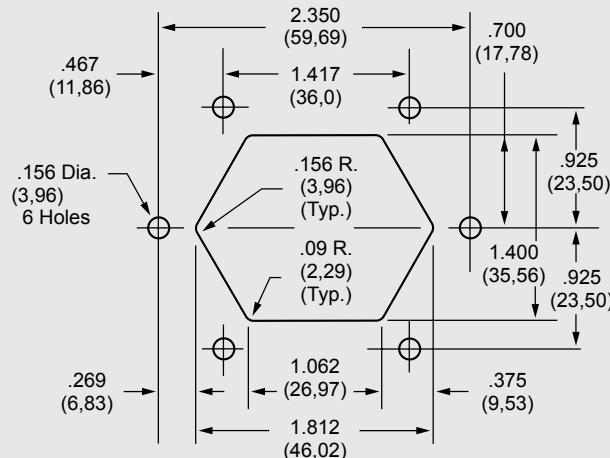

### F5501/5601/5701 SERIES

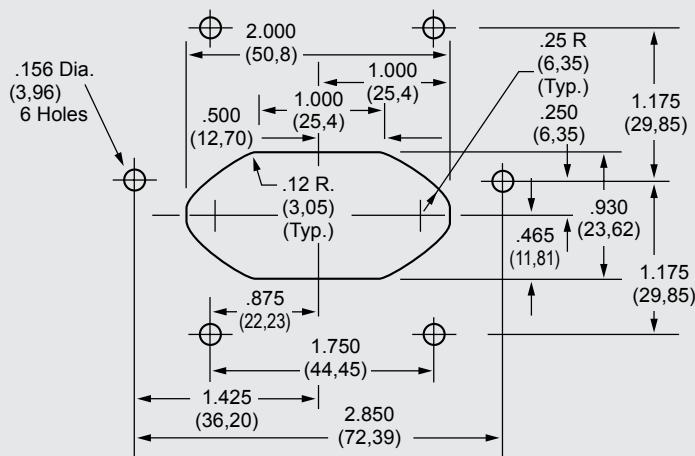

NOTE: Tolerance for all dimensions unless otherwise specified: .XXX three place  $\pm .004$ , .XX two place  $\pm 0.10$

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.


1-800-657-0853

# Standard Mounting Cutouts


**F5900FG**

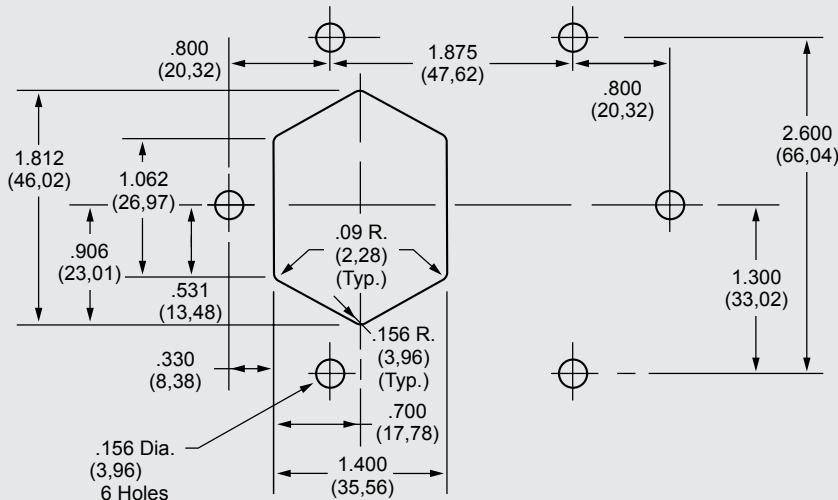

**F5900CG**

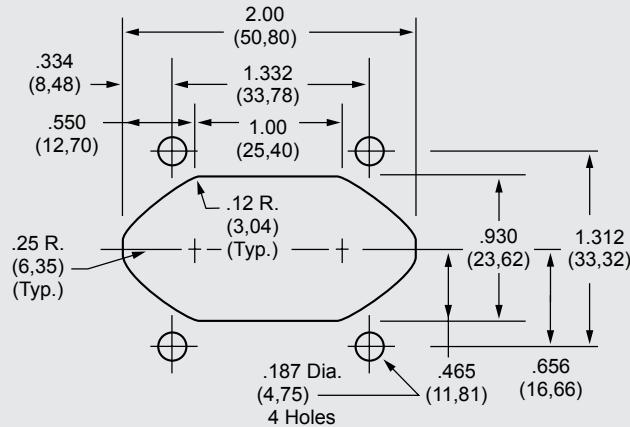

**F5900JG**


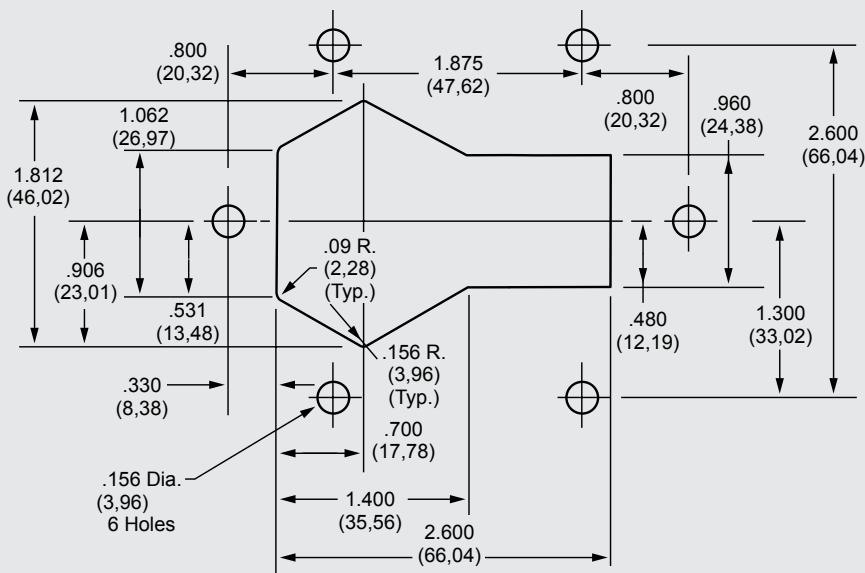


NOTE: Tolerance for all dimensions unless otherwise specified: .XXX three place  $\pm .004$ , .XX two place  $\pm .010$



## **POWER ENTRY MODULES**

### *General Purpose Combination*

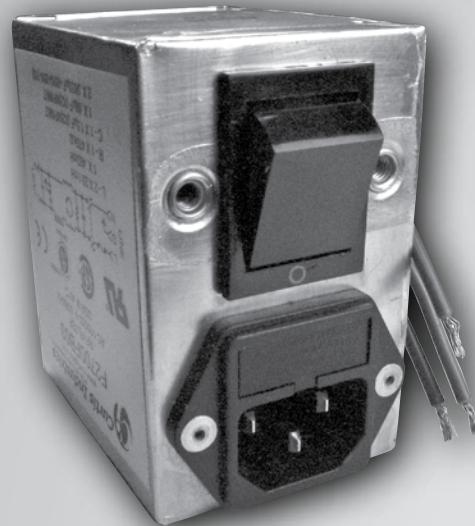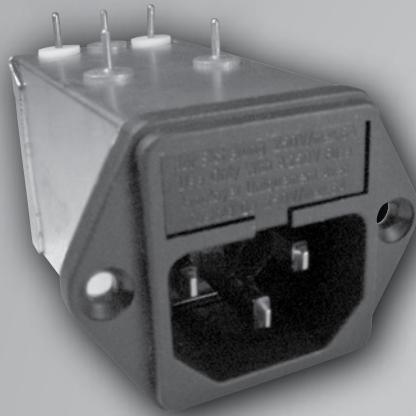

*Curtis Industries*  
A Division of Powers Holdings, Inc.


# F2199/F2200 RFI Filters



## Features:

- General Purpose Filters — Designed for Common Mode Emissions or Susceptibility Applications
- Integral IEC Connector in Space-Efficient Package
- Ideal for Linear Power Supplies in Digital Equipment

## F2100/F2200 Simplified Schematic

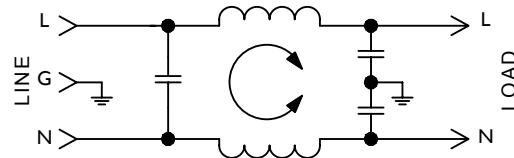



F???????

(6Amp)????

Dimensions

Refer to Page 62

for Standard  
Mounting Cutouts???

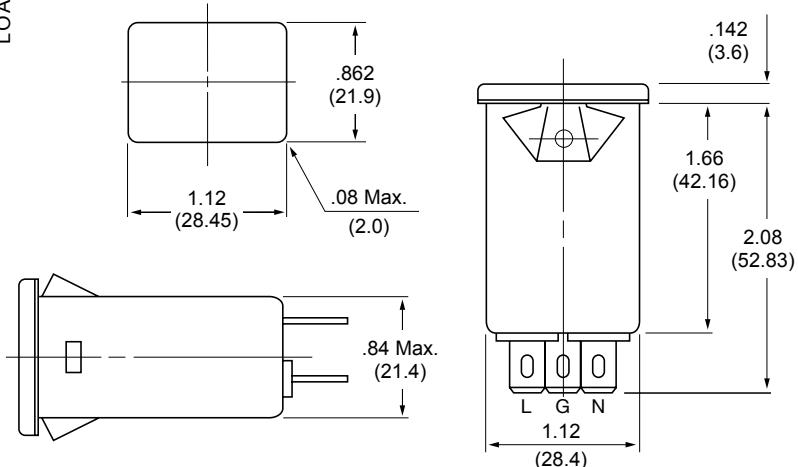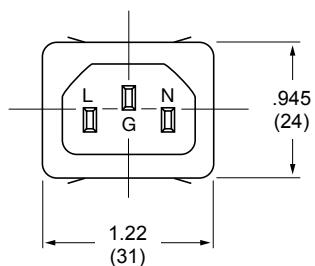

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
1A	F2100CA01 F2200CA01	IEC/QC IEC/QC	Common Differential	22 —	35 2	40 3	46 35	50 40	50 40
3A	F2100CA03 F2200CA03	IEC/QC IEC/QC	Common Differential	15 —	25 2	30 3	45 35	50 40	50 40
6A	F2100CA06 F2200CA06	IEC/QC IEC/QC	Common Differential	10 —	20 2	29 7	43 28	45 46	50 57
10A	F2100CA10	IEC/QC	Common Differential	9 —	17 2	23 7	39 12	45 37	45 60

NOTE: Other combinations of terminals may be specified on special order.


# F2300 RFI Filters



## Features:


- Effective Protection from Pulsed, Intermittent or Continuous RFI for FCC "A" Applications
- High-Performance Low-Leakage Filter in Low Profile Package with Integral IEC Connector
- Increased Inductance and Line-to-Line Capacitance Provide Enhanced Common Mode and Differential Mode Attenuation

## F2300CA Simplified Schematic

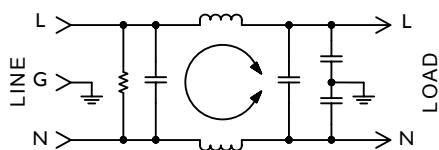

## F2300CA (6Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

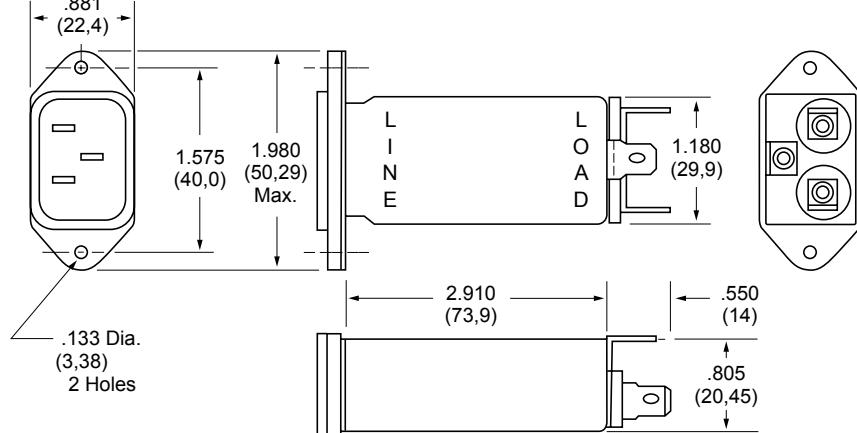

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	Frequency - MHz					
				.15	.50	1.0	5.0	10	30
6A	F2300CA06	IEC/QC	Common Differential	25 12	37 30	45 50	45 65	45 65	45 60

NOTE: Other combinations of terminals may be specified on special order.


Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# F2400/2500 RFI Filters

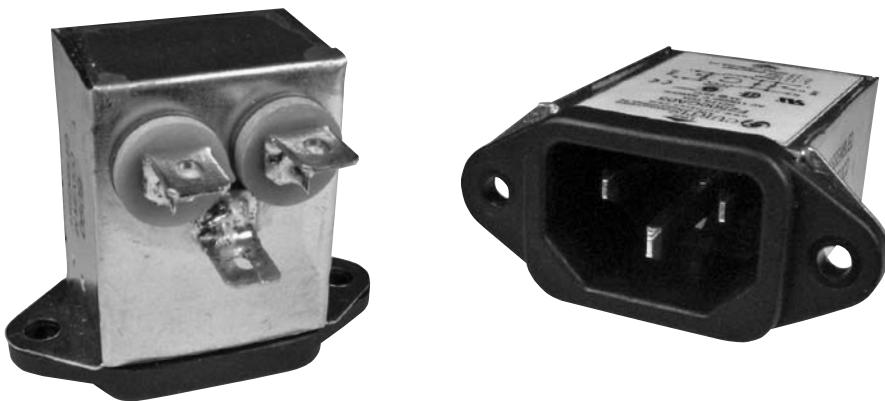

## Features:

- Higher Performance Filters Designed for Common Mode and Differential Mode Applications
- 4X Greater Differential Mode Insertion Loss at 1 MHz than F2100/F2200 Series with No Increase in Physical Size
- Especially Suited for Use with Linear Power Supplies and FCC "A" Applications

## F2400/2500 Simplified Schematic

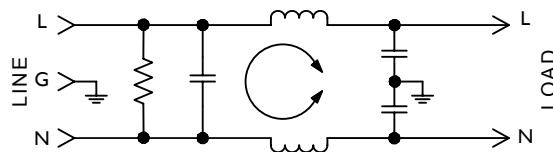

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

Rated Current:	
115VAC	250VAC
3A	1.5A
6A	3A
10A	10A
15A	10A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

- A: QC – Quick Connect
- C: IEC Receptacle

### Maximum Leakage Current:


	F2400/F2500
Each Line to Ground	
115VAC, 60Hz:	0.25mA
250VAC, 50Hz:	0.40mA

### Agency Approvals:




Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F2400CA03 F2500CA03	IEC/QC IEC/QC	Common Differential	22 8	35 18	40 24	46 40	50 50	50 40
6A	F2400CA06 F2500CA06	IEC/QC IEC/QC	Common Differential	15 8	24 18	31 24	42 40	45 50	50 40
10/15A	F2400CA10 F2400CA15	IEC/QC IEC/QC	Common Differential	4 2	10 8	13 15	28 30	35 35	40 35

NOTE: Other combinations of terminals may be specified on special order.

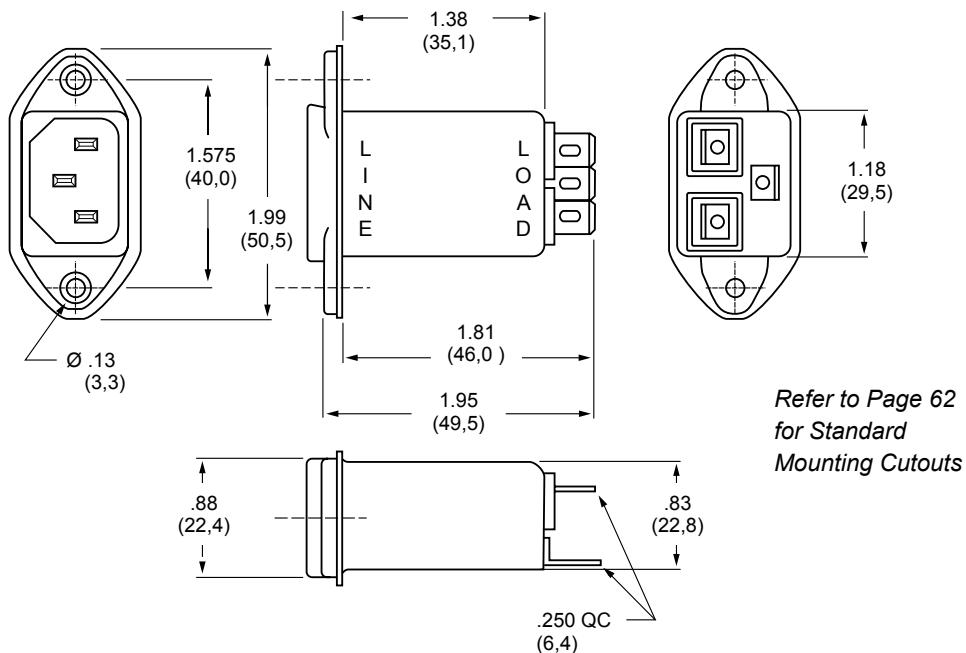**F2400CA** (3, 6, 10 and 15Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

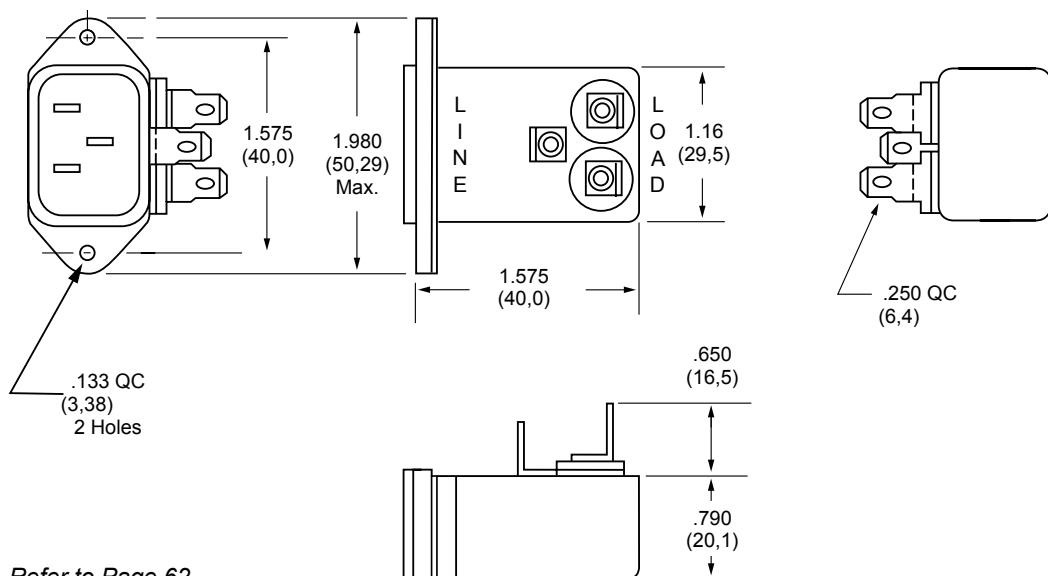**F2500CA** (3 and 6Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

Dimensions are in inches and millimeters  
unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F2600 RFI Filters



## Features:

- General Purpose "L-Type" Circuit Effective in Reducing Both Incoming and Outgoing Powerline Noise Levels in FCC "A" Applications
- Integral 5 X 20mm Single or Dual Fused IEC Connector
- Optional SST Switched IEC Connector
- All Series Available in Labor-Saving PC Mounted Case Style

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

<b>Rated Current:</b>	115VAC	250VAC
	3A	3A
	6A	6A

**Current Overload:** 6X for 8 seconds

### Hi-Pot Test (1 min):

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max at rated current

**Humidity Range:** 0% to 95% R.H.

### Termination:

- A: QC – Quick Connect
- F: Fused IEC
- J: Switched IEC
- P: PC – P.C. Board
- W: Dual Fused IEC


### Maximum Leakage Current:

	<b>F2600</b>
Each Line to Ground	0.25mA
115VAC, 60Hz:	0.40mA

### Agency Approvals:









## F2600F Simplified Schematic

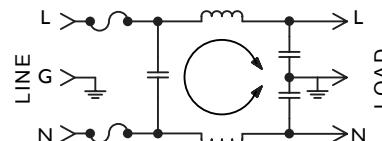

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F2600FA03 F2600FP03	Fused IEC/QC Fused IEC/PC	Common Differential	21 8	35 18	41 24	50 40	50 50	50 40
6A	F2600FA06 F2600FP06	Fused IEC/QC Fused IEC/PC	Common Differential	18 8	34 18	41 24	45 40	45 50	45 50
3A	F2600WA03 F2600WP03	Dual Fused IEC/QC Dual Fused IEC/PC	Common Differential	21 8	35 18	41 24	45 40	45 50	50 40
6A	F2600WA06 F2600WP06	Dual Fused IEC/QC Dual Fused IEC/PC	Common Differential	18 8	34 18	41 24	40 40	40 50	45 50
3A	F2600JA03 F2600JP03	Switched IEC/QC Switched IEC/PC	Common Differential	21 8	35 18	41 24	45 40	45 50	50 40
6A	F2600JA06 F2600JP06	Switched IEC/QC Switched IEC/PC	Common Differential	18 8	34 18	41 24	40 40	40 50	45 50

NOTE: Other combinations of terminals may be specified on special order.

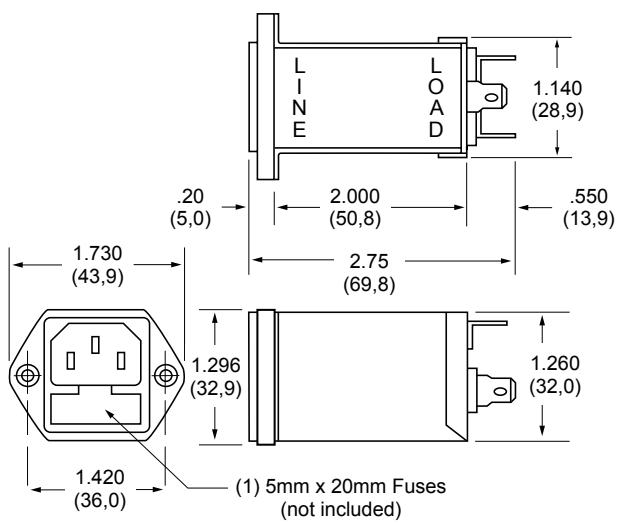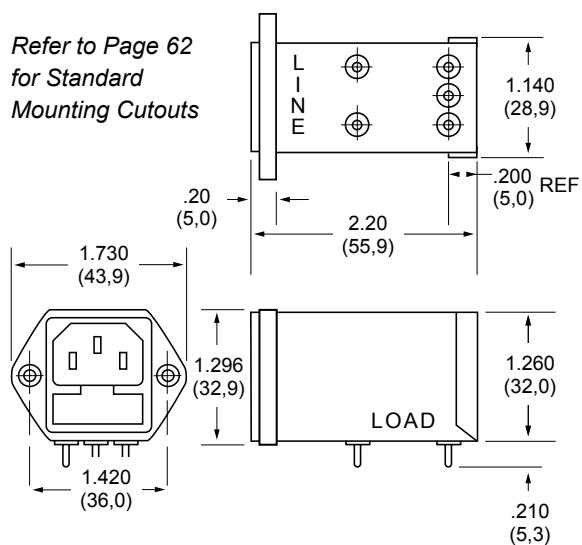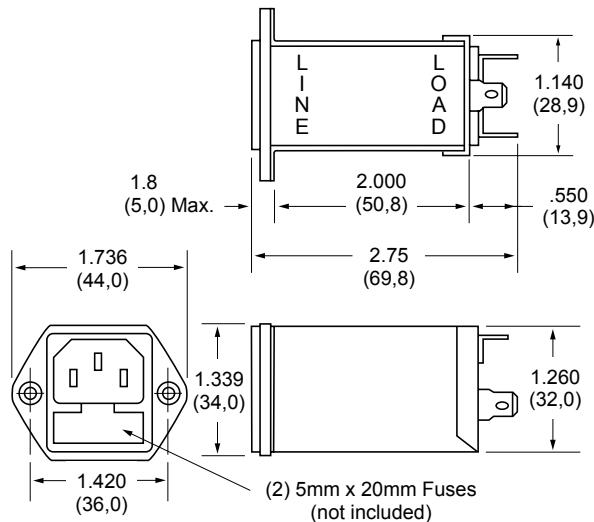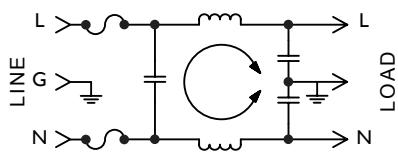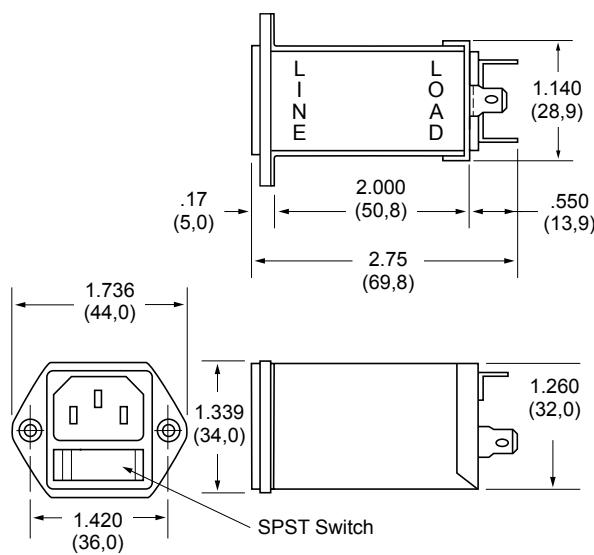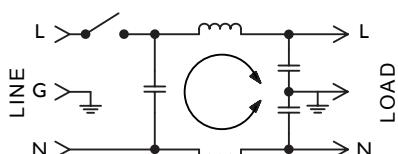

**F2600FA** (3 and 6Amp) Dimensions**F2600FP** (3 and 6Amp) Dimensions**F2600WA** (3 and 6Amp) Dimensions**F2600W Simplified Schematic****F2600JA** (3 and 6Amp) Dimensions**F2600J Simplified Schematic**

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F2700 RFI Filters



## Features:

- Designed for FCC "B" and VDE "B" Switching Power Supply Applications
- Very High Inductance Design with Differential Mode Choke to Provide Improved Performance Below 100KHz
- Compact, Space-Efficient Package Available in 3 and 6Amp Ratings
- Also Available with Integral Fused IEC Connector and "ON/OFF" Power Switch

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

<b>Rated Current:</b>	115VAC	250VAC
	3A	2A
	6A	4A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC

Line to Line 1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

- A: QC – Quick Connect
- B: Wire
- C: IEC Receptacle
- F: Fused IEC


**Maximum Leakage Current:**

Each Line to Ground	<b>F2700</b>
115VAC, 60Hz:	0.25mA
250VAC, 50Hz:	0.40mA


**Agency Approvals:**



## F2700 Without Switch Simplified Schematic



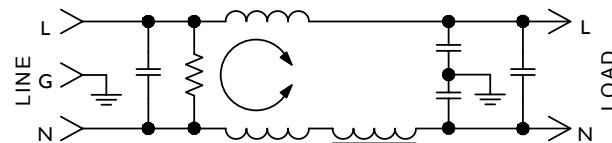


## F2700 Without Switch Simplified Schematic (3Amp Only)

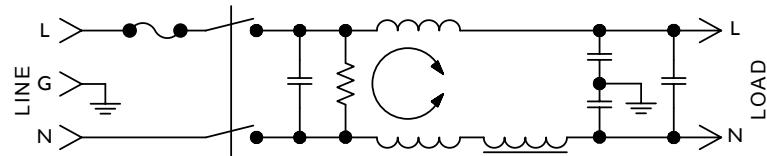


Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)									
			MODE	Frequency - MHz								
3A	F2700AA03	QC/QC		Common Differential	20	27	36	45	42	42	42	40
	F2700CA03 F2700FB03	IEC/QC Fused IEC/Wire		Common Differential	20	27	36	45	42	42	42	40
6A	F2700AA06 F2700CA06	QC/QC IEC/QC	Common Differential	10	18	28	39	42	45	45	45	45
				5	20	48	70	70	70	70	70	65


NOTE: Other combinations of terminals may be specified on special order.

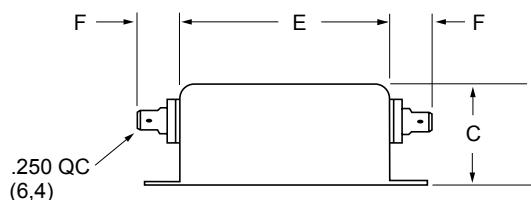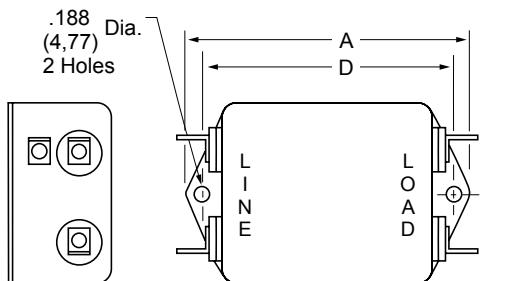**F2700AA** (3 and 6Amp) Dimensions


Amps	A	B	C	D	E	F
3A	3.315 (84.2)	2.000 (50.8)	1.500 (38.1)	2.940 (74.7)	2.500 (63.5)	.550 (14.0)
6A	4.440 (112.8)	2.250 (57.2)	1.750 (44.5)	4.063 (103.2)	3.620 (91.9)	.550 (14.0)

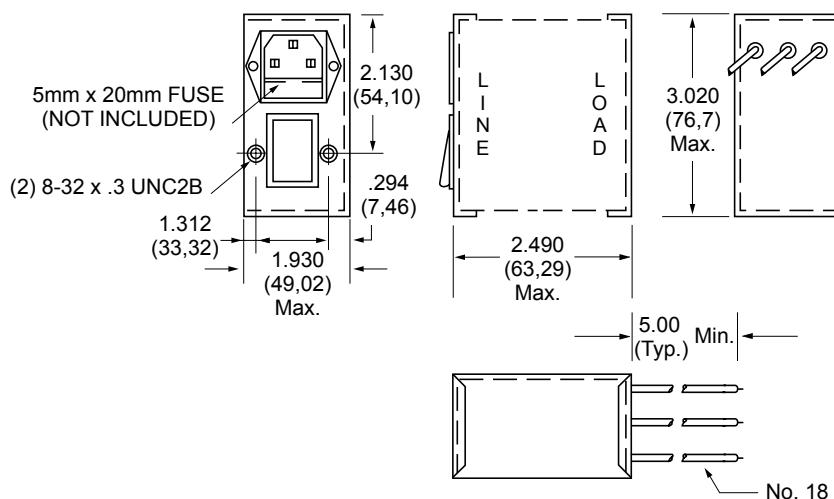**F2700FB03** (3Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

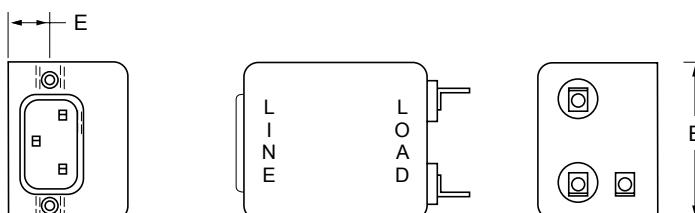**F2700CA** (3 and 6Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

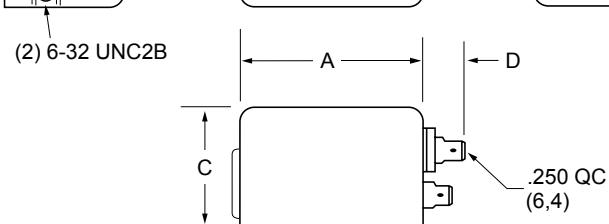

Amps	A	B	C	D	E
3A	2.880 (73.2)	2.125 (54.0)	1.719 (43.6)	.550 (14.0)	.575 (14.6)
6A	3.750 (95.2)	2.250 (57.1)	1.750 (44.4)	.550 (14.0)	.640 (16.29)

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# PE7/PE8/PE8 Series



## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC  
3A 3A  
6A 6A

**Current Overload:** 6X for 8 Seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC  
Line to Line 1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at Rated Current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

- IEC Receptacle
- Wire Wrap/Solder

**Maximum Leakage Current:**

Each Line to Ground	<b>PE7, PE 8, PE9</b>
115VAC, 60Hz:	0.25mA
250VAC, 50Hz:	0.40mA

**Voltage Select Card:** Installed in 120VAC position unless otherwise specified

**Agency Approvals:**




**Refer to Page 62 for Ordering Instructions**

## Features:


- RFI Filter Module Combines IEC Connector, Fusing, and Voltage Select Features in One Unit
- PE7 Series Filters Provide 20% More Differential Mode Attenuation Than Comparable Units
- Accepts Either U.S. or European Standard Fuse Sizes

## PE7 Series Simplified Schematic

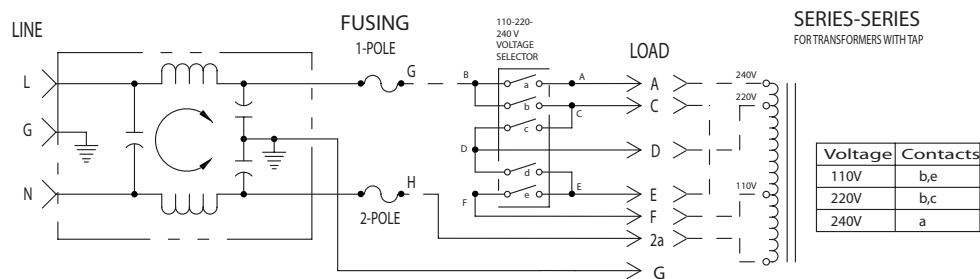


Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	PE7XXX03 PE8XXX03 PE9XXX03	IEC/Solder Tabs	Common Differential	18 8	24 18	30 24	45 46	45 50	50 40
6A	PE7XXX06 PE8XXX06 PE9XXX06	IEC/Solder Tabs	Common Differential	10 8	19 18	24 24	39 39	44 40	50 40




## PE7 Series Simplified Schematic

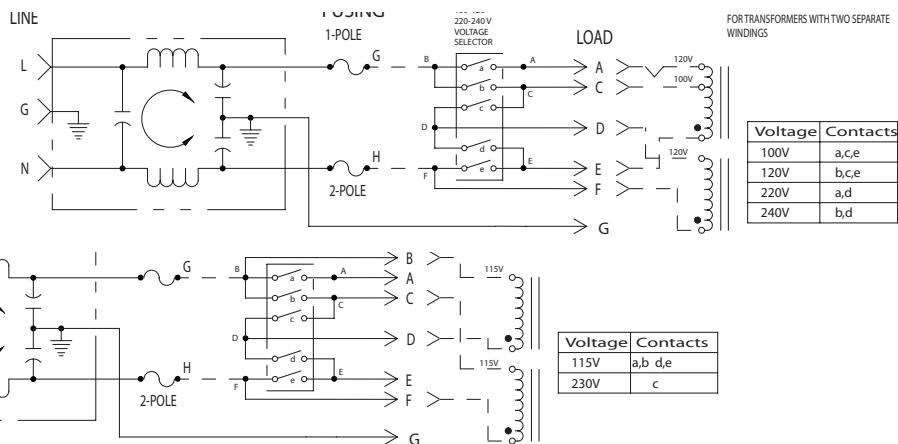

## PE8 Series Simplified Schematic

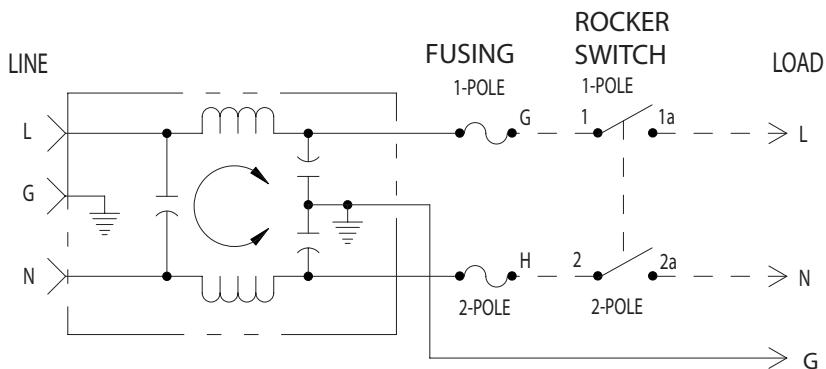

## PE9 Series Simplified Schematic

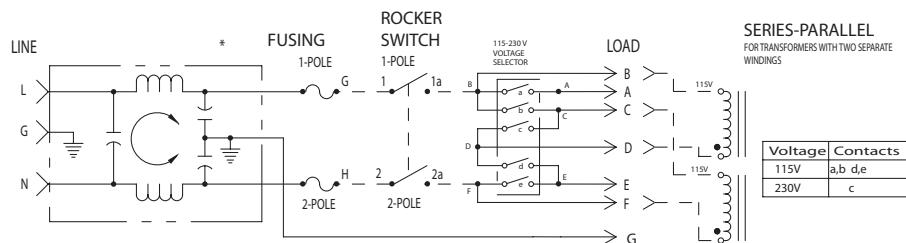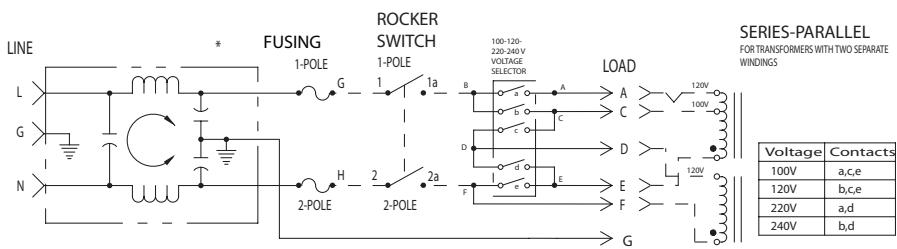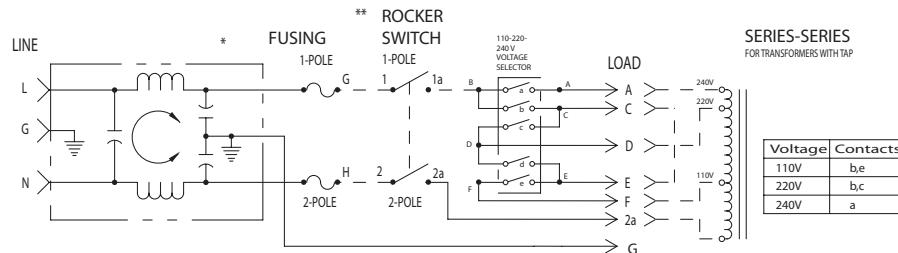

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# PE7/PE8/PE8 Series *(continued)*

## Combination

## POWER ENTRY MODULES


### PE7/PE8 Snap-Mount Series (3 and 6Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

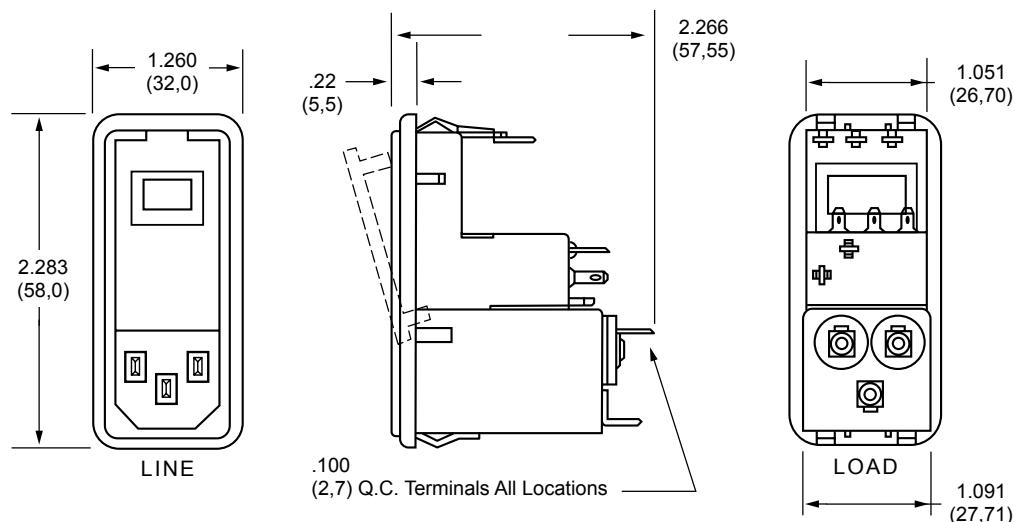


### PE7/PE8 Screw-Mount Series (3 and 6Amp) Dimensions

Refer to Page 62  
for Standard  
Mounting Cutouts

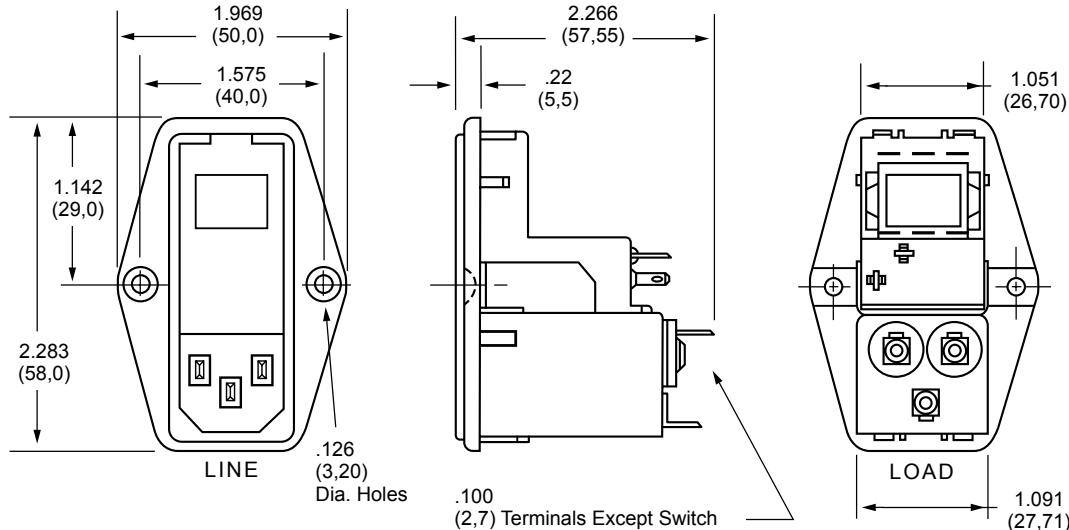


### PE9 (3 and 6Amp) Dimensions

Refer to Standard  
Mounting Cutouts  
Below

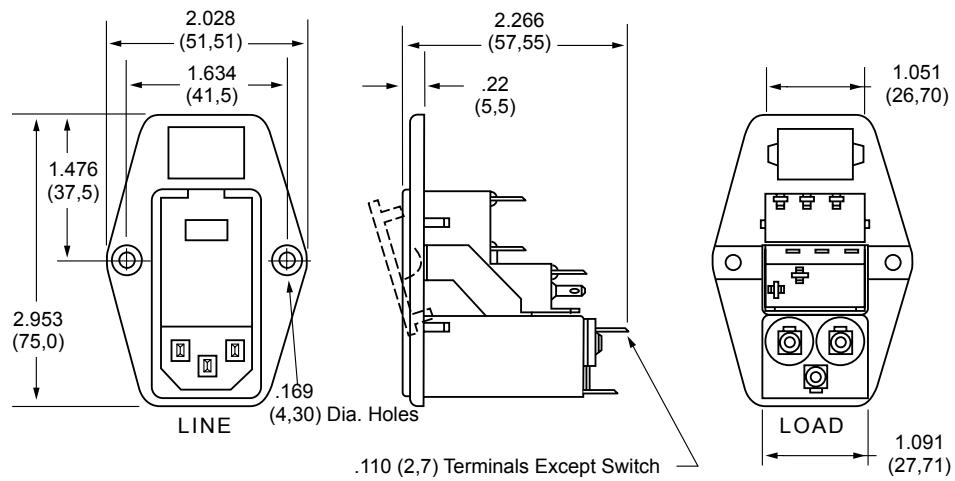

## How to Order

**PE7**  
**PE8**  
**PE9**

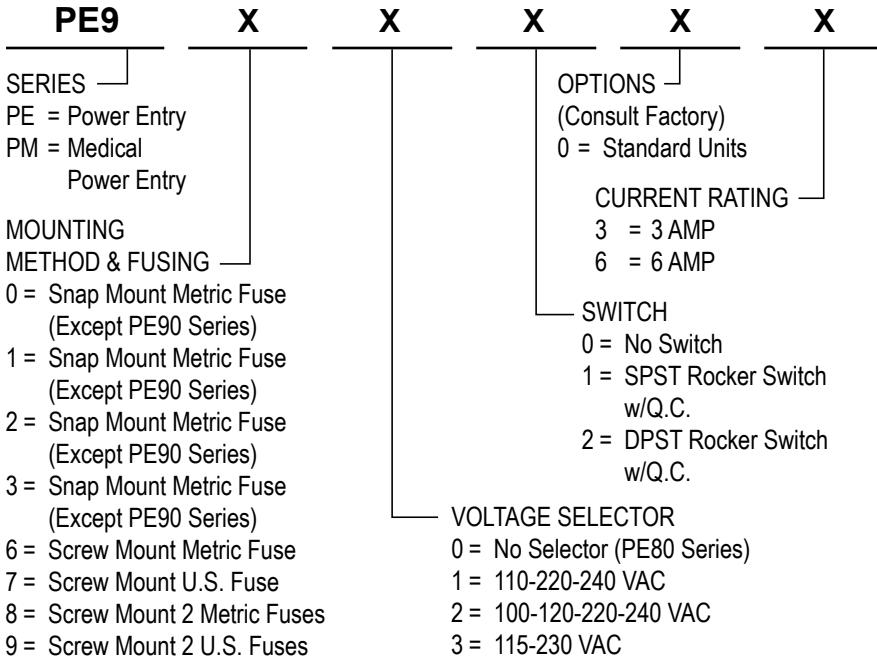

## INSTALLATION INSTRUCTION IMPORTANT – CHANGING FUSE/VOLTAGE




### PE7/PE8/PE9

To change fuse, remove power cord and open the front cover on the module. Remove fuse holder and replace fuse. Reinsert fuse holder and close cover. To change the operating voltage on the PE7 and PE9 Series, remove the power cord and open front cover. Rotate voltage select wheel until desired voltage appears in window of cover.

- Filter shipped without fuse.

Always use caution when selecting and changing fuses and voltage requirements. Curtis Industries is not responsible for malfunction due to improper installation/selection of fuse and/or voltage select.

## Standard Mounting Cutouts

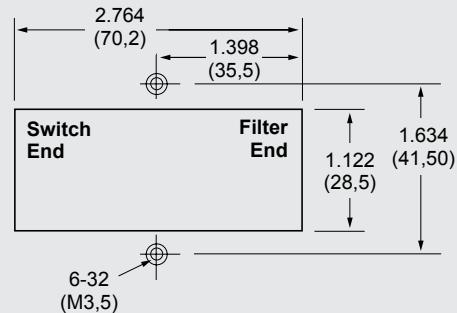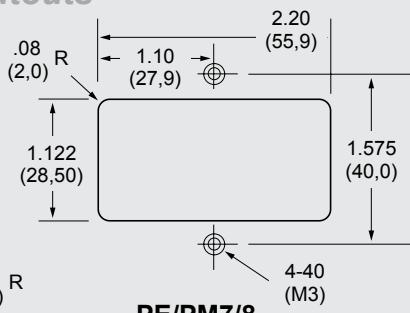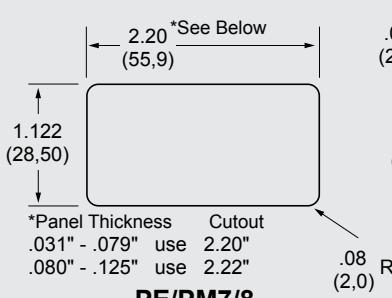

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853


# PE1 Series




## Features:

- RFI Filter Module Combines IEC Connector, Fusing, Optional Voltage Select and On/Off Switch into a Single, Space-Efficient Assembly
- Enhanced Low Frequency Response with No Resonant Peaks
- Fully Shielded for Radiative Noise Control
- Accepts Either U.S. or European Standard Fuse Sizes. Dual or Single Power Line Fusing

**PE1 Series Simplified Schematic without Voltage Selector**

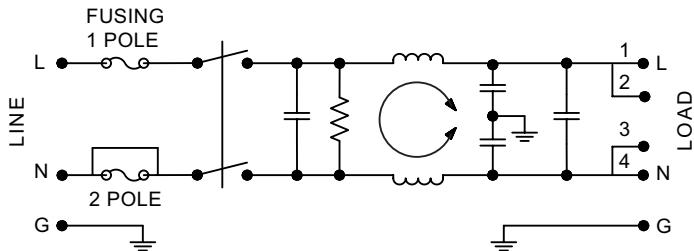

**PE1 Series Simplified Schematic with Voltage Selector**

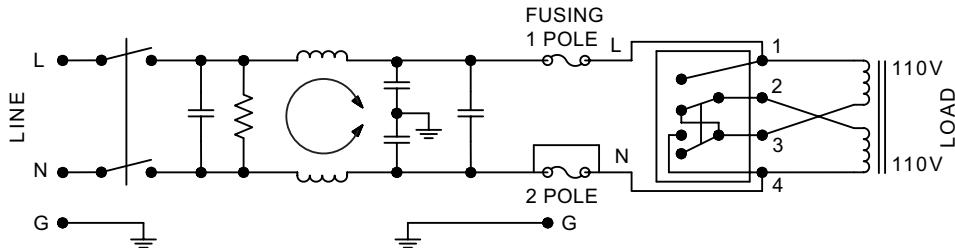


Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)								
			MODE	.05	.15	.50	.10	5.0	10	30	
10A	PE1XXX10	IEC/QC	Common Differential	10 10	20 20	30 30	38 35	45 55	50 60	50 55	
	PE1XXXP0	IEC/QC	Common Differential	13 10	24 20	33 30	38 35	48 65	54 65	54 55	

NOTE: Other combinations of terminals may be specified on special order.

**PE1**  
(10Amp)  
Dimensions

Refer to Standard  
Mounting Cutouts on  
Page 62

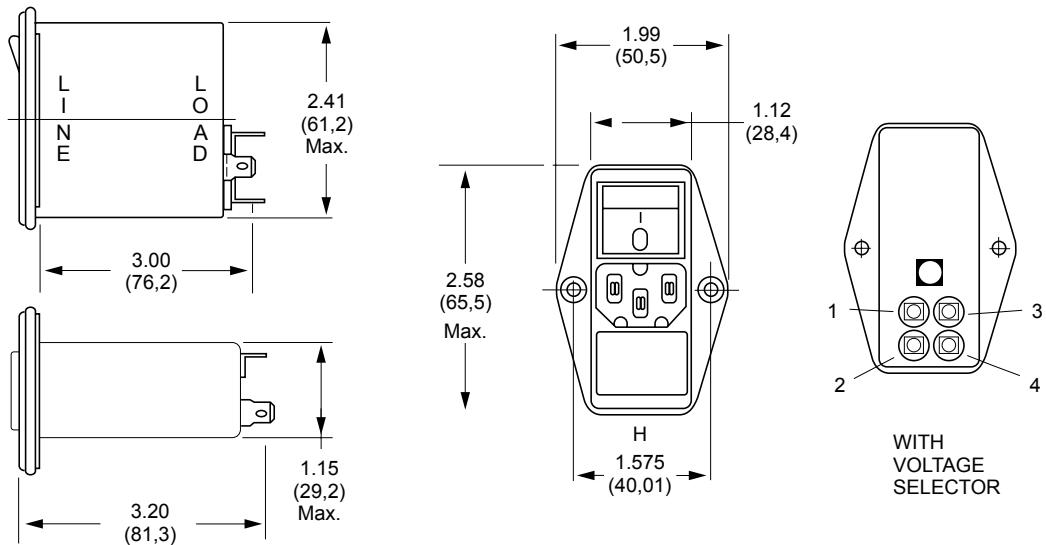

**How to Order**

PE1	X	X	X	X	0
SERIES					
PE = Power Entry					
PM = Medical					
Power Entry					
MOUNTING					
METHOD & FUSING					
6 = Screw Mount Metric or U.S. Fuse*					
8 = Screw Mount 2 Metric or U.S. Fuses					
*U.S. Fuse not available without					
voltage selector					
VOLTAGE SELECTOR					
0 = No Selector					
3 = 115-230 VAC					

**INSTALLATION INSTRUCTION  
IMPORTANT – CHANGING  
FUSE/VOLTAGE**

**PE1**

To change fuse, remove power cord. Remove voltage selector and replace fuse. Reinsert fuse holder. To change the operating voltage on the PE1 Series, remove the power cord and rotate fuse holder block until desired voltage aligns with the mark on the module housing.


- Filter shipped without fuse.

Always use caution when selecting and changing fuses and voltage requirements. Curtis Industries is not responsible for malfunction due to improper installation/selection of fuse and/or voltage select.


# Standard Mounting Cutouts

Should the  
F220CA be  
omitted?


## F2400CA, F3100CA, F3400CA

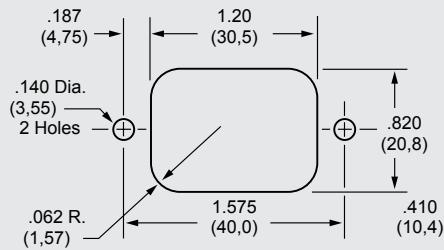


## F2200CA, F2300CA, F2500CA, F2700CA, F3200CA, F3500CA

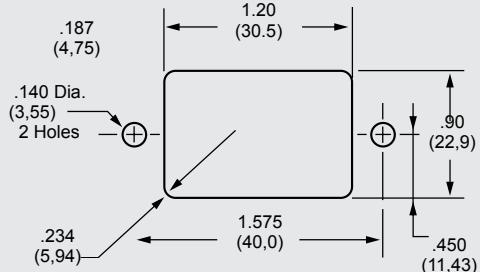


## F2600FP, F3300FP

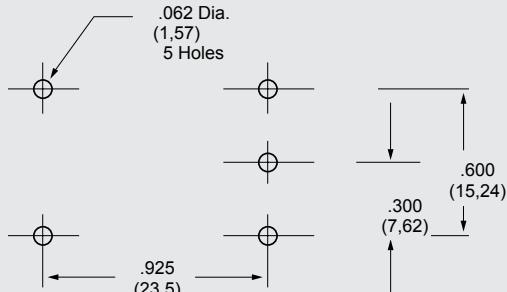


## F2600, F3300

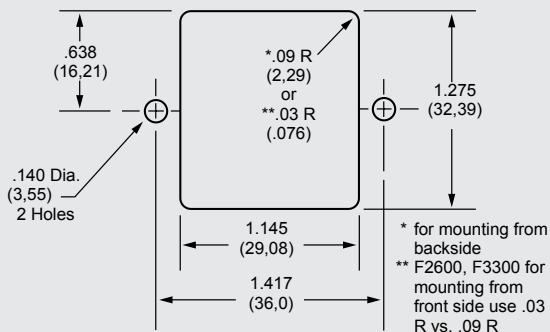

## F2700FB

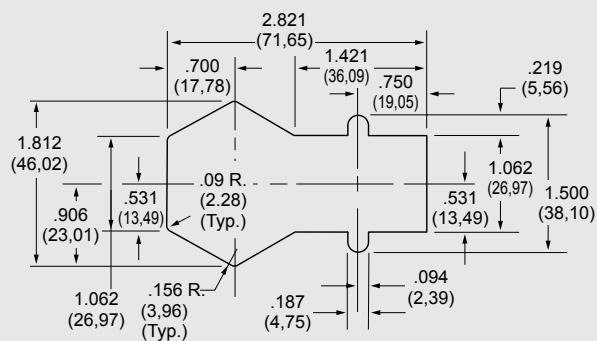


## THREE-PHASE FILTERS

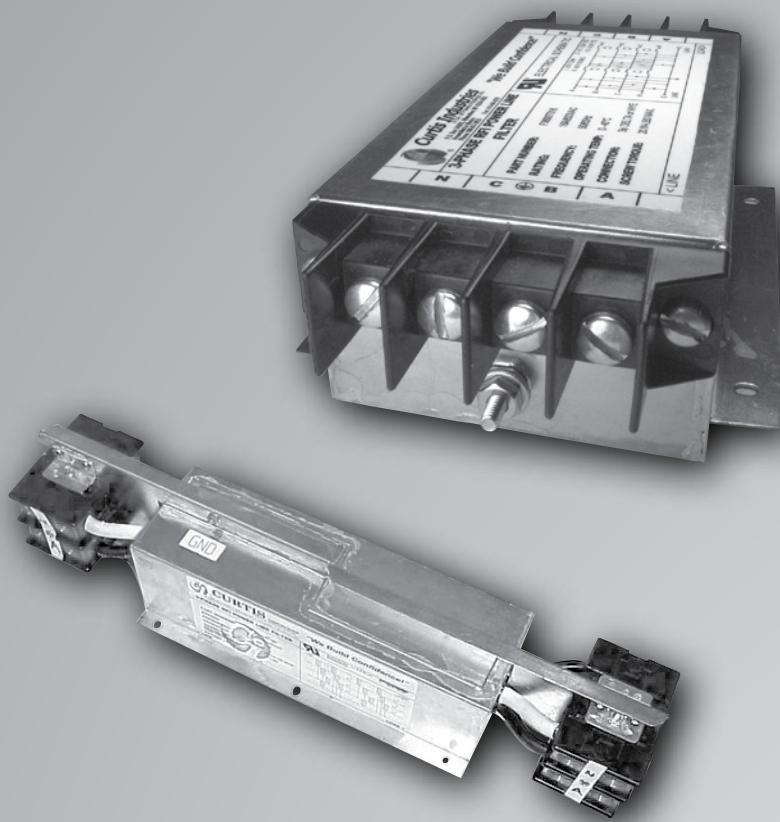

*Curtis Industries*  
A Division of Powers Holdings, Inc.

# Series F3480/F3600

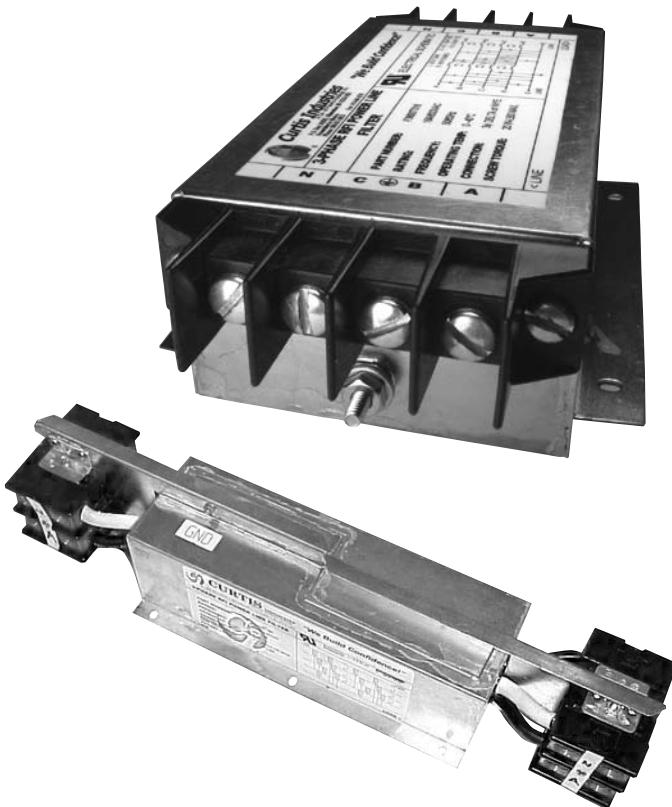

Designed to attenuate conducted interference in a small package providing excellent insertion loss, the F3480/F3600 series filters will provide effective EMC solutions up to 600A at 600VAC and power applications up to 360kVA. With effective noise suppression in the critical 150kHz-30MHz range, this advanced 2-stage filter line will support both Delta and Wye connected loads. Curtis three phase filters are designed to provide EMC solutions in many applications such as:

- Motor
- Motor Control Centers
- Facility Filters
- Uninterruptible Power Supplies
- Power Conditioning Units
- Laser Welders
- Automated Test Equipment
- Robotics
- CNC Machinery
- Elevators
- Industrial Ovens

## Specifications:

**Rated Voltage:** 480 VAC - 50/60 Hz  
600 VAC - 50/60 Hz

**Rated Current:** 480 VAC - 9A to 608A  
600 VAC - 8A to 600A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):** **480VAC** **600VAC**  
Line to Ground 2210 VDC 3150 VDC  
Line to Line 2780 VDC 3150 VDC

**Insulation Resistance:** 1000 MΩ min. at 250 VDC

**Ambient Temperature:** 0°C to 40°C (32°F to 104°F)

**Humidity Range:** 0% to 95% R.H.

### Termination:


- Wire
- Terminal Blocks
- Pressure Terminal Blocks

**Weight:** 3 to 65lbs (1.36 to 29.50kg)


### Agency Approvals:



## F3480 Simplified Schematic

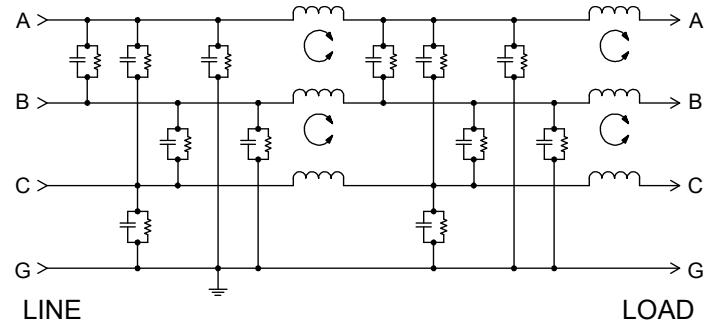

## F3600 Simplified Schematic

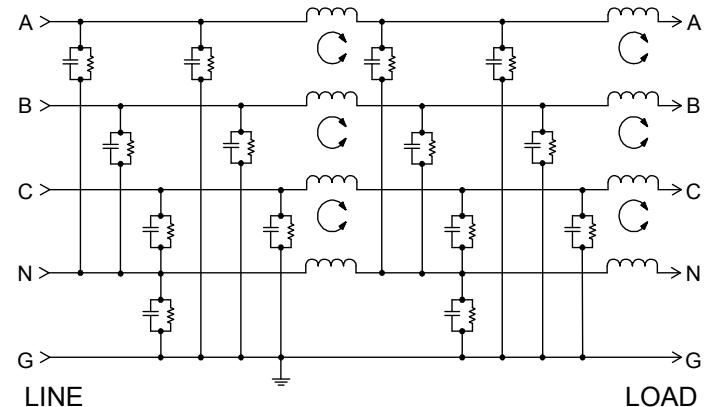

# 3-Phase Power Line Filters

## Ordering Information:

**F3600 T 600**

3-Phase Series:  
 F3480 = 480 VAC  
 F3600 = 600 VAC

Current Rating 008 - 608  
 (Refer to Charts)

T = Terminal Blocks  
 B = Wire Leads  
 A = .250 Q.C. Terminal  
 (8 - 50A Only)

F3480 Series - 480 VAC															
Rated Current (Amps)	Part Number	Maximum Leakage Each L/G (250V, 60Hz)	Minimum Insertion Loss (dB)						Dimensions (Inches)						
									A	B	C	D	E	F	G
608A	F3480T608	140mA	Frequency (MHz)						18.75	5.25	5.93	41.25	16.00	8.00	.28 x .40
	F3480B608		.15	.5	1	5	10	30	18.75	5.25	4.50	--			
	CM	60	70	70	60	45	30								
322A	F3480T322	90mA	Frequency (MHz)						10.50	5.25	4.63	23.50	8.00	4.00	.28 x .40
	F3480B322		.15	.5	1	5	10	30	10.50	5.25	4.50	--			
	CM	60	70	70	65	55	45								
185A	F3480T185	90mA	Frequency (MHz)						11.25	4.12	4.25	20.25	10.00	5.00	.20 x .30
	F3480B185		.15	.5	1	5	10	30	11.25	4.12	3.50	--			
	CM	60	70	70	65	55	45								
135A	F3480T136	80mA	Frequency (MHz)						8.50	4.12	4.25	16.00	7.00	3.50	.20 x .30
	F3480B136		.15	.5	1	5	10	30	8.50	4.12	3.50	--			
	CM	60	65	70	60	50	40								
112A	F3480T112	80mA	Frequency (MHz)						8.50	4.12	4.25	16.00	7.00	3.50	.20 x .30
	F3480B112		.15	.5	1	5	10	30	8.50	4.12	3.50	--			
	CM	60	65	70	60	50	40								
80A	F3480T080	30mA	Frequency (MHz)						8.50	4.12	4.25	16.00	7.00	3.50	.20 x .30
	F3480B080		.15	.5	1	5	10	30	8.50	4.12	3.50	--			
	CM	60	70	70	65	55	45								
60A	F3480T060	30mA	Frequency (MHz)						8.50	4.12	4.25	16.00	7.00	3.50	.20 x .30
	F3480B060		.15	.5	1	5	10	30	8.50	4.12	3.50	--			
	CM	60	70	70	65	55	45								
50A	F3480A050	15mA	Frequency (MHz)						8.00	5.12	2.25	--	5.00	--	.19 x .25
	F3480B050		.15	.5	1	5	10	30	8.00	5.12		--			
	F3480T050		CM	60	75	80	75	70	50				10.10		
32A	F3480A032	7mA	Frequency (MHz)						8.00	5.12	2.25	--	5.00	--	.19 x .25
	F3480B032		.15	.5	1	5	10	30	8.00	5.12		--			
	F3480T032		CM	60	70	80	75	65	45				10.10		
16A	F3480A016	3mA	Frequency (MHz)						6.00	3.88	2.00	--	4.00	--	.16 x .20
	F3480B016		.15	.5	1	5	10	30	6.00	3.88		--			
	F3480T016		CM	50	70	80	75	65	50				10.10		
9A	F3480A009	3mA	Frequency (MHz)						6.00	3.88	2.00	--	4.00	--	.16 x .20
	F3480B009		.15	.5	1	5	10	30	6.00	3.88		--			
	F3480T009		CM	60	80	80	70	60	50				10.10		
Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses are metric equivalents.															




**Curtis Industries**  
 A Division of Powers Holdings, Inc.


1-800-657-0853

# Series F3480/F3600

## F3480B & F3600B Dimensions

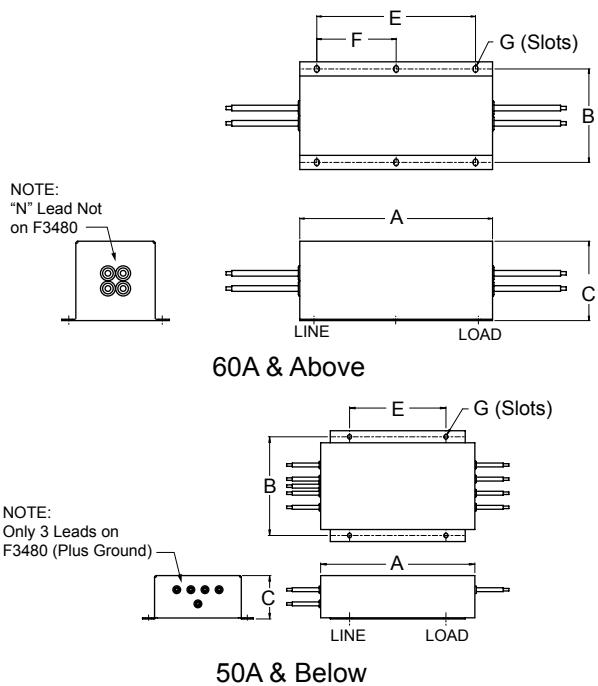

## F3480T & F3600T Dimensions

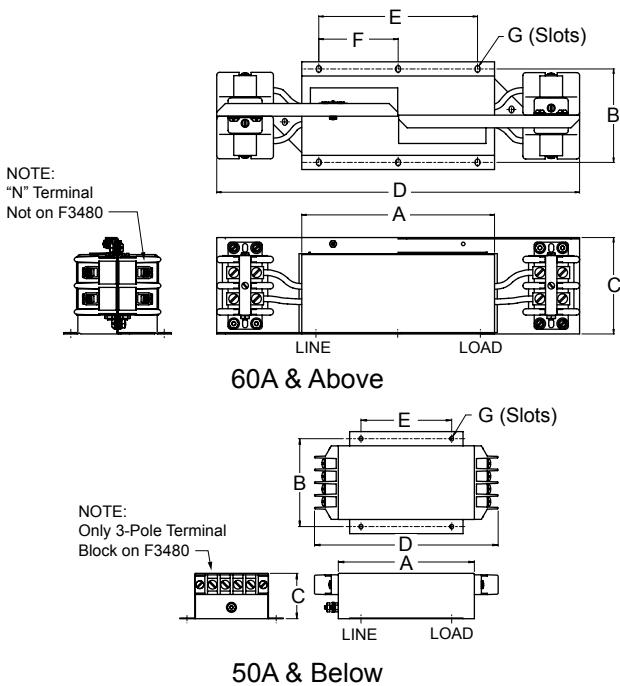


## THREE-PHASE FILTERS

Rated Current (Amps)	Part Number	Maximum Leakage Each L/G (250V, 60Hz)	Minimum Insertion Loss (dB)						Dimensions (Inches)						
			Frequency (MHz)						A	B	C	D	E	F	G
600A	F3600T600	120mA	.15	.5	1	5	10	30	18.75	5.25	5.93	41.25	16.00	8.00	.28 x .40
	F3600B600		CM	60	60	50	50	40	30	18.75	5.25	4.50	--		
300A	F3600T300	60mA	.15	.5	1	5	10	30	10.50	5.25	5.93	26.50	8.00	4.00	.28 x .40
	F3600B300		CM	60	60	50	50	40	30	10.50	5.25	4.50	--		
180A	F3600T180	60mA	.15	.5	1	5	10	30	11.25	4.12	4.25	20.25	10.00	5.00	.20 x .30
	F3600B180		CM	60	60	60	60	50	40	11.25	4.12	3.50	--		
80A	F3600T080	30mA	.15	.5	1	5	10	30	8.50	4.12	4.25	16.00	7.00	3.50	.20 x .30
	F3600B080		CM	60	60	60	60	50	40	8.50	4.12	3.50	--		
45A	F3600A045	10mA	.15	.5	1	5	10	30	8.00	5.12	2.25	--	5.00	--	.19 x .25
	F3600B045		CM	60	60	80	70	60	45			--			
	F3600T045		DM	10	10	15	50	40	30			10.10			
25A	F3600A025	8mA	.15	.5	1	5	10	30	8.00	5.12	2.25	--	5.00	--	.19 x .25
	F3600B025		CM	60	60	80	70	60	45			--			
	F3600T025		DM	5	5	30	50	40	30			10.10			
16A	F3600A016	4mA	.15	.5	1	5	10	30	6.00	3.88	2.00	--	4.00	--	.16 x .20
	F3600B016		CM	50	70	80	70	60	45			--			
	F3600T016		DM	5	5	35	40	40	40			8.10			
8A	F3600A008	4mA	.15	.5	1	5	10	30	6.00	3.88	2.00	--	4.00	--	.16 x .20
	F3600B008		CM	60	70	80	70	60	45			--			
	F3600T008		DM	5	10	50	40	40	40			8.10			


## DC FILTERS

# *General Purpose* *High Performance*

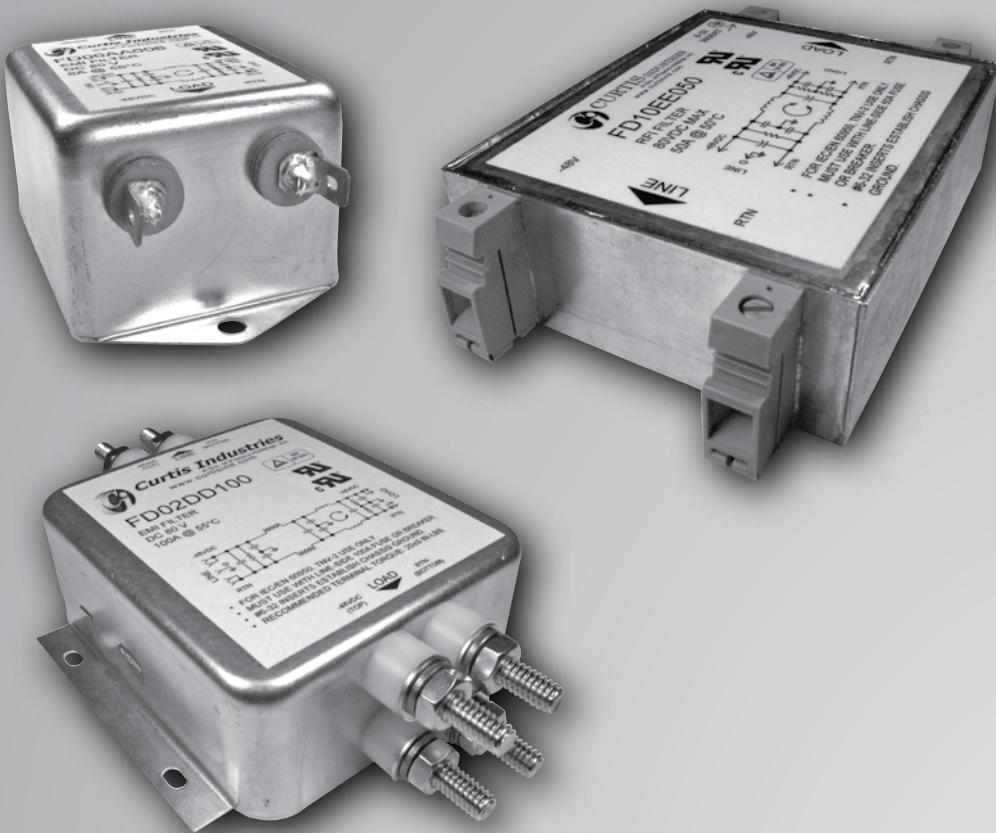

*Curtis Industries*  
A Division of Powers Holdings, Inc.

# FD Series Filters

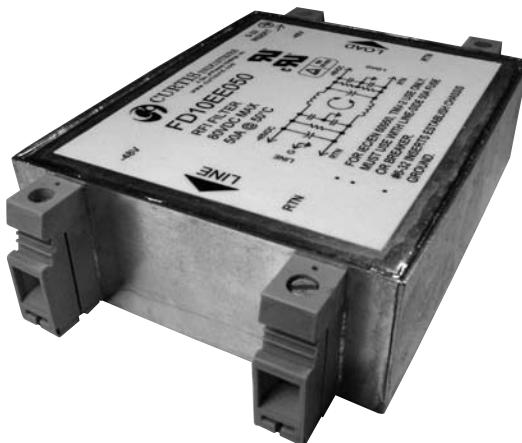

The FD Series of DC filters are designed as a general purpose line of filters for DC applications. They are designed to comply with UL/EN 60950 and UL 1459, CISPER 22 and Telecordia (Bellcore) GR-1089 at 25Amps and above. These filters are available with and without circuit breakers for additional protection.

The FD Series is a compact size that can filter up to 300MHz ideally suited for the telecom-datacom market. The FD0 Series is available from 6Amps to 100Amps in the smallest, economical package. The FD02 is a high frequency filter up to 3GHz (3,000MHz) in a compact package.

These filters are ideally used in communications and central office equipment.

- Power Supplies for Communications Equipment
- Network Routing Equipment
- Switching Equipment
- Base Stations
- Modems
- Services
- Ethernet Hubs



## Specifications:

**Rated Voltage:** 80VDC Maximum

**Rated Current:** 6A  
10A  
20A  
25A  
50A  
75A  
100A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Rating (1 min):**

Line to Ground 1060VDC  
Line to Line 100VDC

**Insulation Resistance:** 1000 MΩ at 80VDC

**Ambient Temperature:** 0°C to 55°C (32°F to 131°F)

**Humidity Range:** 0% to 95% R.H.

**Termination:** See Chart at Right

**Wire Leads:** 18AWG 6A to 20A (FD0)  
(FD0 25Amp to 100Amp not available with wire leads)  
10AWG 30Amp (FD1, FD2, FD3)  
6AWG 50Amp  
4AWG 75Amp & 100Amp

**Agency Approvals:**

6Amp to 20Amp

25/08/21



25Amp to 100Amp



# Power Line Filter Selection Guide

## FD00 & FD02 SERIES

FILTER Part Number	Current Rating (Amps)	Termination		
		Quick Connects	Wire Leads	Studs
FD00AA006	6	X		
FD00BB006	6		X	
FD00DD006	6			X
FD00AA010	10	X		
FD00BB010	10		X	
FD00DD010	10			X
FD00AA020	20	X		
FD00DD020	20			X
FD00BD025	25		X	X
FD00DD025	25			X
FD00BD050	50		X	X
FD00DD050	50			X
FD00BD075	75		X	X
FD00DD075	75			X
FD00BD100	100		X	X
FD00DD100	100			X
FD02BD025	25		X	X
FD02DD025	25			X
FD02DD050	50			X
FD02BD050	50		X	X
FD02DD075	75			X
FD02BD075	75		X	X
FD02DD100	100			X
FD02BD100	100		X	X


## FD1, FD2, FD3 SERIES

FILTER Part Number	Current Rating (Amps)	Disconnect Type			Termination		
		Single Pole Rocker Breaker	Double Pole Rocker Breaker	Double Pole Handle Breaker	Wire Leads	High Current Connector	Euro Connector
FD10BB030	30				X		
FD10EE030	30					X	
FD10BB050	50				X		
FD10EE050	50					X	
FD10BB075	75				X		
FD10BB100	100				X		
FD20B_---	30, 50, or 80				X		
FD20E_---						X	
FD20R_---		X					X
FD20D_---			X				X
FD20H_---				X			X
FD20_B_---					X		
FD20_C_---						X	
FD20_E_---							X
FD20_T_---							X
FD30B_---					X		
FD30E_---	30, 50, 75, or 100					X	
FD30R_---		X					X
FD30D_---			X				X
FD30H_---				X			X
FD30_B_---					X		
FD30_C_---						X	
FD30_E_---							X
FD30_T_---							X



# FD Series Filters


## How to Order

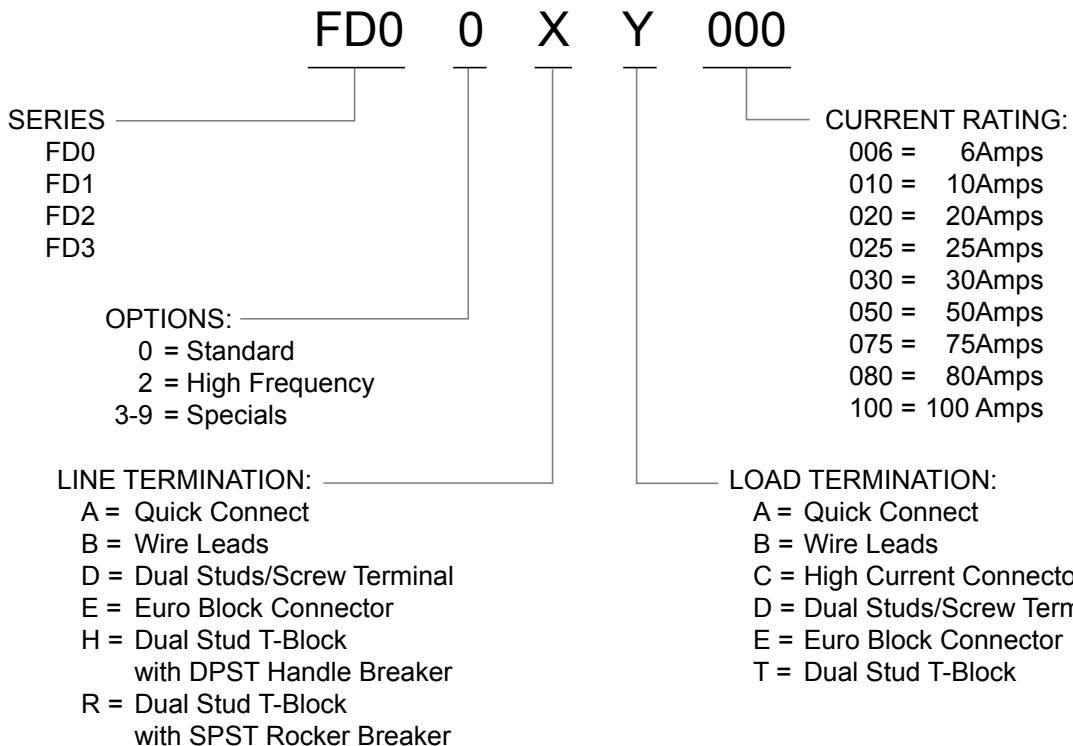


Part Number	MODE	TYPICAL INSERTION LOSS - dB (50 ohm Circuit)												
		Frequency - MHz												
		.01	.03	.10	.15	.50	1.0	5.0	10	30	100	300	1000	3000
FD00XX006	Common Differential	—	—	—	10	22	30	42	47	40	—	—	—	—
FD00XX010		—	—	—	15	45	60	60	50	50	—	—	—	—
FD00XX020		—	—	—	22	50	60	50	45	40	—	—	—	—
FD00XX025	Common Differential	—	—	—	32	38	50	55	50	40	—	—	—	—
FD00XX050		—	—	—	45	48	50	45	45	40	—	—	—	—
FD00XX075		—	—	—	45	48	50	45	45	40	—	—	—	—
FD00XX100		—	—	—	45	48	50	45	45	40	—	—	—	—
FD02XX025	Common Differential	5	5	35	45	60	60	55	55	50	40	40	10	20
FD02XX050		40	45	45	45	48	50	45	45	48	45	45	15	58
FD02XX100		—	—	—	45	48	50	45	45	40	—	—	25	40
FD10XX030	Common Differential	5	15	48	60	65	65	60	60	55	25	25	—	—
FD10XX050		55	60	70	70	70	65	70	60	50	35	15	—	—
FD10XX075		—	—	—	65	60	65	70	60	50	—	—	—	—
FD10XX100		—	—	—	65	60	65	70	60	50	—	—	—	—
FD20XX030	Common Differential	5	15	48	60	70	70	70	60	55	—	—	—	—
FD20XX050		55	65	70	65	60	65	55	50	45	—	—	—	—
FD20XX080		—	—	—	65	60	65	55	50	45	—	—	—	—
FD30XX030	Common Differential	12	20	44	60	60	60	60	60	55	—	—	—	—
FD30XX050		50	60	70	70	70	70	55	70	60	—	—	—	—
FD30XX075		—	—	—	70	70	70	55	70	60	—	—	—	—
FD30XX100		—	—	—	70	70	70	55	70	60	—	—	—	—

# FD00 Filters

## FD00AA (6, 10 and 20Amp) Dimensions

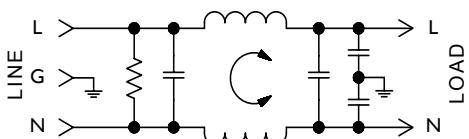


Amps	A	B	C	D	E	F
6A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	2.500 (63,5)	.550 (14,0)
10A	3.312 (84,1)	2.000 (50,8)	1.500 (38,2)	2.940 (74,7)	2.500 (63,5)	.550 (14,0)
20A	See FD00DD below for Case Dimensions					

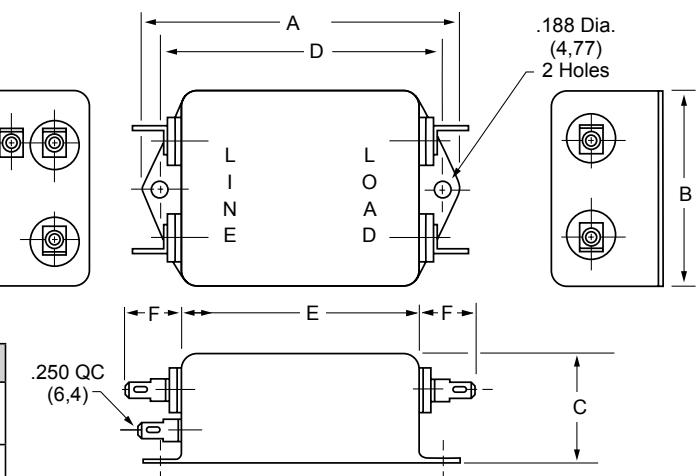


## FD00BB (6 and 10Amp) Dimensions

Amps	A	B	C	D	E
6A	3.312 (84,1)	2.000 (50,8)	1.125 (28,5)	2.940 (74,7)	2.500 (50,8)
10A	3.312 (84,1)	2.000 (50,8)	1.500 (38,1)	2.940 (74,70)	2.500 (50,8)

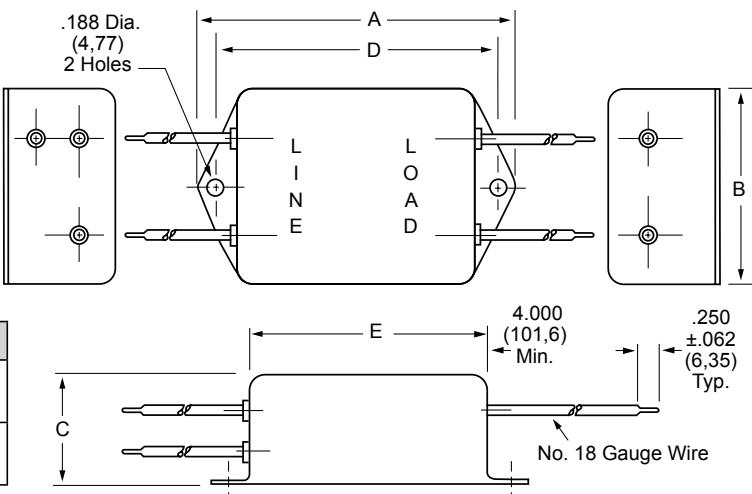

## FD00DD (20Amp) Dimensions

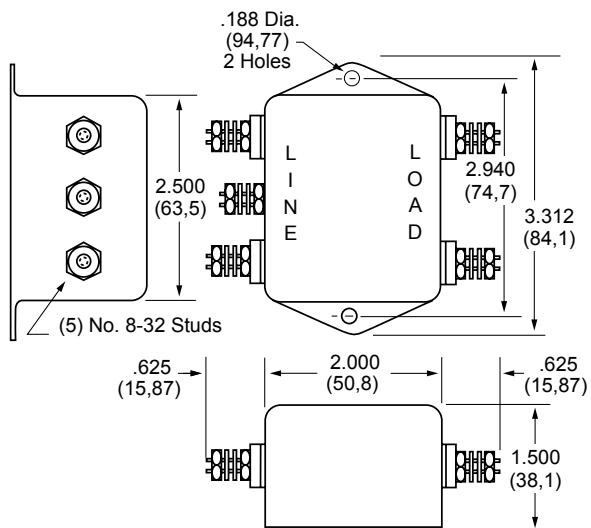

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.




1-800-657-0853

# FD00 & FD02 Filters




## FD00DD (25, 50, 75 and 100Amp) Dimensions

## *General Purpose*

## DC FILTERS

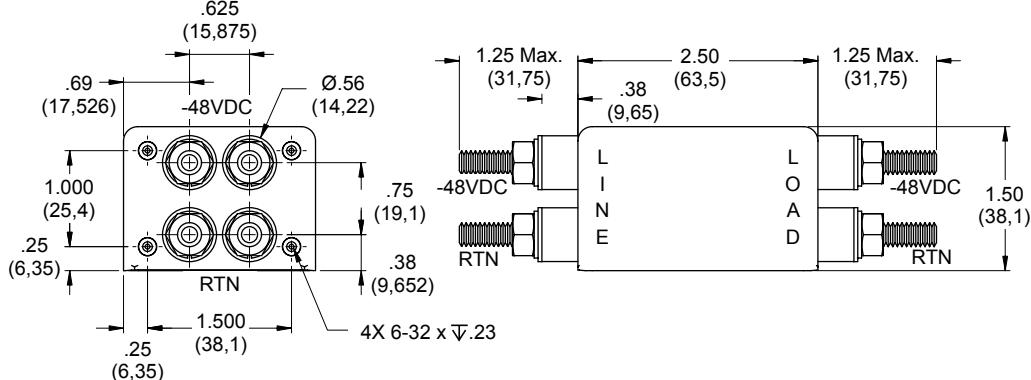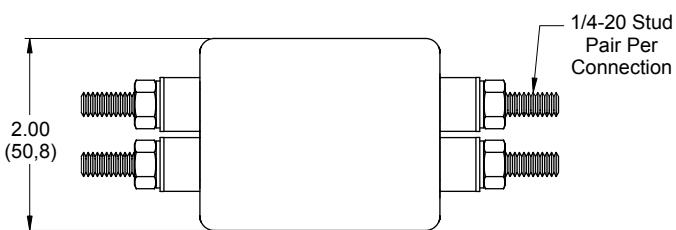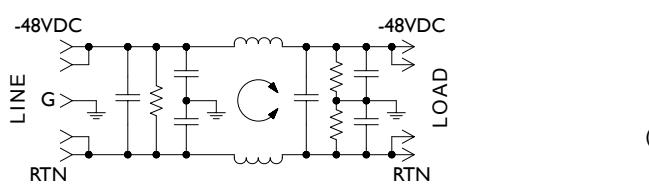


## FD02DD (25, 50 and 100Amp) Dimensions

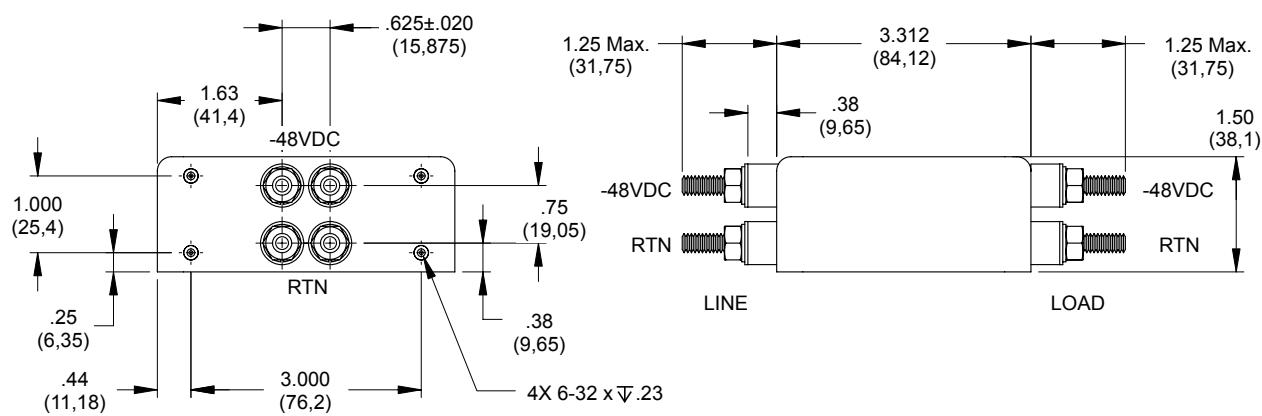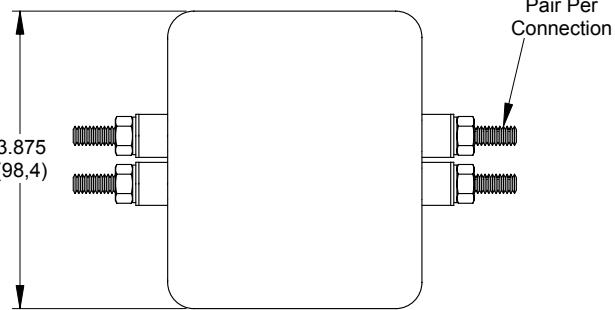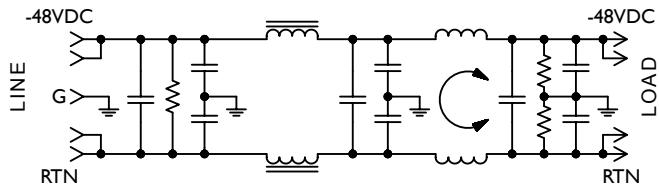


# FD1 Filters

## FD10EE050 (50Amp) Dimensions

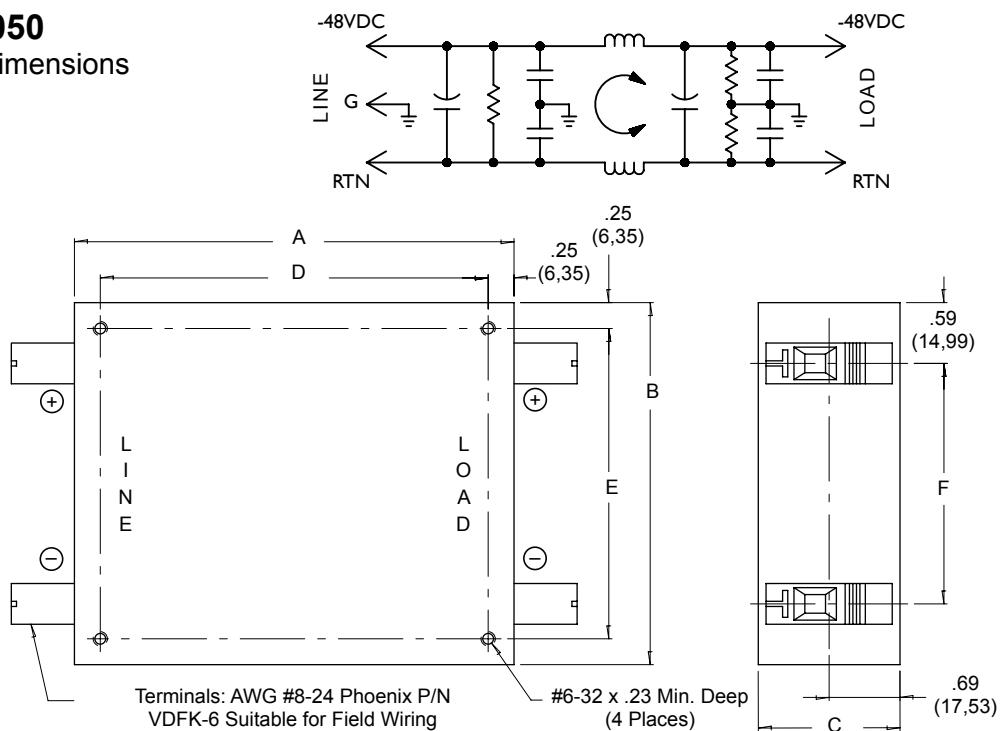

Amps	A	B	C	D	E	F
50A	4.25 (107.95)	3.50 (88.9)	1.37 (34.79)	3.750 (95.25)	3.000 (76.2)	2.33 (59.18)
100A	4.25 (107.95)	3.50 (88.9)	1.37 (34.79)	3.750 (95.25)	3.000 (76.2)	2.33 (59.18)

## FD10BB100 (100Amp) Dimensions

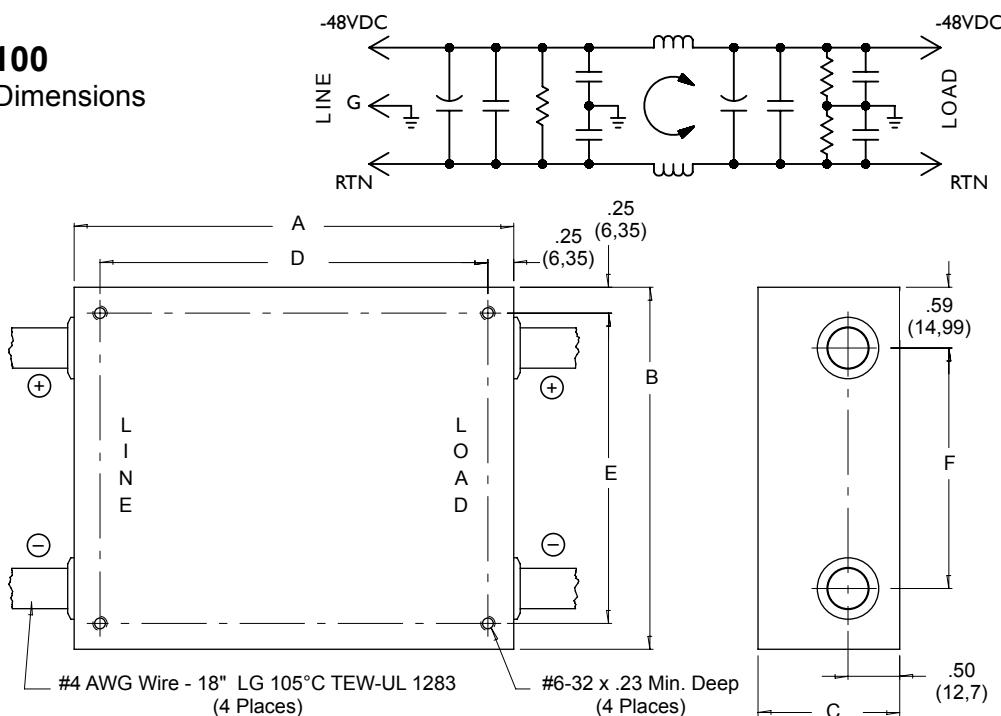

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# FD2 & FD3 Filters


**FD20HC080**

### (30, 50 and 80Amp) Dimensions

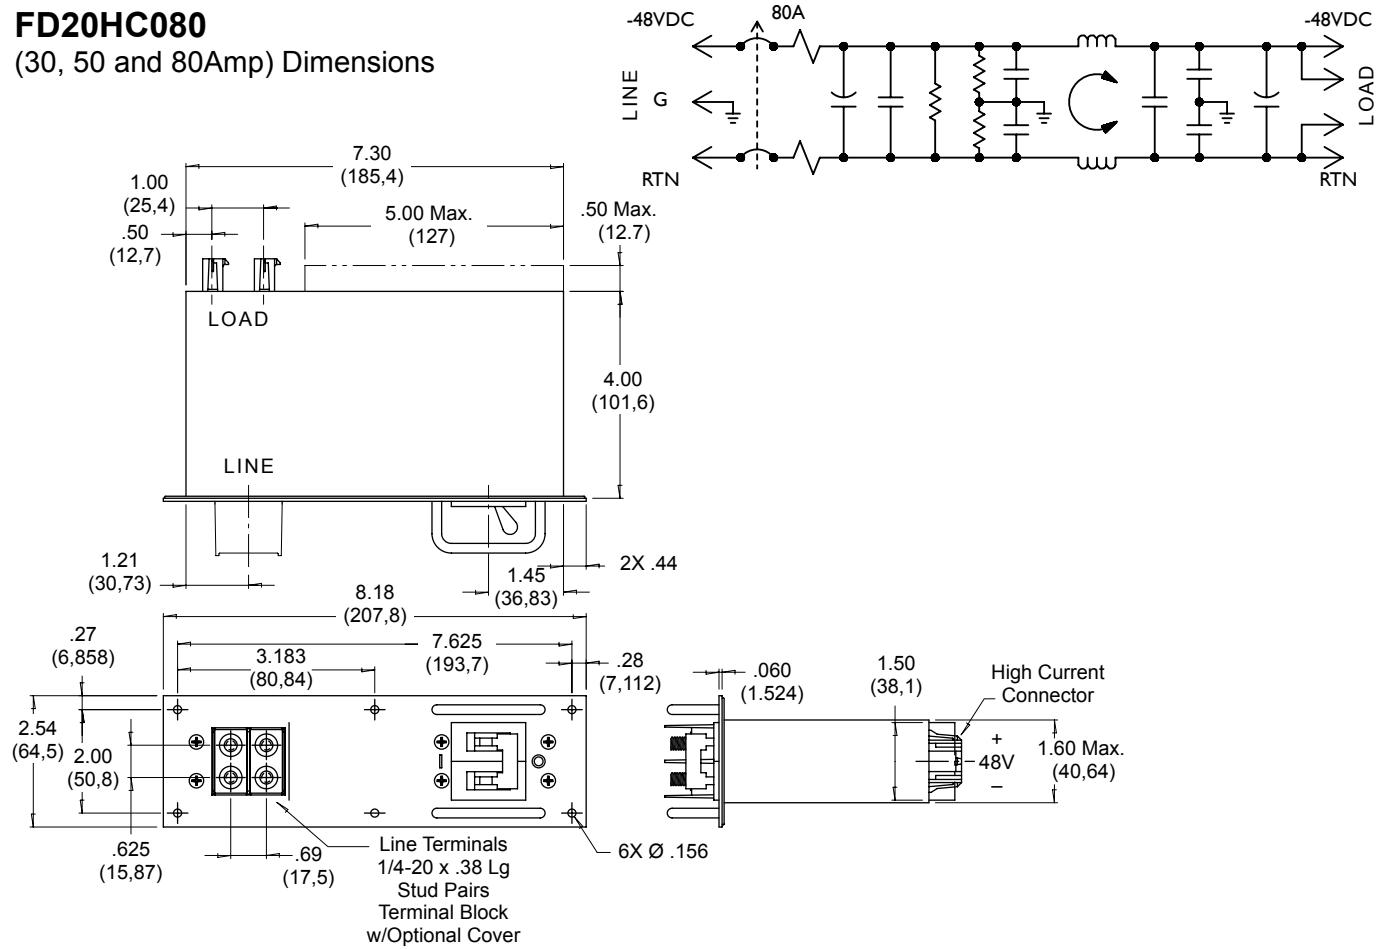


**FD30RB100**

### (30, 50, 75 and 100Amp) Dimensions

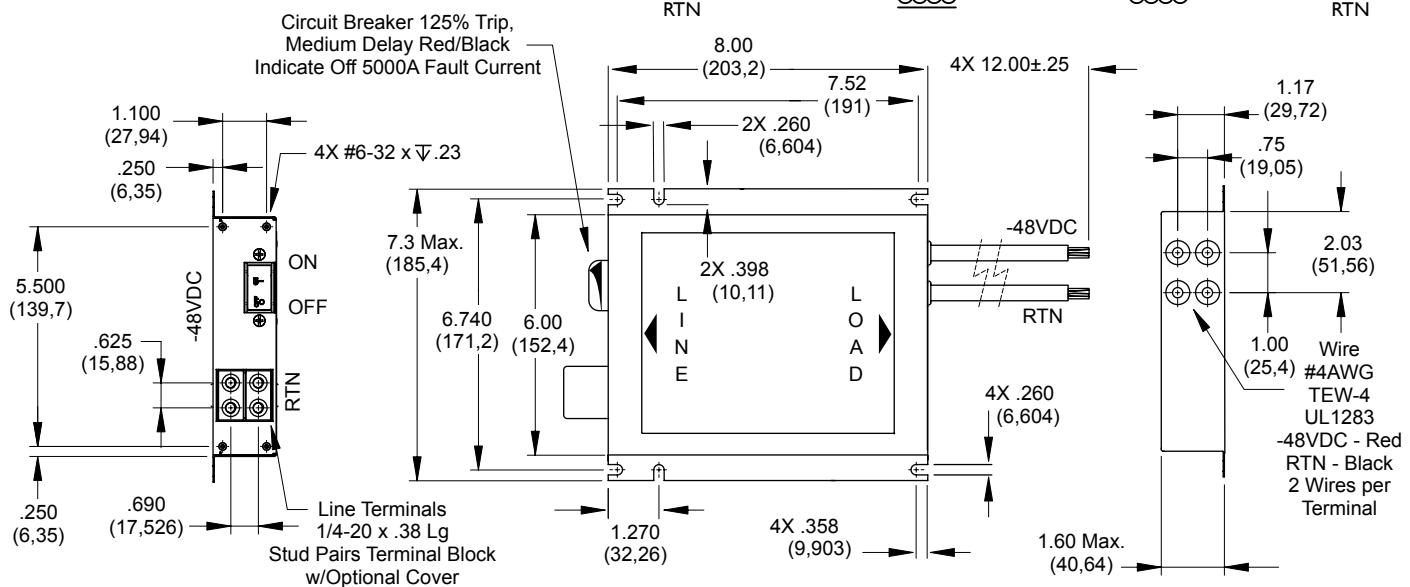

## MEDICAL FILTERS ]

### *General Purpose Combination*

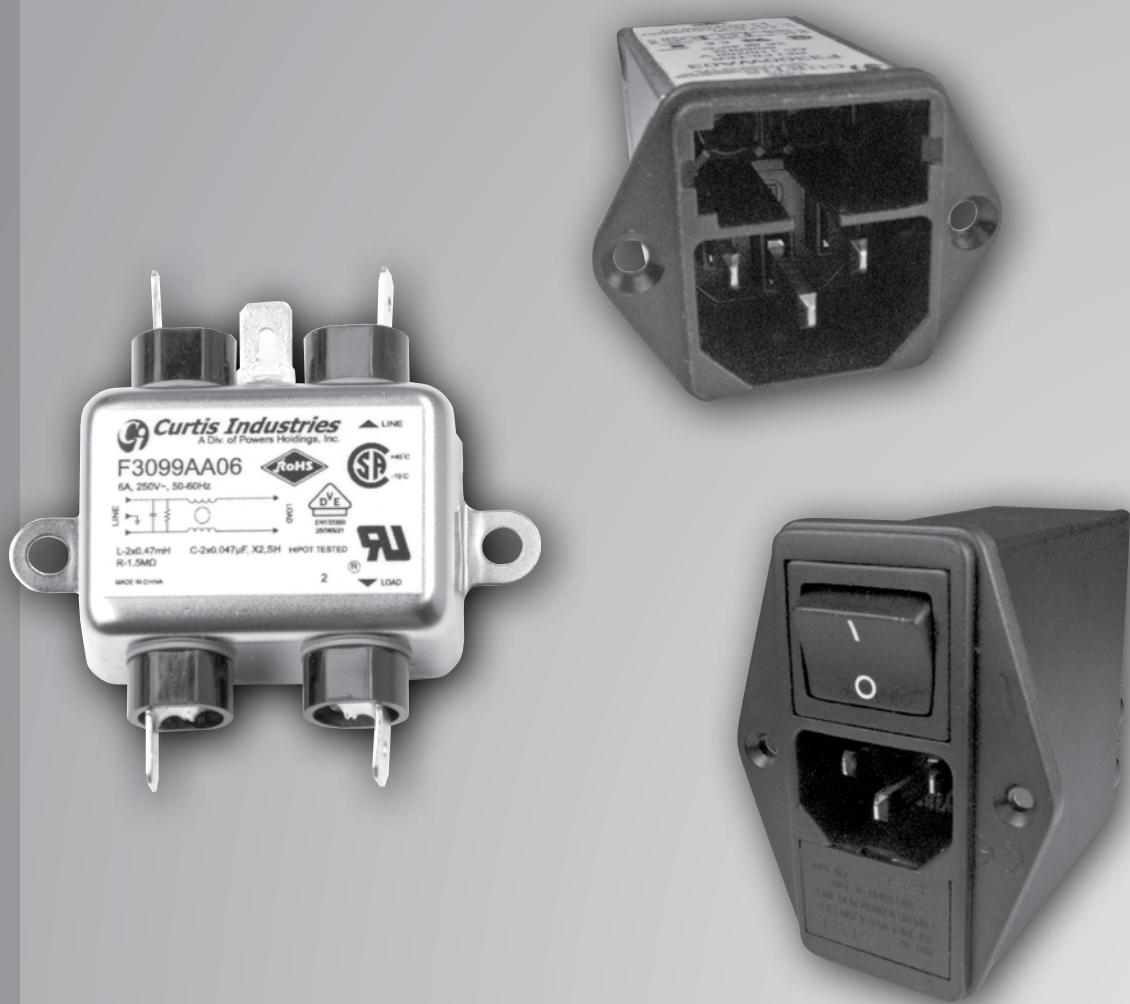

*Curtis Industries*  
A Division of Powers Holdings, Inc.



# F3099 RFI Filters




## Features:

- Designed to Meet UL544 and IEC601 Specifications for Medical and Dental Equipment, both patient care and onpatient categories.
- Leakage current in this series is extremely low to satisfy the stringest leakage current limit imposed by safety regulations for medical and dental equipment.

## F3099AA (6Amp) Dimensions

Amps	A	B	C	D	E
6A	2.53 (64,30)	1.82 (46,2)	0.78 (19,8)	2.126 (54,0)	2.53 (64,30)
	2.53 (64,30)	1.82 (46,2)	0.78 (19,8)	2.126 (54,0)	1.32 (33,5)

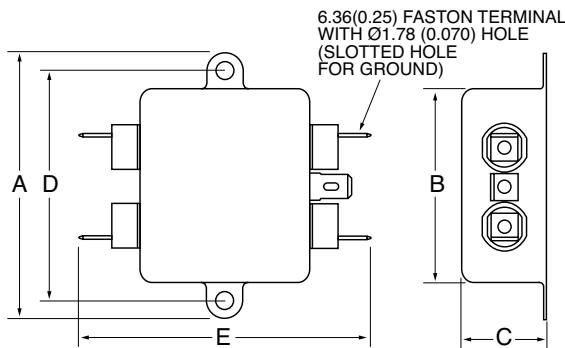

## Specifications:

**Maximum Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 250VAC  
6A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC

Line to Line 1450VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

A: Quick Connect

B: Wire

**Maximum Leakage Current:**

Each Line to Ground **F3000 Series**



115VAC, 60Hz: 2  $\mu$ A

250VAC, 50Hz: 5  $\mu$ A

**Agency Approvals:**



## F3099 Series Simplified Schematic

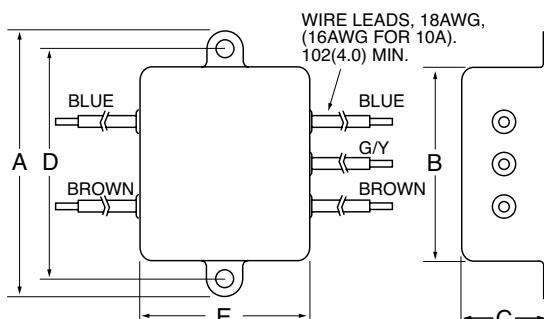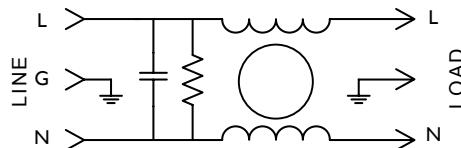

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)								
			MODE	Frequency - MHz							
6A	F3099AA06 F3099BB06	QC/QC Ø	Common Differential	3 3	7 6	11 14	20 20	22 30	24 35	22 35	18 35



# F3000/3100/3200/3400/3500 RFI Filters



## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

<b>Rated Current:</b>	115VAC	250VAC
3A	3A	
6A	6A	

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC

Line to Line 1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

A: QC – Quick Connect

C: IEC Receptacle

**Maximum Leakage Current:**

Each Line to Ground **F3000 Series**

115VAC, 60Hz: 2  $\mu$ A

250VAC, 50Hz: 5  $\mu$ A


**Agency Approvals:**




## Features:

- Designed to Meet UL544 Specification for Medical and Dental Equipment. Available to UL/IEC 60601 Standard
- F3400/F3500 Have Enhanced Differential Mode Performance
- Effective in Other Low-Leakage Current Applications

### F3000/F3100/F3200 Series Simplified Schematic

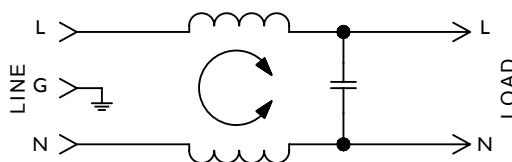

### F3400/F3500 Series Simplified Schematic

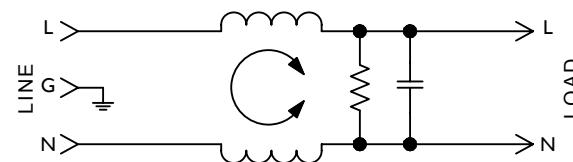

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	Frequency - MHz					
				.15	.50	1.0	5.0	10	30
3A	F3400CA03 F3500CA03	IEC/QC IEC/QC	Common Differential	22 8	32 18	35 24	30 35	25 35	20 35
6A	F3400AA06 F3100CA06 F3200CA06	QC/QC IEC/QC IEC/QC	Common Differential	10	20 2	23 8	25 32	23 34	15 23
	F3400CA06 F3500CA06	IEC/QC IEC/QC	Common Differential	15 8	21 18	24 24	24 35	22 35	26 35

NOTE: Other combinations of terminals may be specified on special order.


Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# F3300 RFI Filters

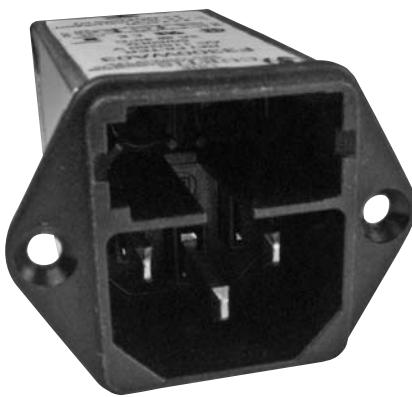

## Features:

- General Purpose "L-Type" Circuit Effective in Reducing Both Incoming and Outgoing Powerline Noise Levels in FCC "A" Applications
- Integral 5 X 20mm Single or Dual Fused IEC Connector
- Optional SST Switched IEC Connector
- Low-Leakage
- Available to UL/IEC 60601 Standard and Meets UL 544 Specification for Medical and Dental Applications
- Available in Labor-Saving PC Mounted Case Style

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

<b>Rated Current:</b>	115VAC	250VAC
	3A	3A
	6A	6A

**Current Overload:** 6X for 8 seconds

### Hi-Pot Test (1 min):

Line to Ground	1500VAC
Line to Line	1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at Rated Current

**Humidity Range:** 0% to 95% R.H.

### Termination:

- A: QC – Quick Connect
- F: Fused IEC
- J: Switched IEC
- P: PC – P.C. Board
- W: Dual Fused IEC


### Maximum Leakage Current:

Each Line to Ground	<b>F3300</b>
115VAC, 60Hz:	.015mA
250VAC, 50Hz:	.025mA

### Agency Approvals:









## F3300F Simplified Schematic

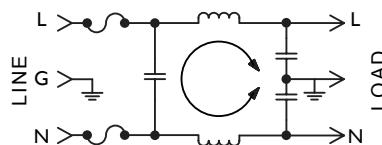

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	F3300FA03 F3300FP03	Fused IEC/QC Fused IEC/PC	Common Differential	21 8	32 18	36 24	30 35	28 35	28 35
6A	F3300FA06 F3300FP06	Fused IEC/QC Fused IEC/PC	Common Differential	18 8	30 18	34 24	26 35	25 35	25 35
3A	F3300WA03 F3300WP03	Dual Fused IEC/QC Dual Fused IEC/PC	Common Differential	21 8	32 18	36 24	30 35	28 35	28 35
6A	F3300WA06 F3300WP06	Dual Fused IEC/QC Dual Fused IEC/PC	Common Differential	18 8	30 18	34 24	26 35	25 35	25 35
3A	F3300JA03 F3300JP03	Switched IEC/QC Switched IEC/PC	Common Differential	21 8	32 18	36 24	30 35	28 35	28 35
6A	F3300JA06 F3300JP06	Switched IEC/QC Switched IEC/PC	Common Differential	18 8	30 18	34 24	26 35	25 35	25 35

NOTE: Other combinations of terminals may be specified on special order.

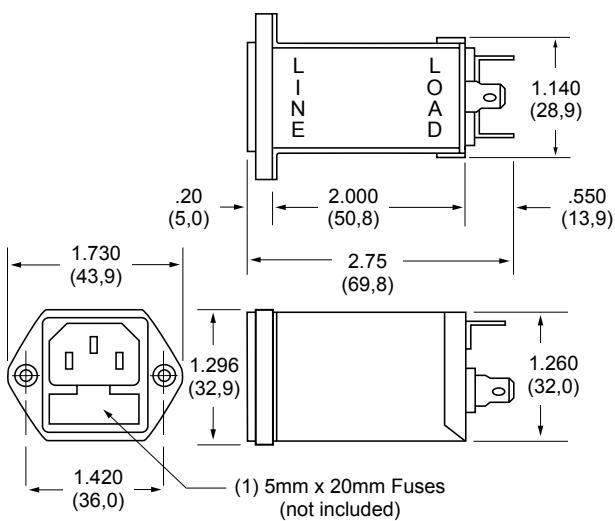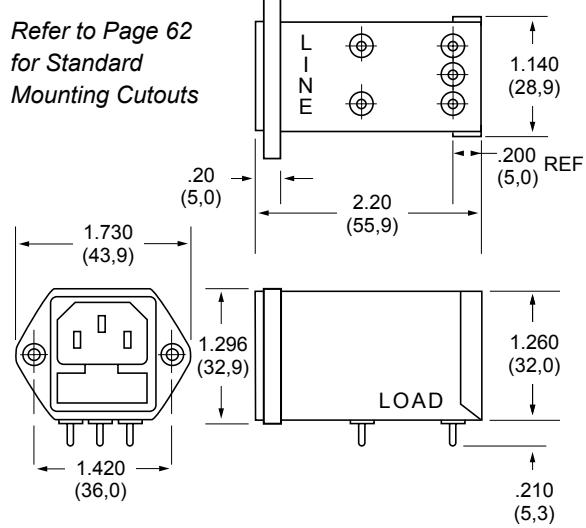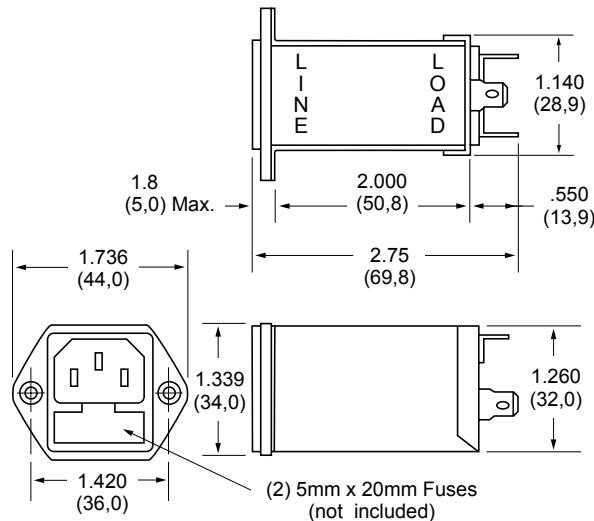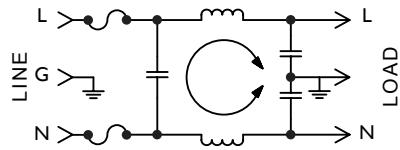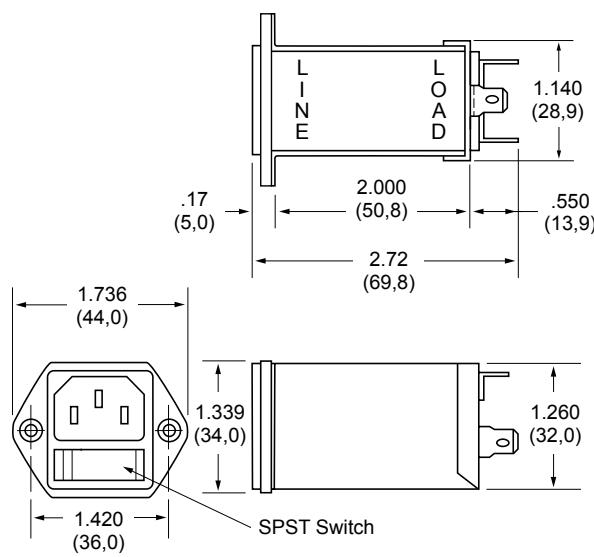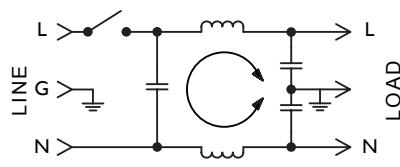

**F3300FA (3 and 6Amp) Dimensions****F3300FP (3 and 6Amp) Dimensions****F3300WA (3 and 6Amp) Dimensions****F3300W Simplified Schematic****F3300JA (3 and 6Amp) Dimensions****F3300J Simplified Schematic**

Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# PM7/PM8/PM8 Series

Combination


MEDICAL FILTERS



## Features:

- RFI Filter Module Combines IEC Connector, Fusing, and Voltage Select Features in One Unit
- PM7 Series Filters Provide 20% More Differential Mode Attenuation Than Comparable Units
- Accepts Either U.S. or European Standard Fuse Sizes
- Available to UL/IEC 60601 Standard and Meets UL 544 Specification for Medical and Dental Applications

## PM7 Series Simplified Schematic

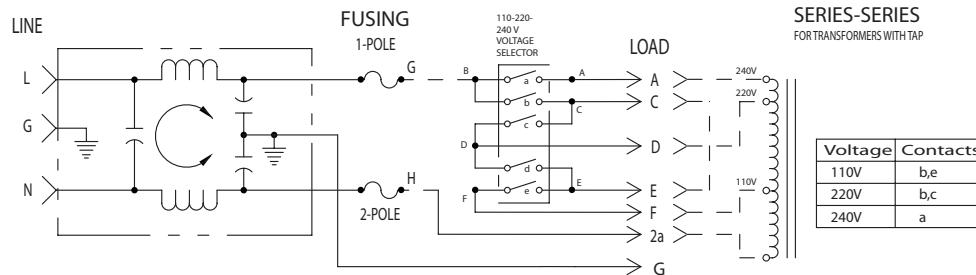

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)						
			MODE	.15	.50	1.0	5.0	10	30
3A	PM7XXX03 PM8XXX03 PM9XXX03	IEC/Solder Tabs	Common Differential	14 8	20 18	22 24	24 46	22 50	15 40
6A	PM7XXX06 PM8XXX06 PM9XXX06	IEC/Solder Tabs	Common Differential	10 8	15 18	18 24	18 39	18 40	15 40

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC  
3A 3A  
6A 6A

**Current Overload:** 6X for 8 Seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC  
Line to Line 1768VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max. at Rated Current

**Humidity Range:** 0% to 95% R.H.

**Termination:**

- IEC Receptacle
- Wire Wrap/Solder

**Maximum Leakage Current:**

Each Line to Ground PM7, PM 8, PM9  
115VAC, 60Hz: 0.002mA  
250VAC, 50Hz: 0.005mA







**Voltage Select Card:** Installed in 120VAC position unless otherwise specified

**Agency Approvals:**



Refer to Page 86 for Ordering Instructions

Specifications subject to change.  
Dimensions are shown for reference purposes only.

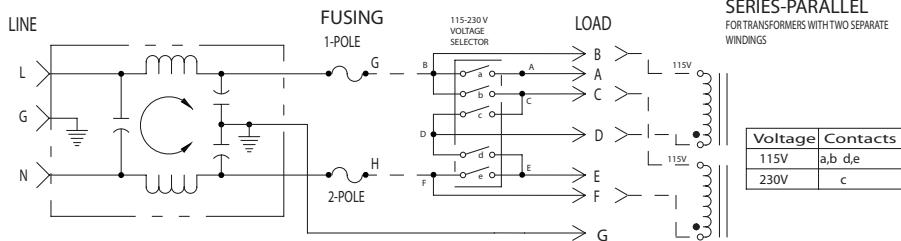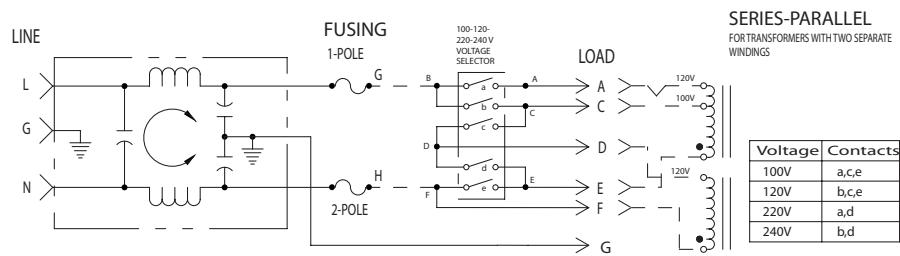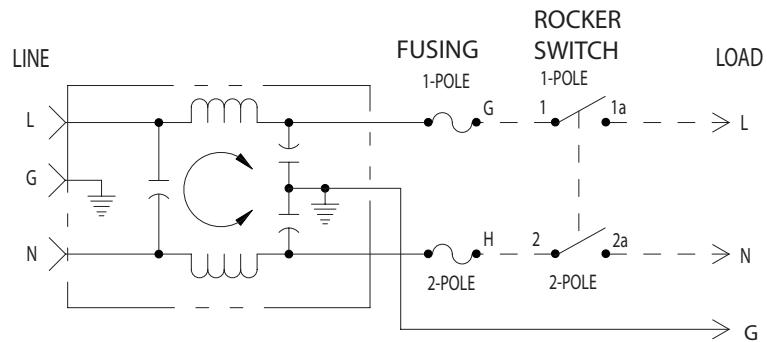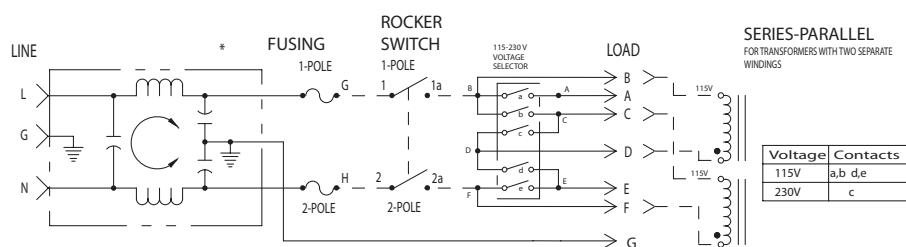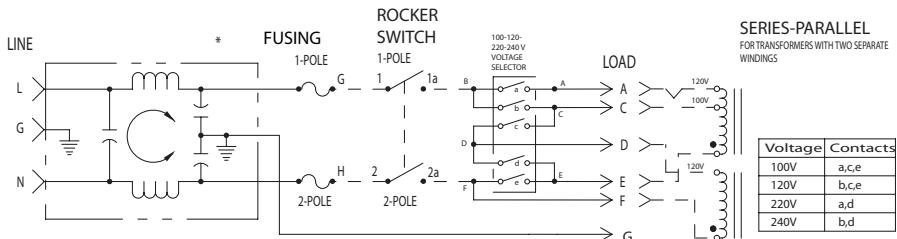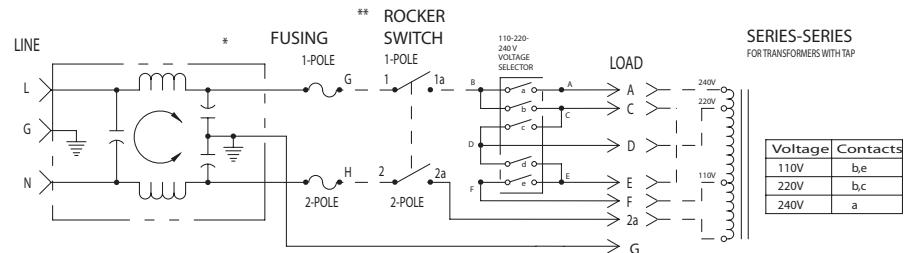
**PM7 Series  
Simplified  
Schematic**

**PM8 Series Simplified Schematic**

**PM9 Series  
Simplified  
Schematic**


Dimensions are in inches and millimeters unless otherwise specified.  
Values in parentheses are metric equivalents.




**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# PM7/PM8/PM8 Series (continued)


## PM7/PM8 Snap-Mount Series (3 and 6Amp) Dimensions

Refer to Page 82  
for Standard  
Mounting Cutouts

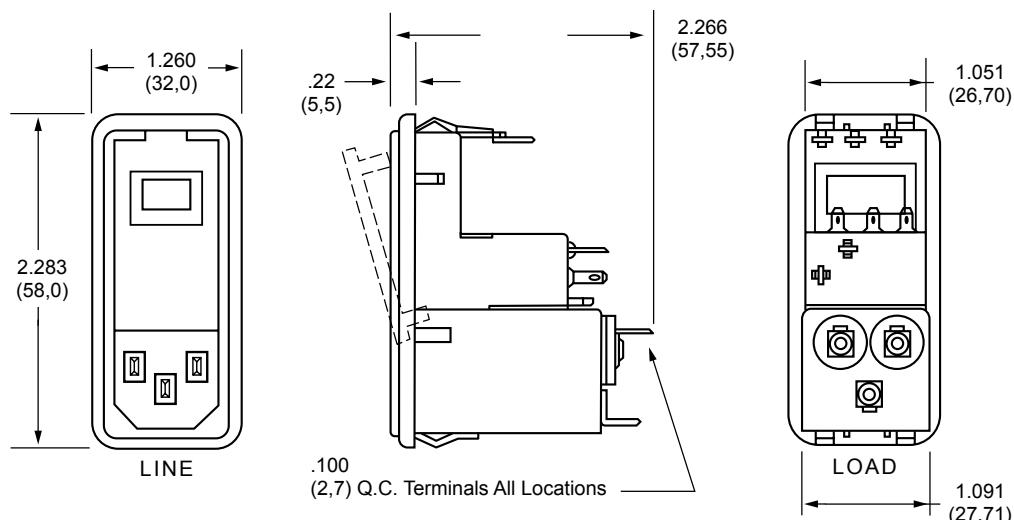

## PM7/PM8 Screw-Mount Series (3 and 6Amp) Dimensions


Refer to Page 82  
for Standard  
Mounting Cutouts

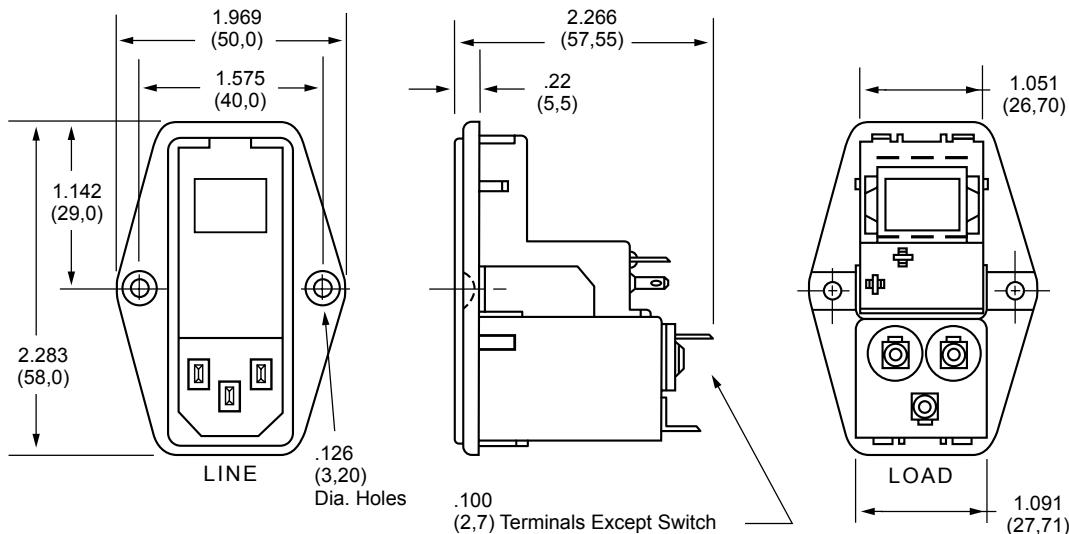



## PM9(3 and 6Amp) Dimensions

Refer to Page 82  
for Standard  
Mounting Cutouts

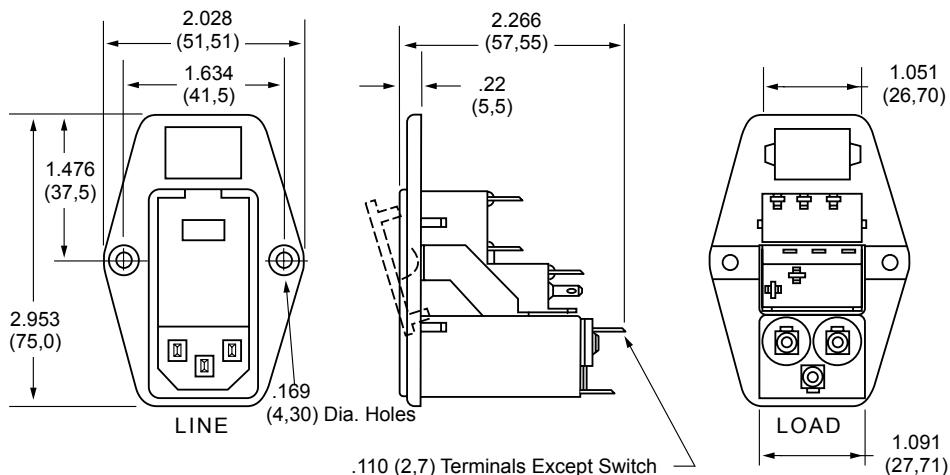

## How to Order

**PM7**

**PM8**

**PM9**

<b>SERIES</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
PM = Medical Power Entry				
<b>MOUNTING</b>				
<b>METHOD &amp; FUSING</b>				
0 = Snap Mount Metric Fuse (Except PM90 Series)				
1 = Snap Mount US Fuse (Except PM90 Series)				
2 = Snap Mount 2 Metric Fuses (Except PM90 Series)				
3 = Snap Mount 2 US Fuses (Except PM90 Series)				
6 = Screw Mount Metric Fuse				
7 = Screw Mount U.S. Fuse				
8 = Screw Mount 2 Metric Fuses				
9 = Screw Mount 2 U.S. Fuses				

## INSTALLATION INSTRUCTION IMPORTANT – CHANGING FUSE/VOLTAGE

### PM7/PM8/PM9

To change fuse, remove power cord and open the front cover on the module. Remove fuse holder and replace fuse. Reinsert fuse holder and close cover. To change the operating voltage on the PM7 and PM9 Series, remove the power cord and open front cover. Rotate voltage select wheel until desired voltage appears in window of cover.

- Filter shipped without fuse.

**Always use caution when selecting and changing fuses and voltage requirements. Curtis Industries is not responsible for malfunction due to improper installation/selection of fuse and/or voltage select.**



# PM1 Series

Combination

MEDICAL FILTERS



## Features:

- RFI Filter Module Combines IEC Connector, Fusing, Optional Voltage Select and On/Off Switch into a Single, Space-Efficient Assembly
- Enhanced Low Frequency Response with No Resonant Peaks
- Fully Shielded for Radiative Noise Control
- Accepts Either U.S. or European Standard Fuse Sizes. Dual or Single Power Line Fusing
- Meets IEC 60601 Standard and Meets UL 544 Specification for Medical and Dental Applications

**PM1 Series Simplified Schematic without Voltage Selector**

## Specifications:

**Rated Voltage:** 250VAC Maximum - 50/60 Hz

**Rated Current:** 115VAC 250VAC  
10A 10A

**Current Overload:** 6X for 8 seconds

**Hi-Pot Test (1 min):**

Line to Ground 1500VAC  
Line to Line 2250VDC

**Insulation Resistance:**  $9 \times 10^9 \Omega$  at 100VDC

**Ambient Temperature:** 40°C Max at rated current

**Humidity Range:** 0% to 95% R.H.

**Termination:**


- QC – Quick Connect
- IEC Receptacle

**Maximum Leakage Current:**


Each Line to Ground	<b>PM1</b>	<b>PM1-PO</b>
115VAC, 60Hz:	0.002mA	0.015mA
250VAC, 50Hz:	0.005mA	0.025mA

**Voltage Select Card:** Installed in 120VAC position unless otherwise specified

**Agency Approvals:**

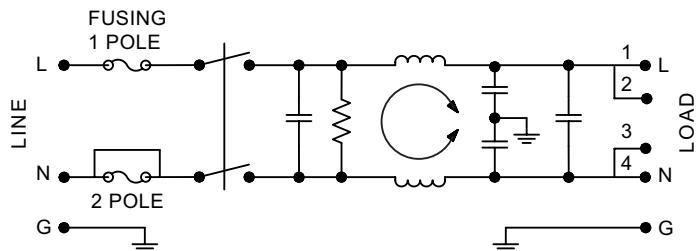

**PM1 Series Simplified Schematic with Voltage Selector**

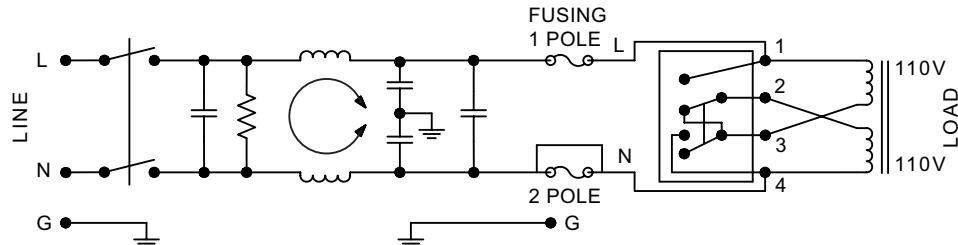

Nominal Current Rating	Part Number	Termination Line/Load	MINIMUM INSERTION LOSS - dB (50 ohm Circuit)								
			MODE	.05	.15	.50	.10	5.0	10	30	
10A	PM1XXX10	IEC/QC	Common Differential	10 10	20 20	30 30	33 35	25 55	20 60	15 55	
	PM1XXXP0	IEC/QC	Common Differential	123 10	234 20	30 30	35 35	25 65	25 65	30 55	

NOTE: Other combinations of terminals may be specified on special order.




## PM1

(10Amp)

Dimensions

Refer to Page 82  
for Standard  
Mounting Cutouts

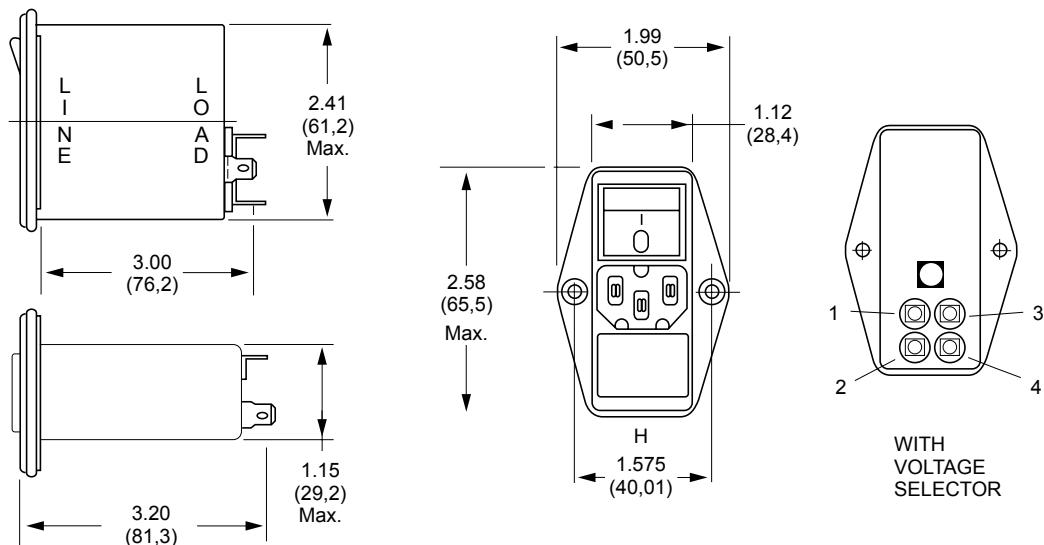

## How to Order

PM1	X	X	X	X	0
SERIES					
PM = Medical Power Entry					
MOUNTING METHOD & FUSING					
6 = Screw Mount Metric or U.S. Fuse*					
8 = Screw Mount 2 Metric or U.S. Fuses					
*U.S. Fuse not available without voltage selector					
VOLTAGE SELECTOR					
0 = No Selector					
3 = 115-230 VAC					
OPTIONS (Consult Factory)					
1 = Standard Units					
P = High Performance Insertion Loss					
CURRENT RATING					
0 = 10 AMP					
SWITCH					
0 = No Switch					
1 = SPST Rocker Switch					
2 = DPST Rocker Switch					

## INSTALLATION INSTRUCTION IMPORTANT – CHANGING FUSE/VOLTAGE

### PM1

To change fuse, remove power cord. Remove voltage selector and replace fuse. Reinsert fuse holder. To change the operating voltage on the PM1 Series, remove the power cord and rotate fuse holder block until desired voltage aligns with the mark on the module housing.


- Filter shipped without fuse.

Always use caution when selecting and changing fuses and voltage requirements. Curtis Industries is not responsible for malfunction due to improper installation/selection of fuse and/or voltage select.




# Standard Mounting Cutouts


## PM7/PM8 Snap-Mount Series

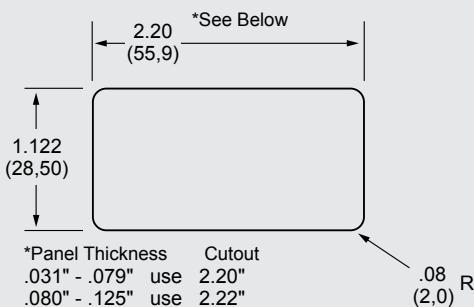


## PM7/PM8 Screw Mount Series

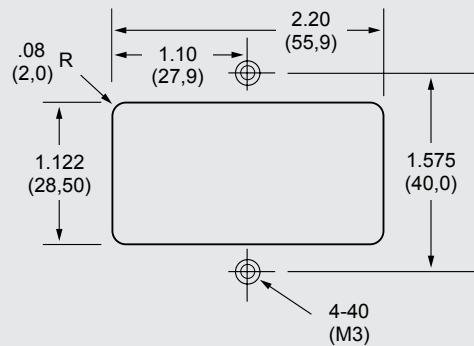

## PM9 Screw Mount Series

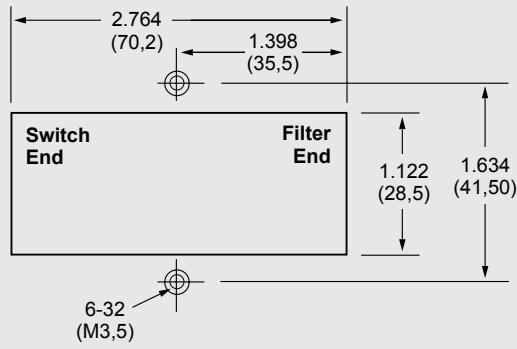

## PM1 Screw Mount Series

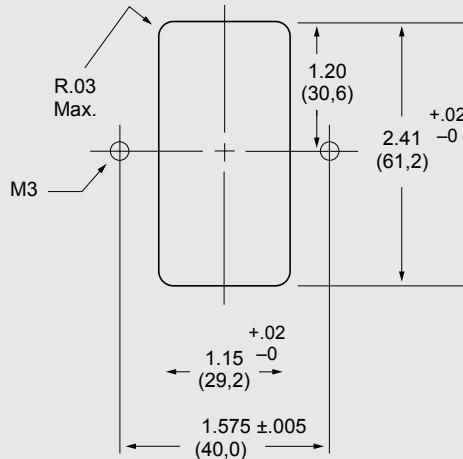

## **TECHNICAL CONSIDERATIONS**

**Understanding Terminology**

**Technical Considerations**

**Conducted Emissions Testing**

**Custom Filter Capabilities**



# Understanding Terminology

Curtis Industries, a leading manufacturer of superior-quality electronic and electrical components and assemblies for more than 70 years, offers a complete line of RFI power line filters designed to help your equipment meet FCC and CE requirements on conducted EMI.

Radio frequency interference (RFI) is unwanted noise generated by a wide variety of electronic and electrical devices. Governments of most industrial



countries, including the United States, Canada and the European Union have enacted guidelines on emitted RFI.

Curtis designs quality into every product and then tests for quality by specification compliance, including hipot, component value, grounding and leakage, on a 100% production basis. We employ a rigorous component qualification program with thorough incoming and on-line inspection procedures. Our computer-controlled 100% safety and performance testing to demanding customer requirements is your assurance of the highest quality RFI filters available today.

This section provides you with some basic knowledge on terminology and technical information helpful in solving your noise emission in power circuits. For additional information visit our website at [www.curtisind.com](http://www.curtisind.com).

## Definitions

**Attenuation:** The decrease in intensity or absorption of electromagnetic energy. Expressed in dB.

**Conducted Interference:** Electromagnetic signals entering a device through direct connection.

**Emissions:** The level of electromagnetic disturbances equipment causes to its environment.

**Filter:** Remove electrical noise or interference from the power line by cleaning up the sine wave.

**Immunity:** The level to which equipment is immune to electromagnetic disturbances in its environment.

**Impedance:** Opposition to the flow of electrical current when a given voltage is applied.

**Inductor:** Passive component that produces a voltage proportional to the change in current. Measured in Henrys.

**Insertion Loss:** The electromagnetic signal loss resulting from the insertion of a filter in a transmission line. Expressed in dB.

## What is RFI?

Radio frequency interference (RFI) is the radiation or conduction of radio frequency energy (or electronic noise) produced by electrical and electronic devices at levels that interfere with the operation of adjacent equipment. Frequency ranges of most concern are 10 kHz to 30 MHz (conducted) and 30 MHz to 1 GHz (radiated).

## What causes RFI?

The most common sources include components such as switching power supplies, relays, motors and triacs. These devices are found in a wide variety of equipment used in industrial, medical, white goods, and building HVAC equipment.

## What are the types of RFI?

An electrical or electronic device emits RFI in two ways:

- **Radiated RFI** is emitted directly into the environment from the equipment itself.
- **Conducted RFI** is released from components and equipment through the power line cord into the AC power line network. This conducted RFI can affect the performance of other devices on the same network.

## How can RFI be controlled?

- **Radiated RFI** is usually controlled by providing proper shielding in the enclosure of the equipment.
- **Conducted RFI** can be attenuated to satisfactory levels by including a power line filter in the system.

The filter suppresses conducted noise leaving the unit, reducing RFI to acceptable levels. It also helps to lower the susceptibility of the equipment to incoming power line noise that can affect its performance.

## What is the government's role in regulating RFI?

Governments and safety agencies of major industrial countries, including the United States, Canada, and the European Union have established noise emission regulations that are focused on digital and other electronic equipment. The most important of these guidelines are FCC CFR 47 (Parts 15 and 18) in the United States and CISPR 11, 14 and 22 in the European Union.

FCC CFR 47 (Part 15) regulates the RF

interference of electronic computing devices, defined as any electronic device or system that generates and uses timing signals or pulses at a rate in excess of 10,000 pulses (cycles) per second and uses digital techniques. This definition includes telephone equipment that utilizes digital techniques and any device or system that generates and uses radio frequency energy for the purpose of performing data-processing functions such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval or transfer.

FCC regulations are broken down into **Class A** computing devices marketed for use in commercial, industrial or business environments, and **Class B** devices intended for use in a residential environment.

The European Union has harmonized the various national regulations and has established the international standards CISPR 11, 14 and 22. CISPR 11 covers industrial, scientific and medical equipment. CISPR 14 covers electrical and thermal appliances and tools. CISPR 22 covers information technology equipment.

In addition to governmental regulations, safety agencies worldwide have established guidelines for all electrical/electronic components. These include UL, CSA and TUV. They are designed to protect against shock and fire hazard.

## How do RFI power line filters work?

Consisting of a multiple-port network of passive components arranged as a dual low-pass filter, the RFI filter attenuates radio frequency energy to acceptable levels, while permitting the power frequency current to pass through with little or no attenuation. Their function, essentially, is to trap noise and to prevent it from entering or leaving your equipment.

RFI is conducted through a power line in two modes. Asymmetric or **common mode** noise occurs between the line and ground. Symmetric or **differential mode** is measured from line to line. See the selection guide on page 2 under "Performance."




# Technical Considerations

## Meeting Emissions Standards

The emissions limits that a piece of equipment must meet will depend on the intended market for that piece of equipment. If there is more than one market, more than one emission standard may have to be met. This can have a substantial effect on the circuit, size, and cost of a filter. Standards like the CISPR's or the FCC Rules Part 15 have frequency limits of 150 kHz to 30 MHz.

### FCC 15 AND CISPR CONDUCTED EMISSION LIMITS DIGITAL EQUIPMENT

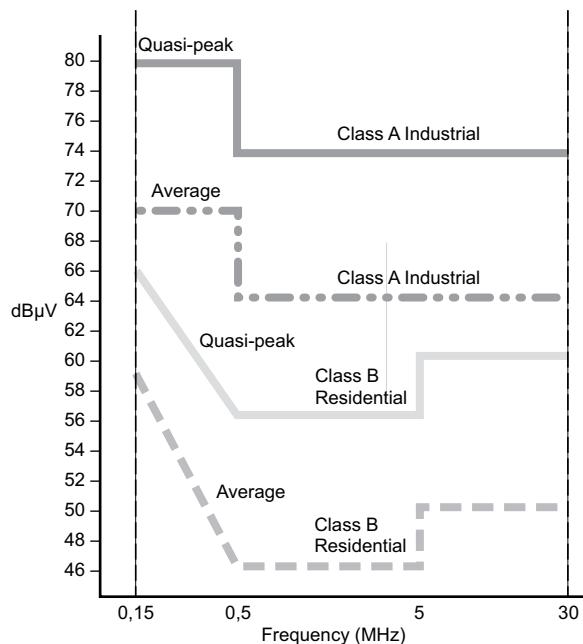

EMI measurements are generally made using Spectrum Analyzers with Average or Quasi-Peak detectors in accordance with methods described in CISPR 16. Quasi-Peak differs from Average measurements by weight-averaging the peaks into the total.

Equipment meeting these specifications can utilize a filter with a fairly high cutoff frequency. Other standards like FCC 18 with a low frequency limit of 10 kHz will result in the equipment using lower cutoff filters. As might be expected, the lower the cutoff frequency, the larger the physical size and the higher the cost of the filter.

## Conducted RFI Susceptibility

The problem of susceptibility can be extremely difficult to deal with because the amplitude and frequency of the offending RF noise are seldom known and are often intermittent. If the malfunction can be duplicated by isolating the equipment from the power line with LISN's

(Line Impedance Stabilization Network) and using signal generators to inject RF of varying amplitude and frequency, some insight can be gained as to the nature of the problem. However, the criteria for acceptable performance will have to be decided upon so that a filter yielding this level of performance can be obtained from the test procedure. Unfortunately, this still does not eliminate the need for final testing in the actual operating environment which, in many cases, occurs in the field.

Selection of a suitable filter can best be based on the type of power supply or input impedance of the equipment and on the mode of the offending RFI noise.

## Noise Modes

Power line filters attenuate noise in two different modes.

**Common Mode:** Also known as line-to-ground noise measured between the power line and ground potential.

**Differential Mode:** Also known as line-to-line noise measured between the lines of power.

Power line filters are designed to attenuate either one or both modes of noise. The need for one design over another will depend on the magnitude of each noise type present. The attenuation is measured in dB (decibels) at various frequencies of signal.

## Circuit Configuration

Power line RFI filters are generally built with two or three-pole filter networks. As the number of poles and the corresponding component count increases, the cost will increase also. Trying to typify an equipment's impedance as either high or low for purposes of filter selection may not be successful. If it is a complex impedance, it could probably be low at some frequencies, high at others, and some intermediate value at still other frequencies.

Although we have been generally successful in recommending a two-pole network for linear power supplies and three-pole networks for switching power supplies and synchronous motors, you should not limit your testing to just one circuit type if either additional circuit performance or lower cost is desired. Consider the following: If the equipment looked strictly capacitive, the performance of a two-pole network would be reduced to that of a single-pole filter.

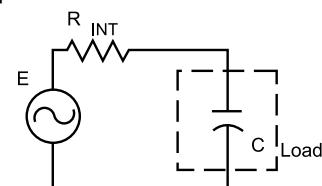


Figure 1a.  
A signal source (E) with its internal impedance driving a capacitive load.


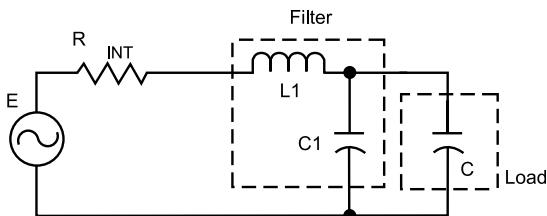


Figure 1b.

The same circuit as in Figure 1a, with the addition of a 2-pole low pass filter. Notice filter capacitor C1 is in parallel with the capacitive load.

Figure 1c.  
Combining capacitor C1 in Figure 1b,  
with the load  
results in this circuit  
configuration.

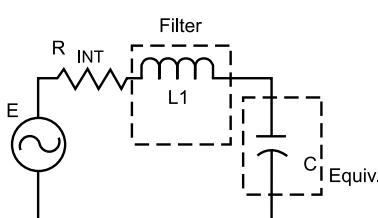

The filter has been reduced to one inductive element, L1.

Obviously a three-pole filter would be preferred for maximum performance. Likewise, if the equipment looked strictly inductive, the performance of a three-pole network would be reduced to that of a two-pole network.

Figure 2a.  
A signal source  
with its internal  
impedance driving  
an inductive load.

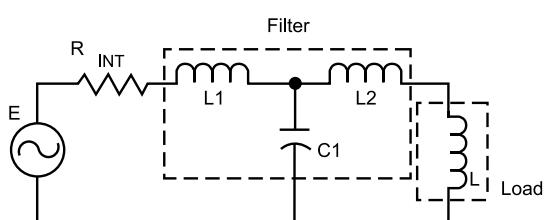
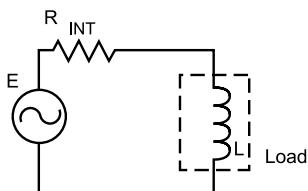


Figure 2b.

The same circuit as in Figure 2a, with the addition of a 3-pole low pass filter. Notice filter inductance L2 is in series with the inductive load.

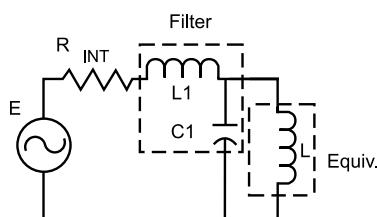


Figure 2c.

Combining inductor L2 in Figure 2b, with the load results in this circuit configuration, the filter has been reduced to two effective elements, L1 & C1.

Undoubtedly the two-pole filter would be a more economical choice with probably equal performance in this application. Since the equipment is not likely to be equivalent to either one of these simple cases, the only way to find the best cost-effective solution is to test the filters in your equipment and base your judgement on these test results.

## Leakage Current

The maximum leakage current that a device is allowed depends on the requirements of the particular safety agency involved. Here, selection of the filter is quite easy since either the filter is designed to meet a given level or it is not. Although there is no compromise when it comes to safety specifications, it should be understood that for a given level of performance, as the leakage current is reduced, the physical size of the package will increase. Curtis medical filters have a very low leakage current.

## Insertion Loss

DO NOT use the insertion loss specifications to make your final decision. Power line filters are two-terminal pair passive networks whose attenuation characteristics can be defined by a complex transfer function. How that transfer function will react in a particular system and at specific frequencies will depend on the complex impedances connected to each side of the filter. The equipment impedance and the impedance of the power line, even if a 50 ohm LISN (Line Impedance Stabilization Network) is being used during emission testing, will not generally be equal to the resistive 50 ohms used during insertion loss measurements. Therefore, the performance of the filter in the equipment cannot be related to the published insertion loss data.

## Minimum Insertion Loss

Do not be alarmed that the insertion loss figures we have published may be of lower value than those of our competition. You will only find guaranteed minimum insertion loss figures in this catalog, without any mention of typical values.

Insertion loss test data measured in a 50 ohm system is a valuable incoming inspection tool to assure you that consistent product is being shipped. The only figures of any importance are those that specify the criteria for acceptance or rejection of that product, and those figures are the minimum values.



**Curtis Industries**  
A Division of Powers Holdings, Inc.

1-800-657-0853

# RFI/EMI Conducted Emissions Testing


Curtis offers full RFI/EMI conducted emissions testing services for manufacturers who must produce equipment in accordance with FCC and CE standards.

Curtis testing facilities consist of a laboratory equipped to test and evaluate EMI characteristics of equipment that must comply with FCC Part 15 and/or CISPR standards. With these facilities, Curtis can provide manufacturers with greater assistance in the selection of RFI/EMI filters to help them meet the necessary emission levels.

## Isolated Environment Enhances Test Capabilities

- Totally isolated environment for both equipment under test and test instrumentation provided by separate chambers.
- RF screen room shielded against magnetic, electric and plane wave field per MIL-STD-285.
- Specially constructed line impedance stabilization networks (LISN) for FCC Part 15 and CISPR testing.
- Sensitive, reliable automatic measurement and recording of conducted emissions data from 10 KHz to 1 GHz.
- Computer-controlled Agilent E7402A Spectrum Analyzer with associated amplifiers and attenuators.
- Agilent E7402A graphics capabilities allow quick generation of hard copies of emissions test results.

### WITH FILTER

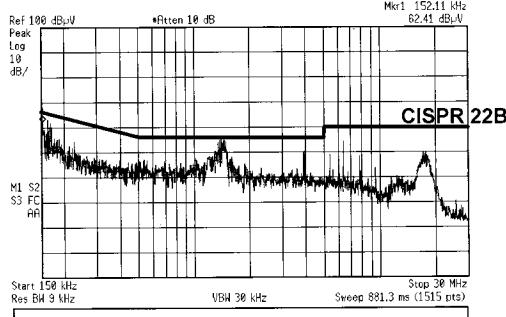

## Fast Pre-Compliance Test Results


Computer-generated graphics and test reports provide the customer with fast turnaround on all testing.

On-site RFI filter design/applications engineers are available to assist in evaluating test results and to determine cost-effective solutions to conducted emissions problems before going to agencies.

Please contact your local Curtis representative or the factory sales staff to coordinate pre-compliance testing of your equipment at Curtis Industries.



The Curtis screen room provides complete RFI isolation for equipment under test and the test instrumentation.

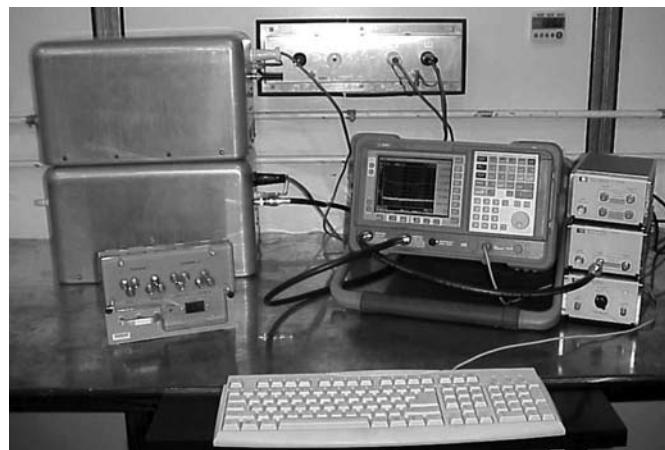

Computer-controlled test equipment assures fast turnaround on RFI emissions testing.



Curtis can provide environmental testing to demonstrate performance and survival in harsh conditions.

# Custom Filter Capabilities *We Build Confidence!*

Curtis has the capability to modify any of our standard filters or to work with you from design to delivery on a completely custom filter to meet your exact mechanical and electrical requirements. The Curtis Filter Engineering Team, drawing from our extensive knowledge and experience, is fully equipped and qualified to consult with you on your RFI and EMI emission control problems. Curtis has the ability to test your equipment in our technologically advanced screen room to help you select the proper filter for your application.



## Information We Need From You

### Specifications:

\* Rated Vol \_\_\_\_\_ \* Line Frequency: \_\_\_\_\_

\* Rated Current: \_\_\_\_\_ \* Max. Temperature: \_\_\_\_\_

Current Overload: \_\_\_\_\_ Humidity Range: \_\_\_\_\_

Max. Leakage Current (Each Line to Ground) \_\_\_\_\_

Dimensions: \_\_\_\_\_

Terminal Type: Input (Line): \_\_\_\_\_

Output (Load): \_\_\_\_\_

Mounting Torque (Panel-Mount Models Only): \_\_\_\_\_

### Test Specifications:

Hipot Test: Line to Ground: \_\_\_\_\_ VAC for One min.

Line to Line: \_\_\_\_\_ VDC for One min.

Insulation Resistance: \_\_\_\_\_

\* Minimum Insertion Loss (50Ω Circuit):

	Frequency (MHz)						
	.01	.15	.5	1	5	10	30
CM							
DM							

Organization Approvals: UL \_\_\_\_\_ CSA \_\_\_\_\_ TUV \_\_\_\_\_ Other \_\_\_\_\_

Company Name: \_\_\_\_\_ Contact: \_\_\_\_\_

E-mail Address: \_\_\_\_\_ Phone Number: \_\_\_\_\_

\* Required

### Curtis Contact Information

**E-mail:** sales@curtisind.com  
**Fax:** 414-649-4279

**Phone Number:** 1-800-657-0853  
**Address:** P.O. Box 343925, Milwaukee, WI 53234-3925



**Curtis Industries**  
A Division of Powers Holdings, Inc.




RFI Filters



Filtered Power Entry




Custom Filters

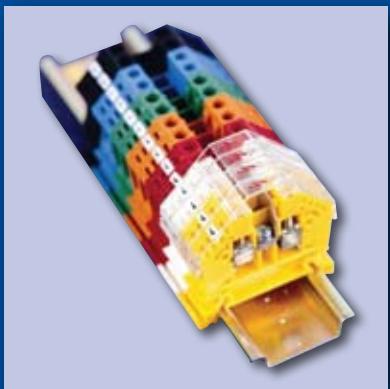

DIN Rail



PCB Mount Blocks

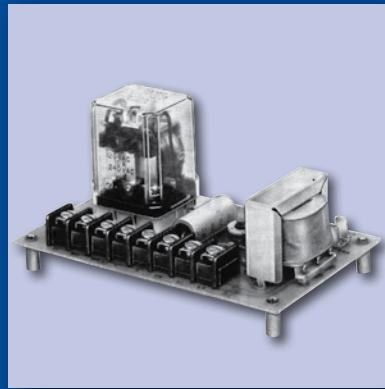

Liquid Level  
Controllers



Terminal Blocks



Custom Terminal Blocks



***Curtis Industries***

A Div. of Powers Holdings, Inc.

2400 S. 43rd St., Milwaukee, WI 53219

1-800-657-0853

[www.curtisind.com](http://www.curtisind.com)

R2 08/08