

LineGard® 15 Amp Plug Series GFCI

- Bright LED power indicator
- Recessed interface buttons reduce damage and nuisance tripping from rough service
- High strength polycarbonate housing
- Class A cULus 943 listed with load side connector assemblies
- Assemblies without load side connectors are UL recognized for use under UL 943
- NEMA 3R rated (indoor / outdoor use)
- Assembly is rated for 15 amps / 120 VAC
- Available in automatic or manual reset configurations*
- Available with single or tri-tap plug assembly



Product Description:

The LineGard® 15 Amp Plug Series is a ground fault circuit interrupter designed and manufactured by North Shore Safety, Ltd., a leader in innovated safety products. The PGFP product is rated for 15 amps at 120 VAC and available in either manual (safe start) or automatic reset configuration.

Standard offerings include products geared for maintenance repair organizations (MRO), original equipment manufacturers (OEM) or general portable power applications. MRO products are supplied with heavy-duty 12/3 conductor high flex (indoor/outdoor) safety yellow cable (SJTW type) capable of withstanding heavy trade or industrial use. OEM products are configured with robust 14/3 conductor (indoor/outdoor) black cable (SJTW type) for integration into trade related equipment. All products are industrial/trade grade tough and are backed by a 2 year manufacturer's warranty. Note that any cord or equipment updated with this device becomes OSHA compliant for power usage in a confined space and NEC compliant to NEC 590.6 (a) and (b).

Specifications:

Listing Type:	cULus Listed, UL 943 Class A
Rated Supply Voltage:	120VAC
Rated Current:	Up to 15 Amps or rating of wiring device and/or cable
Trip level, Class A:	5mA +/- 1mA (UL 943)
Operating frequency:	60 Hz
Reset type ¹ :	Automatic or manual
Ground Trip Current:	4 - 6 mA
Overload Current:	90 Amps@125VAC
Insulation Voltage:	1,500 VRMS - 1 minute
Endurance Operations:	3000 operations

* Note: 1. Manual configuration should be specified if automatic start-up after power restoration of circuit power creates an unsafe condition.

2. Integrated or replacement cable must be indoor/outdoor 3-conductor cable of type ST, SJT, SE, SJE, SO or SJO


Related Codes:

Confined space
 OSHA 29 CFR 1926.404 (b)(1)(ii) &
 OSHA 29 CFR 1926.405 (a)(2)(ii)(G)
 Construction sites
 (NEC 590.6)
 Commercial Garages
 (NEC 511.12)
 Outdoor signs
 (NEC 600.10)
 Fountains and water displays
 (NEC 680.58)
 Spa and hot tubs
 (NEC 680.40)
 Marinas and boat yards
 (NEC 555.3)

Application Opportunities:

Electrical wet locations
 Power generators
 Agricultural equipment
 Portable power skilled trade
 Outdoor electrical equipment
 Cement cutting equipment
 Portable electric heaters
 Submersible pumps
 Pipeline heaters
 Automotive garages
 Industrial part washers
 Outdoor signage
 Vending equipment
 Production assembly power

ORDERING EXAMPLE:

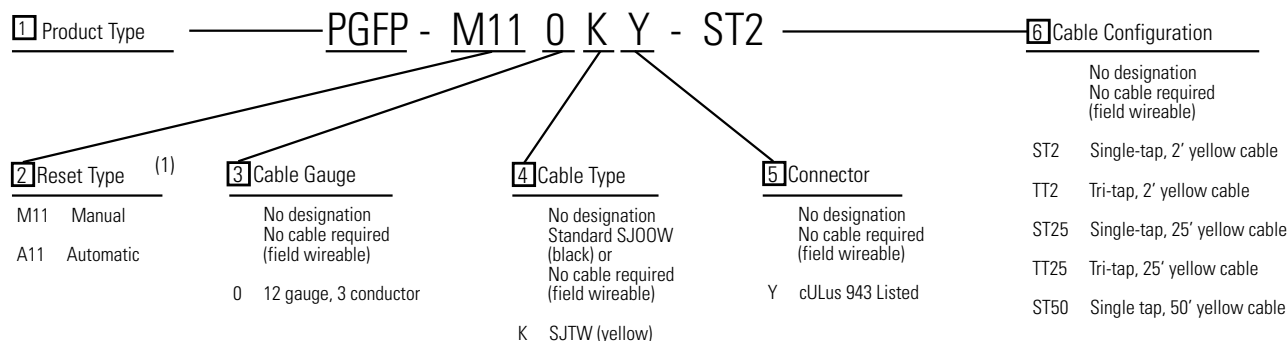

Note:

1. Manual configuration should be specified if automatic power-up, after power restoration of circuit power, could create an unsafe condition.
2. Integrated or replacement cable must be indoor/outdoor 3-conductor cable of type ST, SJT, SE, SJE, SO or SJO
3. Custom cord sets are available. Please consult Airpax for other options

OEM Cordset (SJ00W)

Tri-tap



Field wireable

