



RF CONNECTOR·HEADER

Disconnectable Crimp style connectors and headers

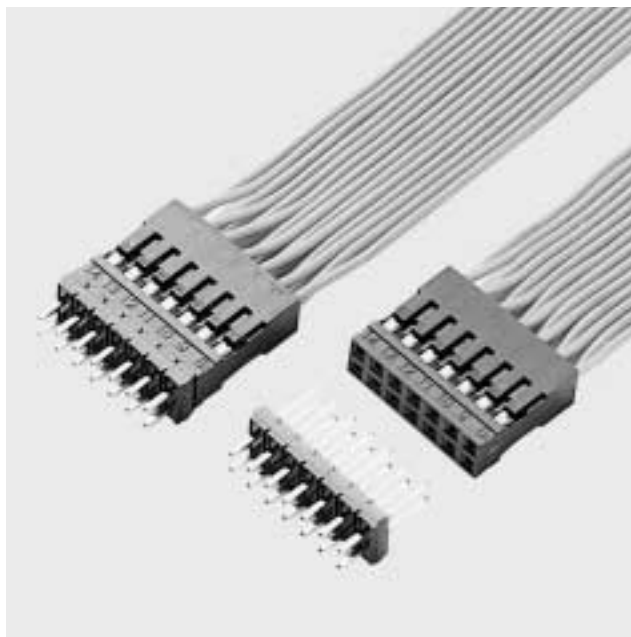

The RF connector was developed as a highly reliable, low-cost crimp style connector for printed circuit boards, and is well suited for internal connections in office automation equipment, such as personal computers, office computers and their peripheral devices.

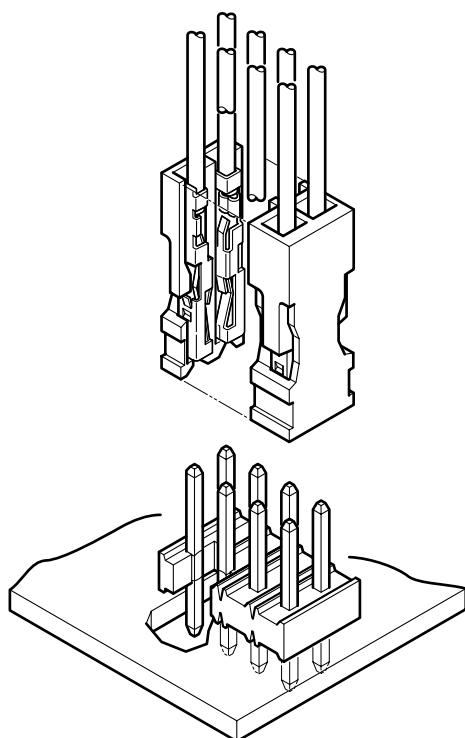

Features

• **Highly reliable, yet low in cost**

Our original double-leaf spring construction withstands the stresses caused by repeated insertions and withdrawals and ensures reliable contact performance. Depending on the application, the socket contacts and header posts can be selectively gold-plated or fully tin-plated to minimize costs.

• **A space-saving, high-density design**

The 2.54mm (.100") pitch contacts are arranged in two rows. The mated connectors can be placed side by side or end to end without a loss in pitch. This facilitates space-saving, high-density circuit designs.

• **Easy connection**

A slight force is all that is required for contact insertion because the housing has resilient lances. Furthermore, the positions of the contacts in the housing can be visually checked. This facilitates insertion of the contacts in the housing.

• **It can be cut to any length to provide a header with any number of circuits**

Notches are provided on the insulator that allow it to be cut to any length without using special tools.

Specifications

- Current rating: 2A AC, DC (AWG #24)
 - Voltage rating: 250V AC, DC
 - Temperature range: (including temperature rise in applying electrical current)
 - 55°C to +105 °C(gold-plated)
 - 55°C to +85°C(tin-plated)
 - Contact resistance: Initial value/15m Ω max.
After environmental testing/30m Ω max.
 - Insulation resistance: 1,000M Ω min.
 - Withstanding voltage: 1,500V AC/minute
 - Applicable wire: AWG #30 to #24
 - Applicable PC board thickness: 1.2 to 1.6mm(.047" to .063")
- * Contact JST for details.

Standards




Recognized E60389



Certified LR20812

Contact

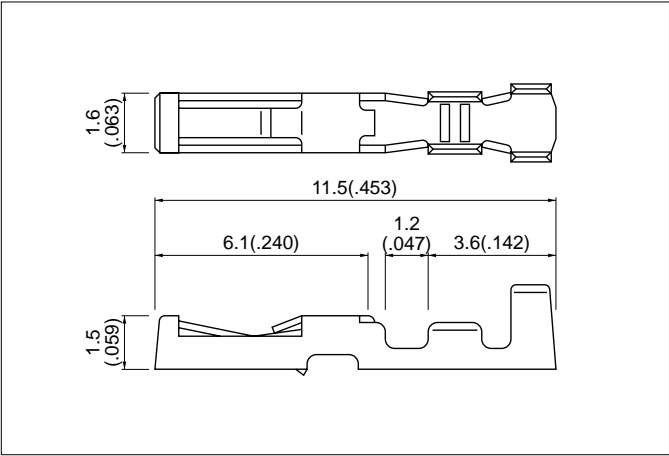


Model No.	Applicable wire			Finish	Q'ty / reel
	mm ²	AWG #	Insulation O.D. mm(in.)		
RF-SC2210	0.06 to 0.22	30 to 24	0.9 to 1.5 (.035 to .059)	Nickel-undercoated, Mating section: Gold-plated	10,000
RF-SC2290				Crimp section: Tin/lead-plated	

Material

Phosphor bronze

Housing

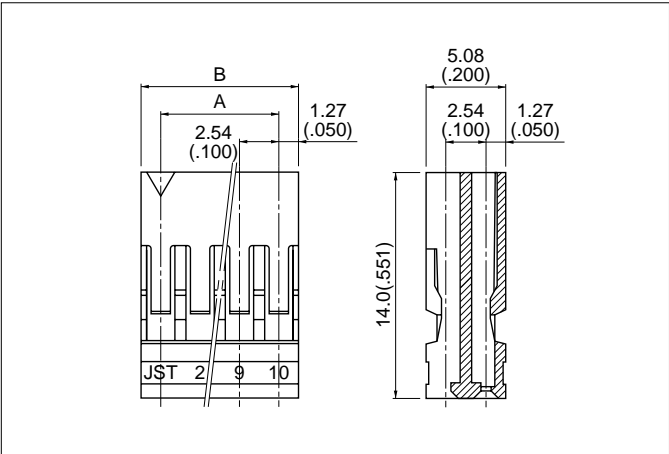

Cir- cuits	Model No.	Dimensions mm(in.)		Q'ty / box
		A	B	
6	RF-06	5.08(.200)	7.62(.300)	500
8	RF-08	7.62(.300)	10.16(.400)	500
10	RF-10	10.16(.400)	12.7 (.500)	500
12	RF-12	12.7 (.500)	15.24(.600)	500
14	RF-14	15.24(.600)	17.78(.700)	300
16	RF-16	17.78(.700)	20.32(.800)	300
20	RF-20	22.86(.900)	25.4 (1.000)	200
28	RF-28	33.02(1.300)	35.56(1.400)	200


Material

PBT, UL94V-0, natural (black)


RF CONNECTOR·HEADER

Header

Top entry type

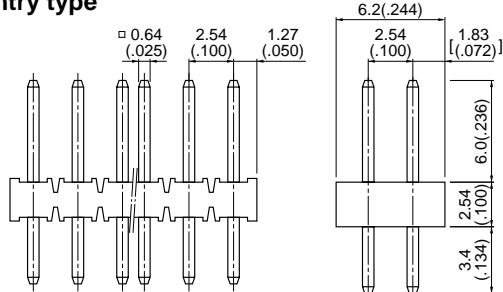

Side entry type

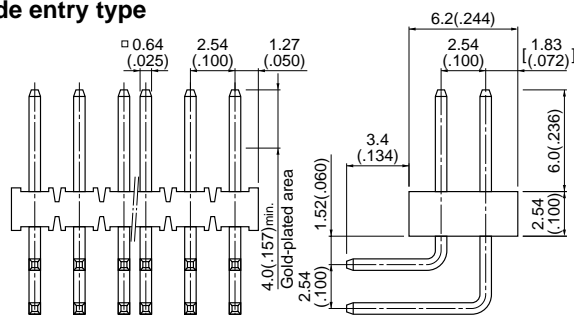

Top entry type

Model No.	Material		Finish
	Wafer	Post	
RF-H(*) 2TD-1130	PBT, UL94V-0, black (natural)	Brass	Nickel-undercoated, gold-plated
RF-H(*) 2TD-1190			Copper-undercoated, tin/lead-plated


Side entry type

Model No.	Material		Finish
	Wafer	Post	
RF-H(*) 2SD-1110	PBT, UL94V-0, black (natural)	Brass	Nickel-undercoated, Mating section: Gold-plated Solder tail: Tin/lead-plated
RF-H(*) 2SD-1190			Copper-undercoated, tin/lead-plated

Note:

1. A two-digit number (02 to 60 even numbers only) representing the number of circuits should be inserted in (*). Determine the number depending on the number of circuits of the housing or header.
2. Contact JST for special products.

Polarizing key

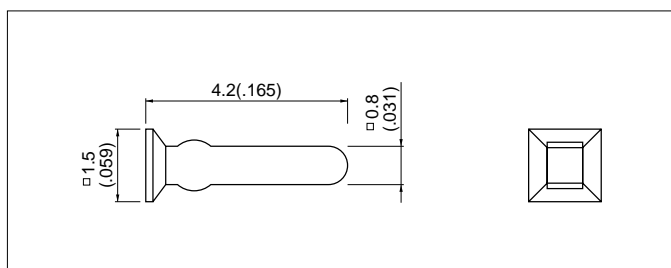



Model No.	Q'ty / bag
PK-RF-1	2,000
Material	
PBT, UL94V-0, natural (white)	

Polarizing key: The polarizing key in the housing prevents misinsertion of the connector to the header.



Note: Not UL approved nor CSA certified.

PC board layout (viewed from soldering side) and Assembly layout

Top entry type



Side entry type



Note:

1. Tolerances are non-cumulative: $\pm 0.05\text{mm} (\pm .002")$ for all centers. Hole dimensions differ according to the kind of PC board and piercing method.
2. The dimensions above should serve as a guideline. Contact JST for details.