



SD3118 Series **Low Profile Power Inductors**

Description

- 125°C maximum total temperature operation
- 3.1mm x 3.1mm x 1.8mm shielded drum core
- Ferrite core material
- Inductance range from 1.0uH to 1000uH
- Current range from 2.94 Amps to 0.083 Amps
- Frequency range up to 4MHz


Applications

- Cellular phones, Digital cameras, CD players, PDA's
- Small LCD displays
- LED driver and LED flash circuits
- Hard disk drives
- Backlighting
- EL panel

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating temperature range: -40°C to +125°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds maximum



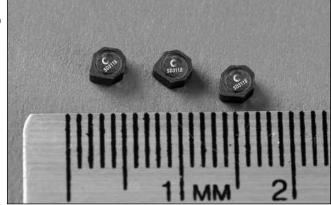

Packaging

Supplied in tape and reel packaging, 4100 per reel

Part Number	Rated	OCL (1)	Part	Irms (2)	Isat (3)	DCR (Ω)	K-factor
	Inductance (µH)	(μH)	Marking Designator	Amperes	Amperes	typ. @ 20°C	(4)
SD3118-1R0-R	1.0	1.04+/-30%	Α	2.01	3.07	0.041	84
SD3118-1R5-R	1.5	1.44+/-30%	В	1.81	2.42	0.051	68
SD3118-2R2-R	2.2	2.12+/-30%	С	1.50	2.00	0.074	57
SD3118-3R3-R	3.3	3.36+/-30%	D	1.22	1.59	0.113	56
SD3118-4R7-R	4.7	4.90+/-30%	E	1.02	1.31	0.162	39
SD3118-6R8-R	6.8	6.72+/-30%	F	0.85	1.12	0.232	32
SD3118-8R2-R	8.2	8.10+/-30%	G	0.81	1.02	0.257	29
SD3118-100-R	10.0	10.4+/-30%	Н	0.75	0.90	0.295	26
SD3118-150-R	15.0	14.9+/-20%	I	0.62	0.75	0.440	21
SD3118-220-R	22.0	22.5+/-20%	J	0.50	0.61	0.676	18
SD3118-330-R	33.0	33.1+/-20%	K	0.41	0.51	0.986	14
SD3118-470-R	47.0	47.5+/-20%	L	0.370	0.42	1.21	12
SD3118-221-R	220.0	221.9+/-20%	M	0.182	0.177	4.77	6
SD3118-331-R	330.0	329.9+/-20%	N	0.146	0.145	7.40	5
SD3118-471-R	470.0	470.1+/-20%	0	0.131	0.122	9.20	4
SD3118-681-R	680.0	680.3+/-20%	Р	0.107	0.101	13.70	3
SD3118-102-R	1000.0	999.4+/-20%	Q	0.087	0.083	20.90	3

⁽¹⁾ Open Circuit Inductance Test Parameters: 100kHz, 0.1V, 0.0Adc.


(3) Isat Amperes peak for approximately 30% rolloff (@20°C)
(4) K-factor: Used to determine B p-p for core loss (see graph).
B p-p = K*L*ΔI, B p-p(mT), K: (K factor from table), L: (Inductance in uH), ΔI (Peak to peak ripple current in Amps).

⁽²⁾ Irms: DC current for an approximate DT of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.







Mechanical Diagrams

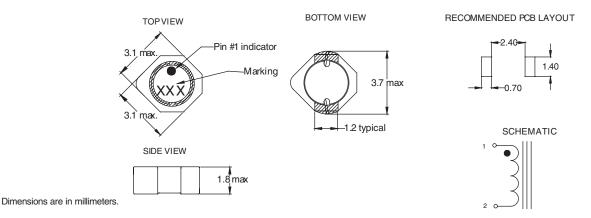


Part Marking: 3 Digit Marking: (1st digit: Indicates inductance value per letter in Part Marking Designator); (2nd digit: Bi-weekly production date code); (3rd digit: Last digit of the year produced).

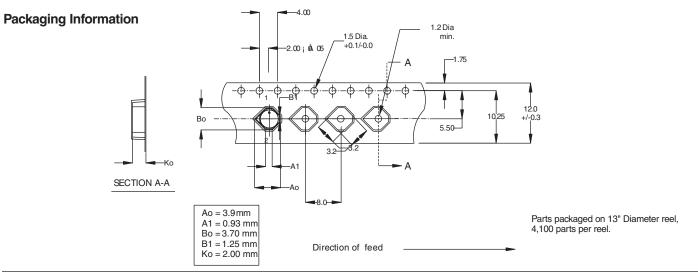


DC Current vs. Temperature

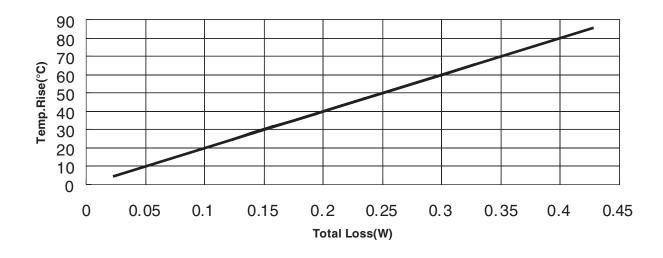






Core Loss

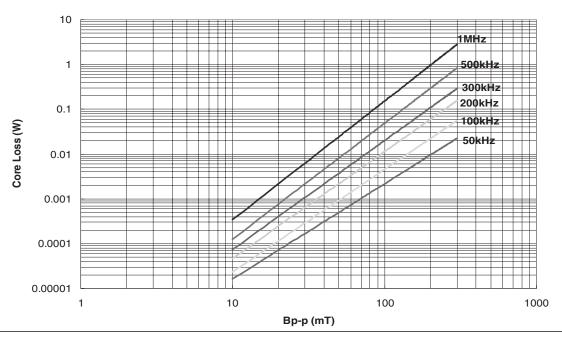

Inductance Characteristics

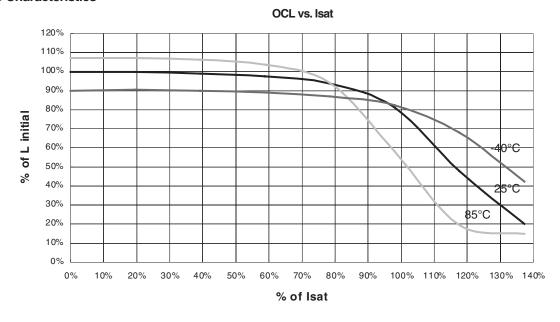



PM-4129 3/07

Visit us on the Web at www.cooperbussmann.com

© Cooper Electronic Technologies 2007 1225 Broken Sound Pkwy. Suite F Boca Raton, FL 33487 Tel: +1-561-998-4100 Toll Free: +1-888-414-2645 Fax: +1-561-241-6640

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.