

Lambda's new SM Series of Power Modules are ideally designed for Telecommunications and Network applications.

Product Specifications

SM20 Series Power Modules

Lambda Electronics, Inc.

515 Broad Hollow Road
Melville, New York 11747

Tel: (516) 694-4200 or Toll Free: (800) LAMBDA-4/5

Fax: (516) 293-0519

REVISION HISTORY

Revision	Date	Description	Program Manager	Quality Manager	Marketing Manager
A	8/7/95	Initial Release	Peter Brune	Dave Wandrey	Mike Wagner
B	8/12/99	Drawings Updated	Peter Brune	Dave Wandrey	Mike Wagner

Table of Contents

	Page
1. COMMON PRODUCT SPECIFICATIONS.....	1
1.1. <u>Regulated Outputs</u>	1
1.2. <u>DC Input Range</u>	2
1.3. <u>Input Voltage Ripple Rejection</u>	2
1.4. <u>Inrush Current</u>	2
1.5. <u>Overshoot</u>	2
1.6. <u>Operating Temperature Range</u>	2
1.7. <u>Overload Protection</u>	3
1.8. <u>Input Line Disturbances</u>	4
1.9. <u>Overvoltage Protection</u>	4
1.10. <u>Cooling</u>	4
1.11. <u>Input, Output, and Mounting Configuration</u>	5
1.12. <u>Remote Functions</u>	5
1.13. <u>Fungus Proofing</u>	5
1.14. <u>Shock, Vibration, and Temperature</u>	5
1.15. <u>Turn ON/OFF Voltages</u>	5
1.16. <u>EMI</u>	6
1.17. <u>Isolation Voltages</u>	6
1.18. <u>Warranty</u>	6
1.19. <u>Regulatory Agency Compliance</u>	6
1.20. <u>Maximum Surface Distortion for Machine Placement</u>	6
1.21. <u>Package, Voltage, and Current Ratings</u>	7
1.22. <u>Efficiency</u>	8
1.23. <u>Physical Data</u>	8
1.24. <u>MTBF</u>	8

1. COMMON PRODUCT SPECIFICATIONS

1.1. Regulated Outputs

PRELOAD: 10% required on all outputs.

- a. Line Regulation, Single Output 0.2% (From Low line to High Line)
- b. Line Regulation, Dual Output..... 0.2% -V to +V (From Low line to High Line)
0.4% -V or +V to common
- c. Load Regulation, Single Output 1.0% Max for output current changes between
10% and 100% of full load.
- d. Load Regulation, Dual Output..... 1.0% Max -V to +V for output current changes between
10% and 100% of full load.
2.0% -V or +V to common for output current changes
between 10% and 100% of full load.
- e. Cross Regulation Dual output models: Current change from 10% to 100%
of full load on positive output will result in less than 3.0%
(Max.) change in the negative output voltage.

(Note: Ripple and noise specifications are differential mode, and measured at the output terminals of the converter utilizing the EIAJ method. All specifications reflect a 20 Mhz. measurement bandwidth.)

- f. Ripple and Noise, Single Output 3.3, 5.0 volt outputs: 75 mVp-p
12 volt outputs: 100 mVp-p
15 volt outputs: 100 mVp-p
- g. Ripple and Noise, Dual Output..... 100 mVp-p
- h. Remote Resistance Programming "TRIM" pin is available which allows $\pm 10\%$
external adjustment of main output voltage via addition of
resistor referenced to either +V or -V terminal.
- i. Remote Voltage Programming All units can be remotely programmed from an external
voltage source by utilizing the "Trim" pin
- j. Temperature Coefficient..... $\pm 0.015\%$ per $^{\circ}\text{C}$, maximum. (measured on center of case)
- k. Output Voltage Drift 0.3% maximum over 8 hour period on main output
(after thermal equilibrium is reached)
- l. Initial Set Point, Single Output..... $\pm 1.0\%$
- m. Initial Set Point, Dual Output..... $\pm 1.0\%$ -V to +V
Output voltage balance at full load: The difference
Between +V to common and -V to common should be
less than $\pm 2\%$ of +V to -V.

- n. Start-Up Time/Capacitive Loading The table below describes the maximum capacitive load for a 10 ms start-up under all input line conditions with a 100% resistive load. And It also states the maximum output capacitance allowed.

Output Capacitance Condition	Single Output				Dual Output	
	3.3V	5.0V	12V	15V	±12	±15
Max Capacitance for 10 mS Start up	1,000 μ F	1,000 μ F	220 μ F	220 μ F	110 μ F	110 μ F
Max Capacitance allowed	10,000 μ F	10,000 μ F	2,600 μ F	2,600 μ F	1,000 μ F	1,000 μ F

- o. Transient Response After the application of 25% step load change in output current, output voltage will stay within 2% of preset value, recovering to within 1% in less than 1 millisecond after application of transient (typical).
- p. Operating Modes Units can be operated in series

1.2. DC Input Range

- a. 24 Volt Nominal DC Input 18.0 - 36.0 Vdc, at 1 Vp-p ripple
- b. 48 Volt Nominal DC Input 36.0 - 75.0 Vdc, at 1 Vp-p ripple

1.3. Input Voltage Ripple Rejection

f = 100 Hz Sinewave, 1 Vp-p, Vi = Nominal Input
IVR = Min 45 db, typical 60 db

1.4. Inrush Current


All modules meet the requirements for inrush current as specified by ETSI -300-132. Max surge current as defined by ETSI-300-132 is 48 Amps.

1.5. Overshoot

No output overshoots at turn on, turn off, or power failure.

1.6. Operating Temperature Range

- a. Ambient -40 to +60°C (Natural Convection)

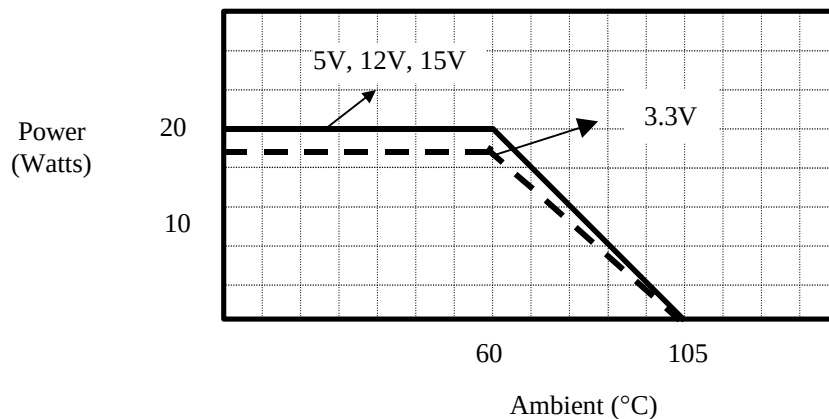


- b. Case Temperature -40 to +105°C
- c. Storage Temperature -55 to +125°C

1.7. Overload Protection

- a. An overload or a short circuit condition **cannot** exceed 30 seconds (@ Nominal Input, +25°C).

Typical Fold Back Curve

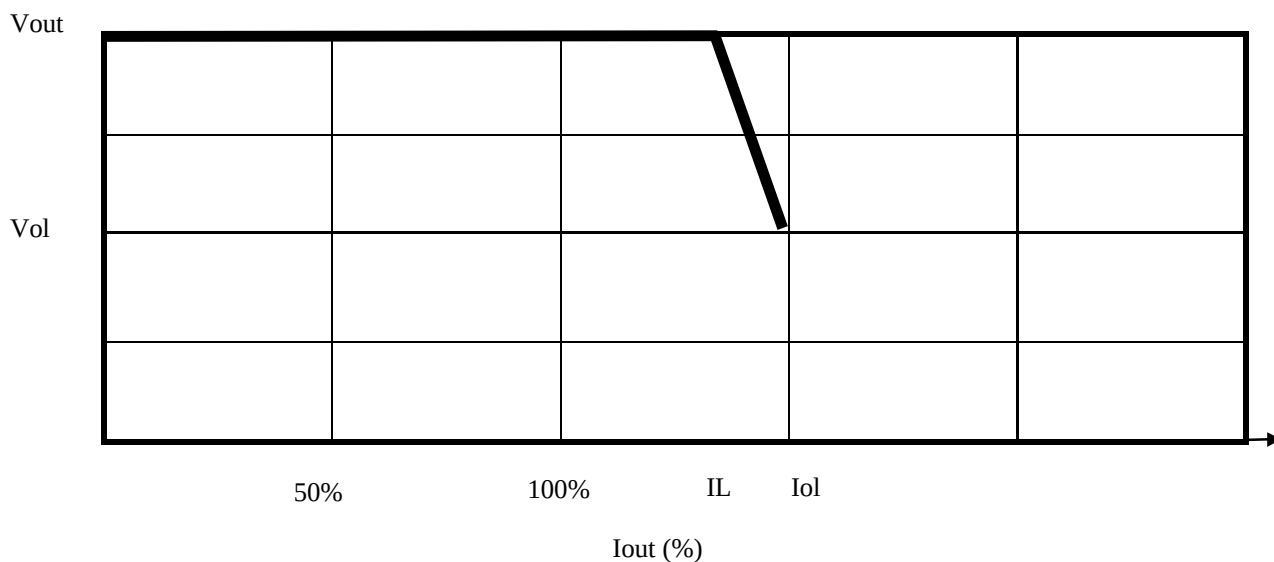

24V Input Model						
	Single Output				Dual Output	
Output Voltage	3.3V	5.0V	12V	15V	±12V	±15V
Output Current (100%)	5.0	4.0	1.66	1.33	0.84	0.66
IL (Current Limit)	6.50A	5.0A	2.0A	1.70A	1.20A	1.10A
Vol (Over Load)	0.80V	0.50V	4.50V	2.50V	1.0V	6.0V
Iol (Over Load)	7.5A	6.0A	2.4A	2.2A	1.70A	1.20A
Vsc (Short Circuit)	100 mV	100 mV	100 mV	100 mV	100 mV	100 mV
Isc (Short Circuit)	7.96A	6.32A	2.71A	2.26A	1.22A	1.03A

Output Voltage	3.3V	5.0V	12V	15V	±12V	±15V
Output Current (100%)	5.0	4.0	1.66	1.33	0.84	0.66
IL (Current Limit)	6.25A	5.0A	2.20A	1.70A	1.0A	1.1A
Vol (Over Load)	1.0V	1.0V	2.50V	6.0V	0.50V	4.0V
Iol (Over Load)	7.0A	5.50A	2.30A	1.70A	1.50A	1.20A
Vsc (Short Circuit)	100 mV	100 mV	100 mV	100 mV	100 mV	100 mV
Isc (Short Circuit)	7.38A	5.86A	2.47A	2.06A	1.18A	1.00A

- b. Fusing:..... External Fusing is recommended.
- | | |
|-----------|---------|
| 24V model | 2.0 Amp |
| 48V model | 1.0 Amp |

1.8. Input Line Disturbances

24 Volt Input Models..... 50 volts for 100 ms

48 Volt Input Models..... 100 volts for 100 ms.
100 volt, 10joule pulse per ETSI ETS 300 132
requirements with external filter.

1.9. Overvoltage Protection

Single and Dual Output Models: Overvoltage protection clamps output at predetermined level in the event of an internal sensing circuit or feedback loop failure.

Overvoltage Protection Levels:

<u>Vo(nom)</u>	<u>OV Clamp Point Range</u>
3.3 volts	4.0-4.8 volts
5.0 volts	6.0-7.25 volts
12.0 volts	13.4-16.35 volts
15.0 volts	17.0-19.20 volts
± 12 volts	26.8-30.21volts
± 15 volts	32.30-40.20 volts

1.10. Cooling

Natural Convection

1.11. Input, Output, and Mounting Configuration

Input/output pin configuration. (See SM Instruction Manual.)

All units are designed for printed circuit board mounting via reflow. (See SM Instruction Manual.)

1.12. Remote Functions

- a. Sensing Remote sensing not available
- b. Turn On/Turn Off Remote on/off pin referenced to negative input terminal.
Open enables operation of converter, a closed circuit shuts operation down.

Input current with converter inhibited: 5 mA, maximum
- c. Remote Monitoring None

1.13. Fungus Proofing

No fungus nutrient materials utilized.

1.14. Shock, Vibration, and Temperature

- a. Vibration..... 2.5 G-rms, 10 Hz - 500 Hz sweep vibration, 1 hour per axis.
- b. Mechanical Shock..... IEC68-2-27
- c. Drop Test..... GR63-CORE
- d. Relative Humidity 5% to 95%, non-condensing
- e. Altitude..... 10,000 feet maximum operating 45,000 feet storage.
- f. Thermal Cycle..... One hour at -20°C (case temperature).
One hour at +20°C (case temperature).
One hour at +100°C (case temperature).
Repeat for minimum of 10 cycles with no damage to unit.
(Ramped at 5°C/minute, maximum with load derated as required).
- g. Max Solder Temp/Time See Instruction Manual

1.15. Turn ON/OFF Voltages

- 24V Input..... Turn on 16.5 to 18 Volts
Turn off 15 to 17 Volts
Hysteresis .5 Volts min
- 48V Input..... Turn on 34.5 to 36 Volts
Turn off 30 to 33.5 Volts
Hysteresis .5 Volts min

1.16. **EMI**

Radiated and Conducted input EMI spectra meets the following requirements with recommended external filter. (See Instruction Manual for further information.)

EMI Specification

ALL	Required	EN55022 (Level B), FCC Part 15 (Level B), ANSI 63.12-1987 (as called out in Bellcore TA-NWT-001089, issue 2)
Radiated EMI		Bellcore GR 1089. Electro-Magnetic fields > 30 Mhz Frequency range 1 - 12 Ghz Voltage level - 10Vrms/m 30 - 230 Mhz - 30dB uV/M 230 - 1,000 Mhz - 35dB uV/M 1Mhz - 10 Ghz - 46dB uV/M
ESD.....		All SM modules, when installed per recommended methods, will meet the requirements of ENC61000-4-2, severity levels 3 and 4.

1.17. **Isolation Voltages**

- a. Input to Output (48 Volt Input)..... 900 VAC
1500 VDC
- b. Input to Output (24 Volt Input)..... 500 VAC
700 VDC
- c. Isolation Resistance 10⁶ Ohms, minimum

1.18. **Warranty**

2 years, parts and labor.

1.19. **Regulatory Agency Compliance**

All converters will meet the requirements of the following standards, assuming a line isolated, ELV or SELV, front end input voltage; UL1950 Third Edition CAN/CSA 22.2 No. 950-95, EN60950. The CE mark on the product is applied to show conformance to the requirements outlined in the European Union's low voltage directive (72/23/EEC) as amended by the CE mark directive (93/68/EEC).

1.20. **Maximum Surface Distortion for Machine Placement**

Coplanarity 0.006 inches

1.21. Package, Voltage, and Current Ratings

(Models Available)

Model	Package Size (inches)	Nom. Input Voltage (volts)	Nom. Output Voltage (volts)	Max. Output Current @ 105°C Case (amps)
SM20-24S03	1.80 x 1.80x0.4	24	3.3	5.00
SM20-24S05	1.80 x 1.80x0.4	24	5.0	4.00
SM20-24S12	1.80 x 1.80x0.4	24	12.0	1.66
SM20-24S15	1.80 x 1.80x0.4	24	15.0	1.33
SM20-24D12	1.80 x 1.80 x 0.4	24	± 12	0.83
SM20-24D15	1.80 x 1.80 x 0.4	24	± 15	0.67
SM20-48S03	1.80 x 1.80 x 0.4	48	3.3	5.00
SM20-48S05	1.80 x 1.80 x 0.4	48	5.0	4.00
SM20-48S12	1.80 x 1.80 x 0.4	48	12.0	1.66
SM20-48S15	1.80 x 1.80 x 0.4	48	15.0	1.33
SM20-48D12	1.80 x 1.80 x 0.4	48	±12	0.83
SM20-48D15	1.80 x 1.80 x 0.4	48	±15	0.67

