

SMT Power Inductors



Model PM43 Series is currently available, although not recommended for new designs. [Model SDR0403](#) is preferred.

Special Features

- High current capacity
- Ferrite bobbin core
- Low core loss for high frequency power applications
- Low profile
- Compact size
- Large terminal surface for good PCB bonding
- Operating temperature -40 to +100 °C
- Tape & reel packaged 1500/reel


Notes

- * Current to cause max. 10 % of inductance drop or 40 °C temperature rise

† RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

PM43 Series							
Part	L (μH)	Test	SRF	DCR	I, DC*	Bourns	
Number	±20 %	Freq.	(MHz)	Ω	(A)	Equivalent	
		(MHz)	Typ.	Max.			
PM43-1R0M-RC	1.0	7.96	113	0.049	2.56	SDR0403	
PM43-1R4M-RC	1.4	7.96	101	0.057	2.52		
PM43-1R8M-RC	1.8	7.96	92	0.064	1.95		
PM43-2R2M-RC	2.2	7.96	76	0.072	1.75		
PM43-2R7M-RC	2.7	7.96	66	0.079	1.58		
PM43-3R3M-RC	3.3	7.96	63	0.087	1.44		
PM43-3R9M-RC	3.9	7.96	53	0.094	1.33		
PM43-4R7M-RC	4.7	7.96	49	0.109	1.15		
PM43-5R6M-RC	5.6	7.96	43	0.126	0.99		
PM43-6R8M-RC	6.8	7.96	41	0.132	0.95		
PM43-8R2M-RC	8.2	7.96	35	0.147	0.84		
PM43-100M-RC	10	2.52	35	0.182	1.04		
PM43-120M-RC	12	2.52	32	0.210	0.97		
PM43-150M-RC	15	2.52	29	0.235	0.85		
PM43-180M-RC	18	2.52	27	0.338	0.74		
PM43-220M-RC	22	2.52	24	0.378	0.68		
PM43-270M-RC	27	2.52	21	0.522	0.62		
	±10 %						
PM43-330K-RC	33	2.52	19	0.540	0.56		
PM43-390K-RC	39	2.52	18	0.587	0.52		
PM43-470K-RC	47	2.52	15	0.844	0.44		
PM43-560K-RC	56	2.52	14	0.937	0.42		
PM43-680K-RC	68	2.52	13	1.117	0.37		

"-RC" suffix indicates RoHS compliance.

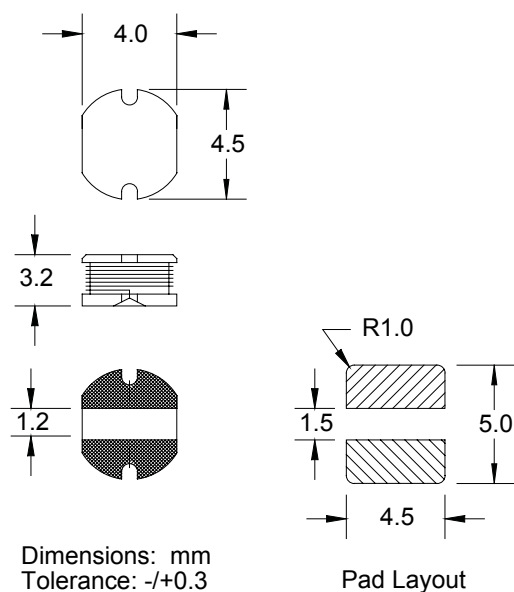

BOURNS®

Tel. (877) 426-8767 • Fax (951) 781-5006

www.bourns.com