

SMT Power Inductors



Model PM54 Series is currently available, although not recommended for new designs. [Model SDR0604](#) is preferred.

Special Features

- High current capacity
- Ferrite bobbin core
- Low core loss for high frequency power application
- Compact size
- Large terminal surface for good PCB bonding
- Operating temperature -30 to +100 °C
- Tape & reel packaged 1500/reel


Notes

- * Current to cause max. 10 % of inductance drop, or 40 °C temperature rise

† RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

PM54 Series						
Part Number	L (μH) ±20 %	Test Freq.	SRF (MHz) Typ.	DCR Ω Max.	I, DC* (A)	Bourns Equivalent
PM54-100M-RC	10	2.52 MHz	30	0.10	1.44	SDR0604
PM54-120M-RC	12	2.52 MHz	27	0.12	1.40	
PM54-150M-RC	15	2.52 MHz	25	0.14	1.30	
PM54-180M-RC	18	2.52 MHz	23	0.15	1.23	
PM54-220M-RC	22	2.52 MHz	19	0.18	1.11	
PM54-270M-RC	27	2.52 MHz	17	0.20	0.97	
	±15 %					
PM54-330L-RC	33	2.52 MHz	16	0.23	0.88	
PM54-390L-RC	39	2.52 MHz	15	0.32	0.80	
PM54-470L-RC	47	2.52 MHz	13	0.37	0.72	
	±10 %					
PM54-560K-RC	56	2.52 MHz	12	0.42	0.68	
PM54-680K-RC	68	2.52 MHz	11	0.46	0.61	
PM54-820K-RC	82	2.52 MHz	10	0.60	0.58	
PM54-101K-RC	100	1 KHz	9	0.70	0.52	
PM54-121K-RC	120	1 KHz	8	0.93	0.48	
PM54-151K-RC	150	1 KHz	8	1.10	0.40	
PM54-181K-RC	180	1 KHz	6	1.38	0.38	
PM54-221K-RC	220	1 KHz	5	1.57	0.35	

“-RC” suffix indicates RoHS compliance.

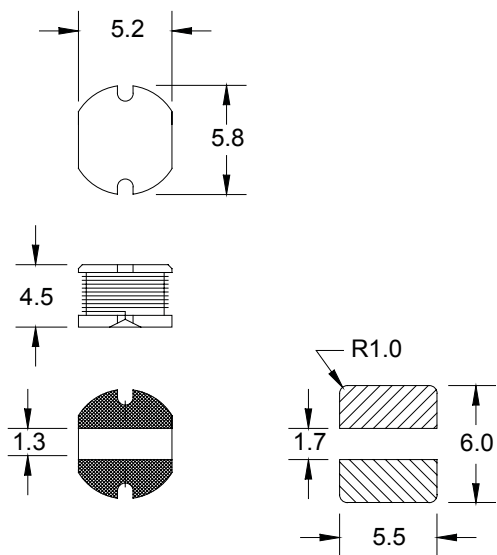

Dimensions: mm
Tolerance: -/+0.35

Pad Layout

BOURNS®

Tel. (877) 426-8767 • Fax (951) 781-5006

www.bourns.com