

UNR121x Series (UN121x Series)

Silicon NPN epitaxial planar type

For digital circuits

■ Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts
- M type package allowing easy automatic and manual insertion as well as stand-alone fixing to the printed circuit board

■ Resistance by Part Number


	(R ₁)	(R ₂)
• UNR1210 (UN1210)	47 kΩ	—
• UNR1211 (UN1211)	10 kΩ	10 kΩ
• UNR1212 (UN1212)	22 kΩ	22 kΩ
• UNR1213 (UN1213)	47 kΩ	47 kΩ
• UNR1214 (UN1214)	10 kΩ	47 kΩ
• UNR1215 (UN1215)	10 kΩ	—
• UNR1216 (UN1216)	4.7 kΩ	—
• UNR1217 (UN1217)	22 kΩ	—
• UNR1218 (UN1218)	0.51 kΩ	5.1 kΩ
• UNR1219 (UN1219)	1 kΩ	10 kΩ
• UNR121D (UN121D)	47 kΩ	10 kΩ
• UNR121E (UN121E)	47 kΩ	22 kΩ
• UNR121F (UN121F)	4.7 kΩ	10 kΩ
• UNR121K (UN121K)	10 kΩ	4.7 kΩ
• UNR121L (UN121L)	4.7 kΩ	4.7 kΩ

■ Absolute Maximum Ratings T_a = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	V _{CBO}	50	V
Collector-emitter voltage (Base open)	V _{CEO}	50	V
Collector current	I _C	100	mA
Total power dissipation	P _T	400	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

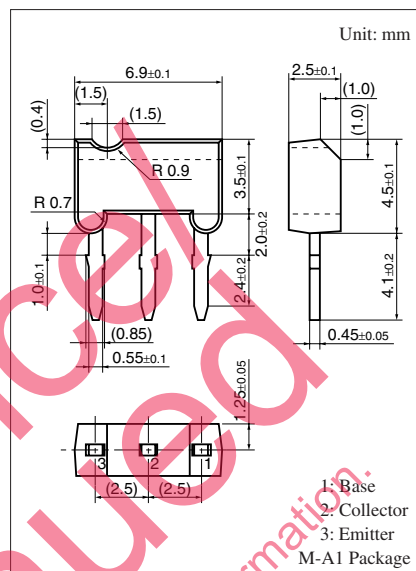

Internal Connection

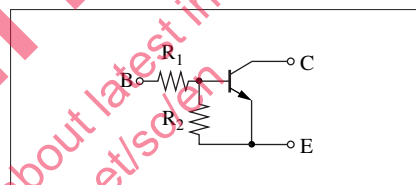

Note) The part numbers in the parenthesis show conventional part number.

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$


Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Collector-base voltage (Emitter open)		V_{CBO}	$I_C = 10\ \mu\text{A}$, $I_E = 0$	50			V
Collector-emitter voltage (Base open)		V_{CEO}	$I_C = 2\ \text{mA}$, $I_B = 0$	50			V
Collector-base cutoff current (Emitter open)		I_{CBO}	$V_{CB} = 50\ \text{V}$, $I_E = 0$			0.1	μA
Collector-emitter cutoff current (Base open)		I_{CEO}	$V_{CE} = 50\ \text{V}$, $I_B = 0$			0.5	μA
Emitter-base cutoff current (Collector open)	UNR1211	I_{EBO}	$V_{EB} = 6\ \text{V}$, $I_C = 0$			0.5	mA
	UNR1212/1214/121D/121E					0.2	
	UNR1213					0.1	
	UNR1210/1215/1216/1217					0.01	
	UNR121F/121K					1.0	
	UNR1219					1.5	
	UNR1218/121L					2.0	
Forward current transfer ratio	UNR1211	h_{FE}	$V_{CE} = 10\ \text{V}$, $I_C = 5\ \text{mA}$	35			—
	UNR1212/121E			60			
	UNR1213/1214			80			
	UNR1210*/1215*/1216*/1217*			160		460	
	UNR1219/121D/121F			30			
	UNR1218/121K/121L			20			
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = 10\ \text{mA}$, $I_B = 0.3\ \text{mA}$			0.25	V
Output voltage high-level		V_{OH}	$V_{CC} = 5\ \text{V}$, $V_B = 0.5\ \text{V}$, $R_L = 1\ \text{k}\Omega$	4.9			V
Output voltage low-level		V_{OL}	$V_{CC} = 5\ \text{V}$, $V_B = 2.5\ \text{V}$, $R_L = 1\ \text{k}\Omega$			0.2	V
			$V_{CC} = 5\ \text{V}$, $V_B = 3.5\ \text{V}$, $R_L = 1\ \text{k}\Omega$				
			$V_{CC} = 5\ \text{V}$, $V_B = 10\ \text{V}$, $R_L = 1\ \text{k}\Omega$				
			$V_{CC} = 5\ \text{V}$, $V_B = 6\ \text{V}$, $R_L = 1\ \text{k}\Omega$				
Transition frequency		f_T	$V_{CB} = 10\ \text{V}$, $I_E = -2\ \text{mA}$, $f = 200\ \text{MHz}$		80		MHz
Input resistance	UNR1211/1214/1215/121K	R_1		-30%	10	+30%	k Ω
	UNR1212/1217				22		
	UNR1210/1213/121D/121E				47		
	UNR1216/121F/121L				4.7		
	UNR1218				0.51		
	UNR1219				1		
Resistance ratio	UNR1211/1212/1213/121L	R_1/R_2		0.8	1.0	1.2	—
	UNR1214			0.17	0.21	0.25	
	UNR1218/1219			0.08	0.1	0.12	
	UNR121D				4.7		
	UNR121E				2.14		
	UNR121F				0.47		
	UNR121K				2.13		

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.







2. *: Rank classification (UNR1110/1115/1116/1117)

Rank	Q	R	S
h_{FE}	160 to 260	210 to 340	290 to 460


Common characteristics chart

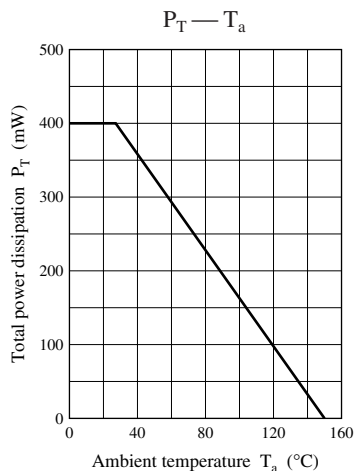


Characteristics charts of UNR1210

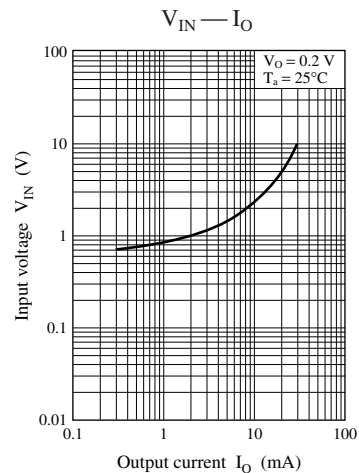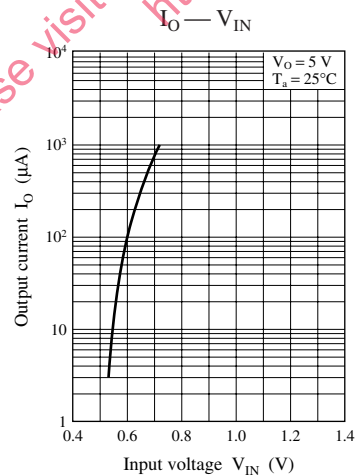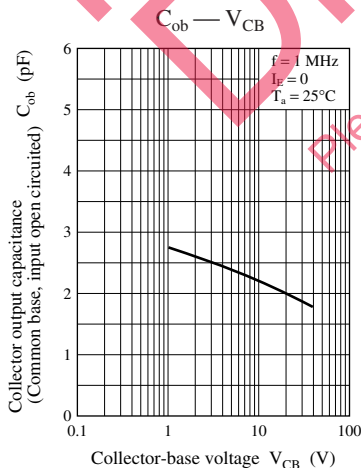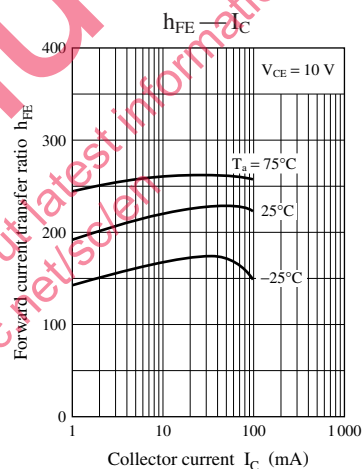
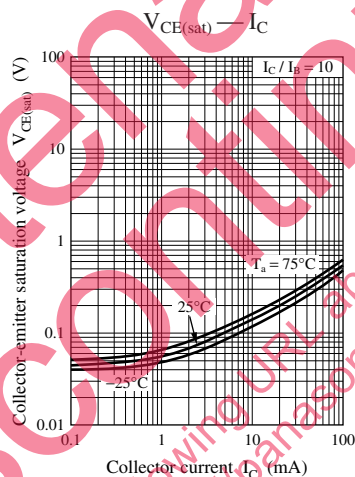
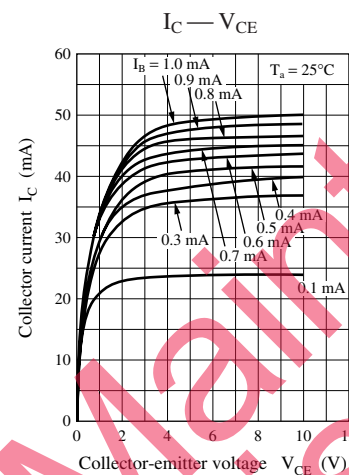


Characteristics charts of UNR1211






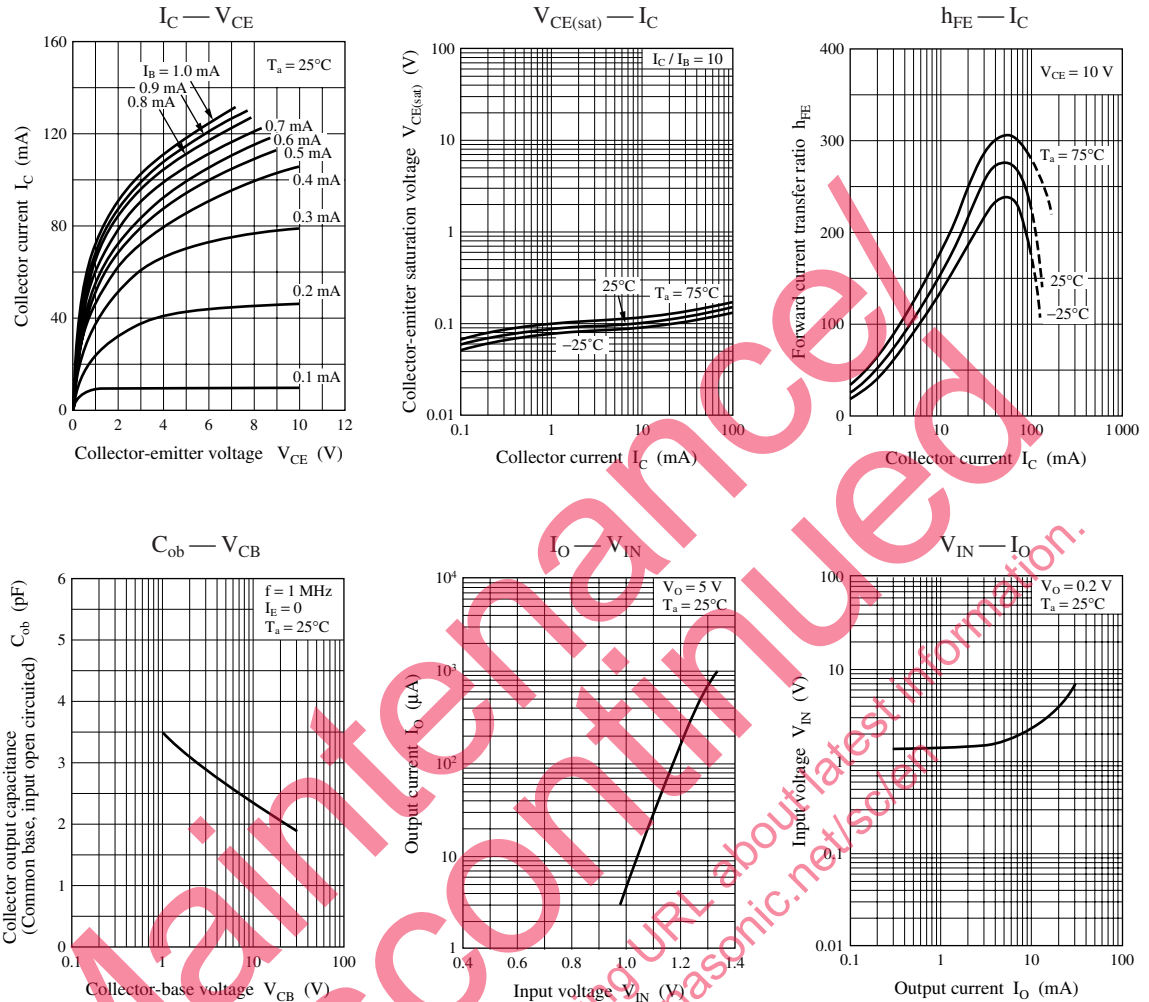


Characteristics charts of UNR1212

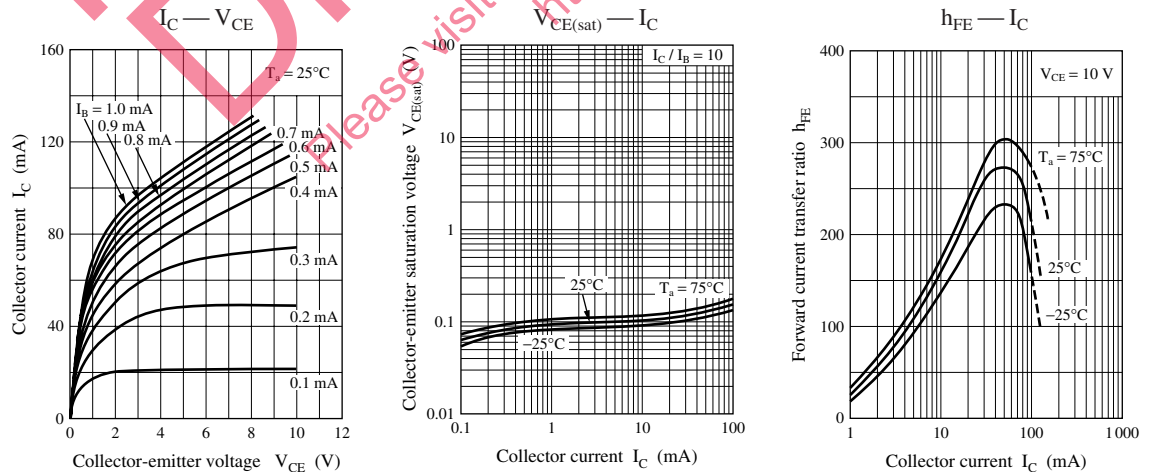


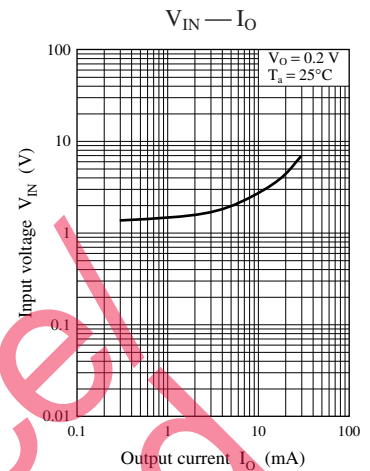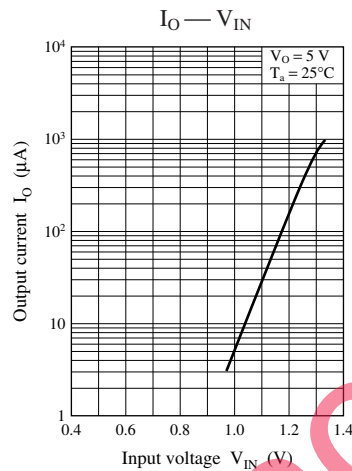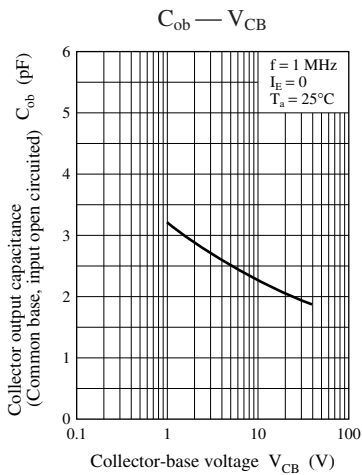


Characteristics charts of UNR1213

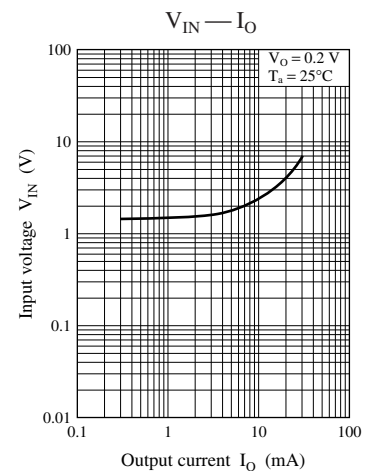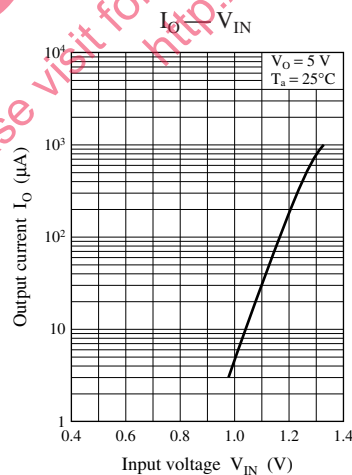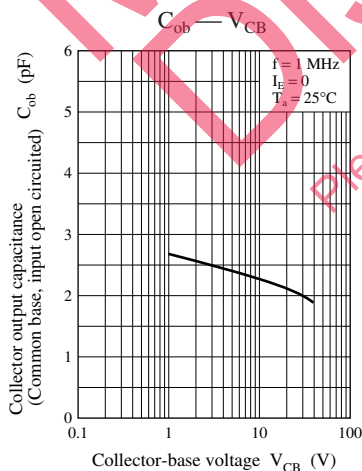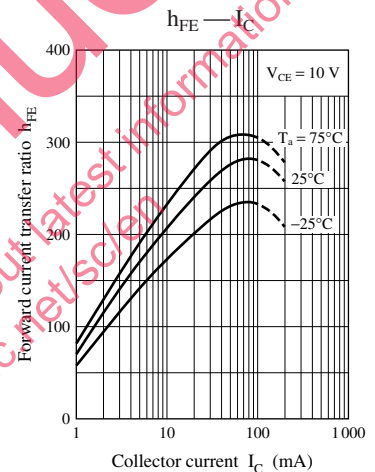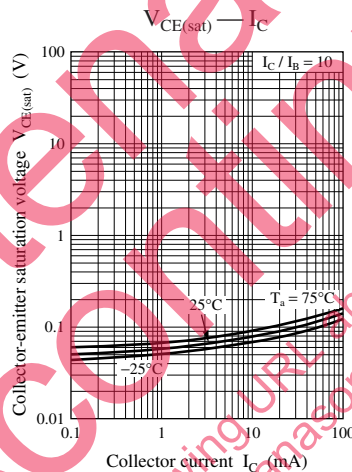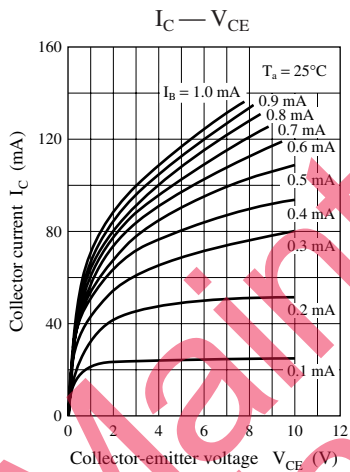


Characteristics charts of UNR1214

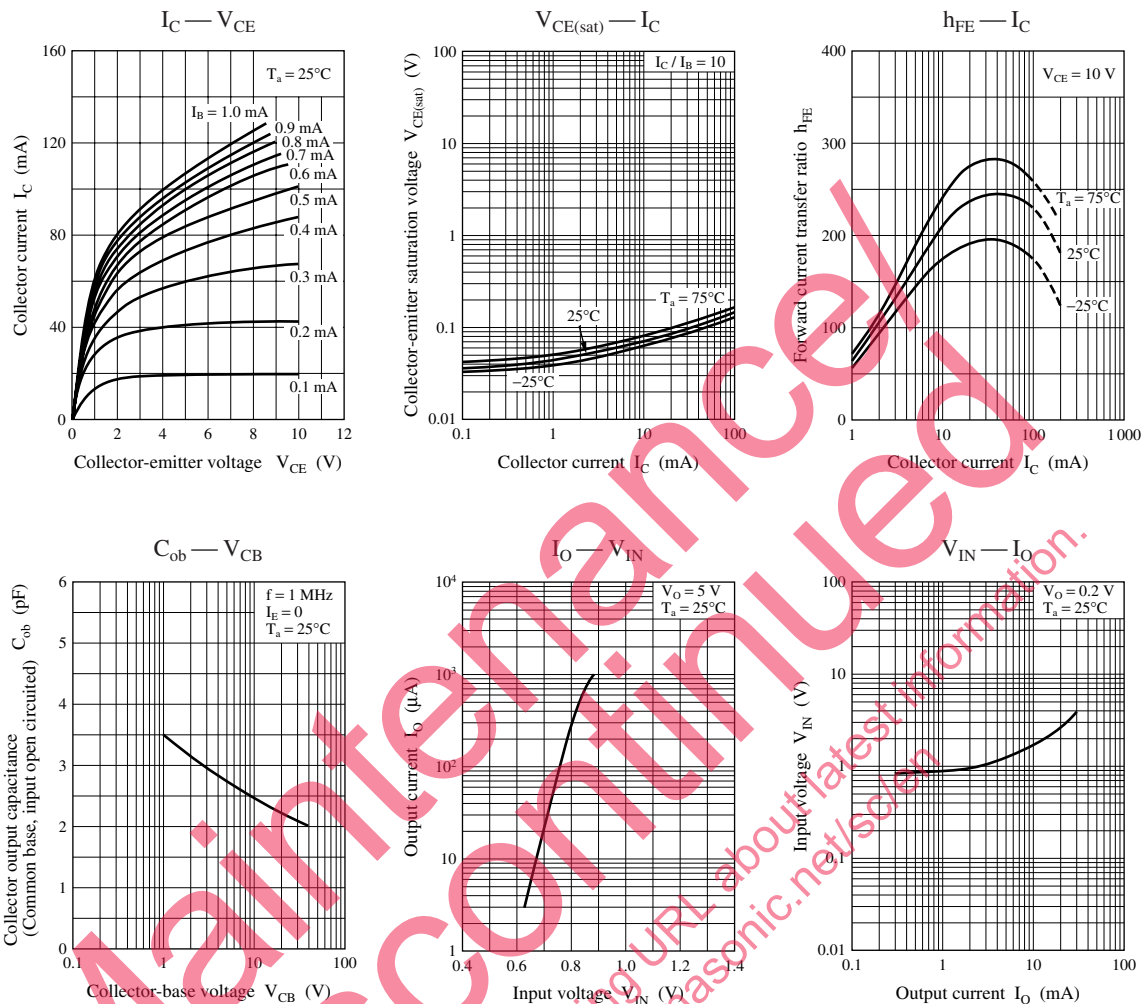


Characteristics charts of UNR1215

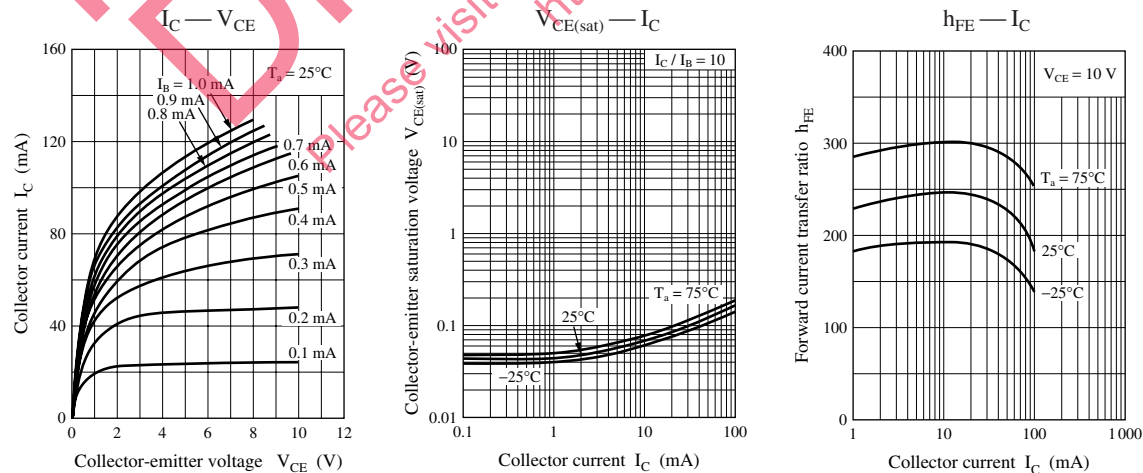


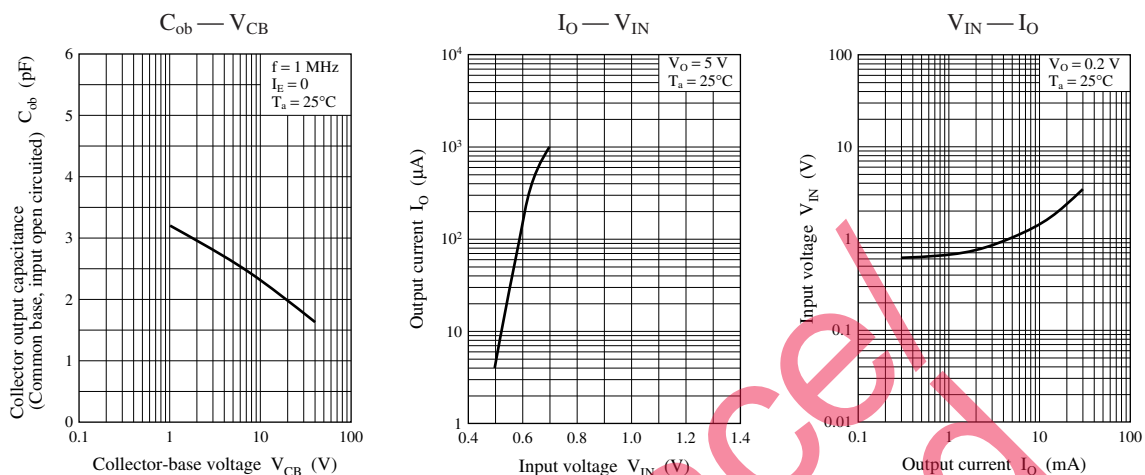


Characteristics charts of UNR1216

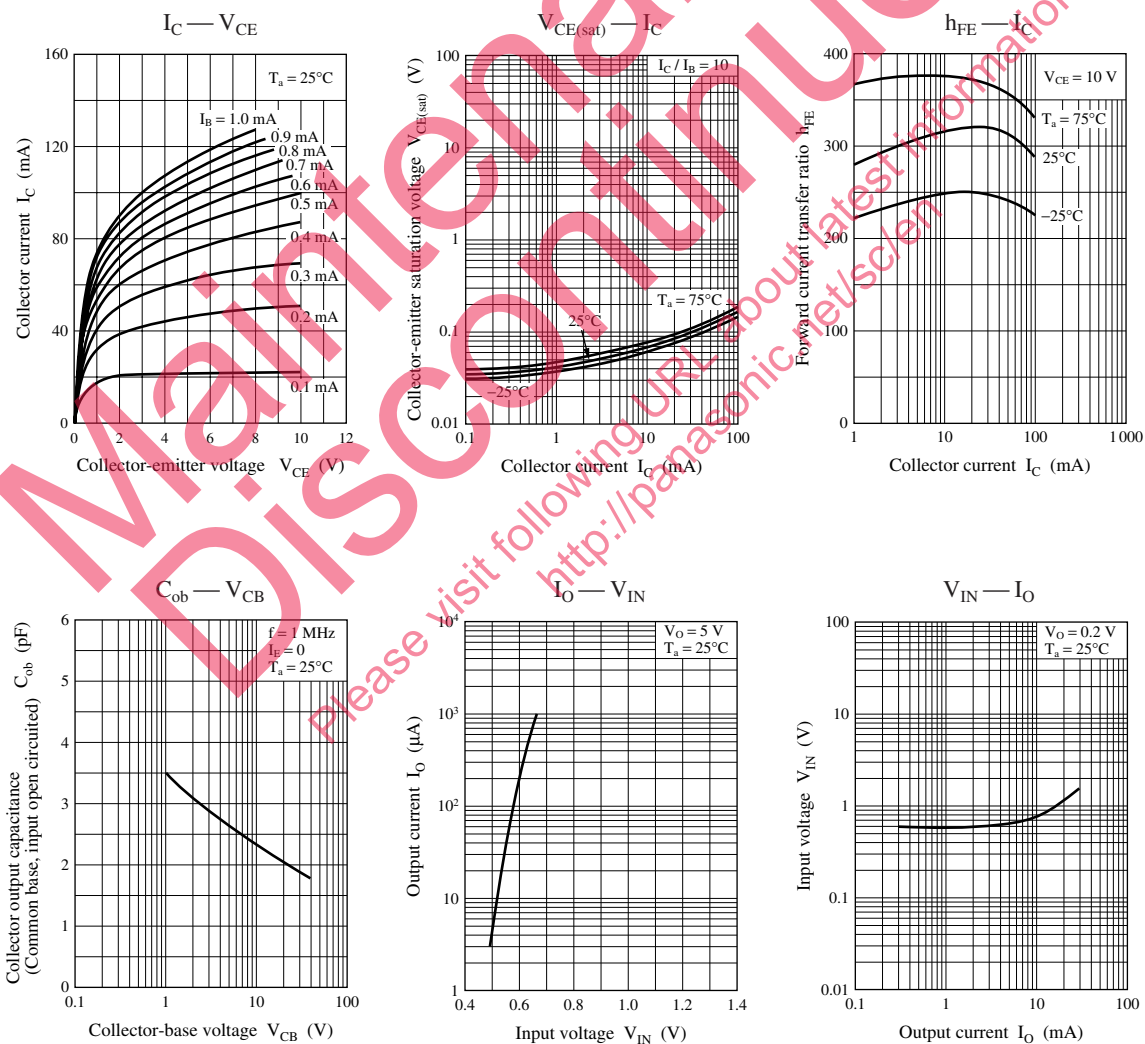


Characteristics charts of UNR1217

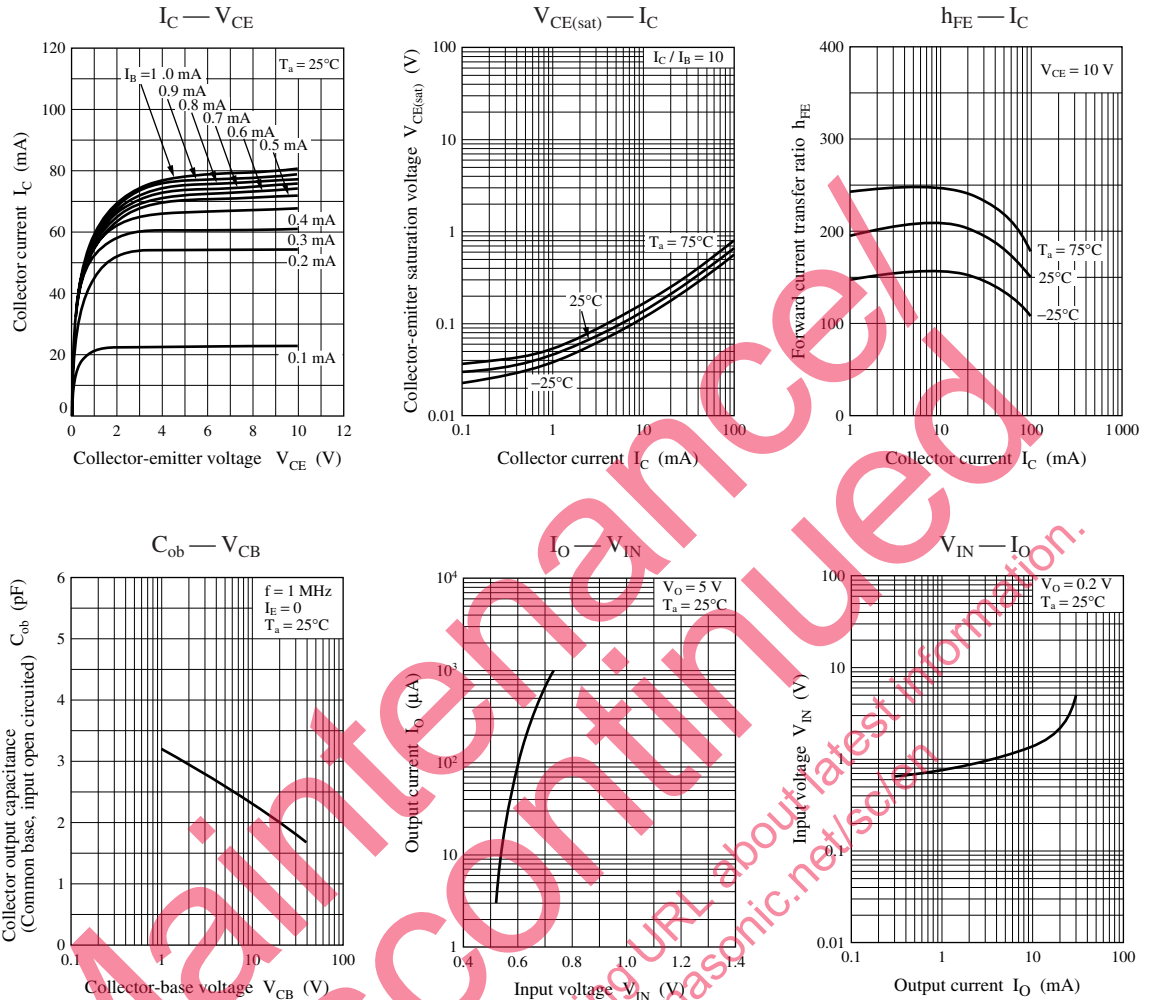


Characteristics charts of UNR1218

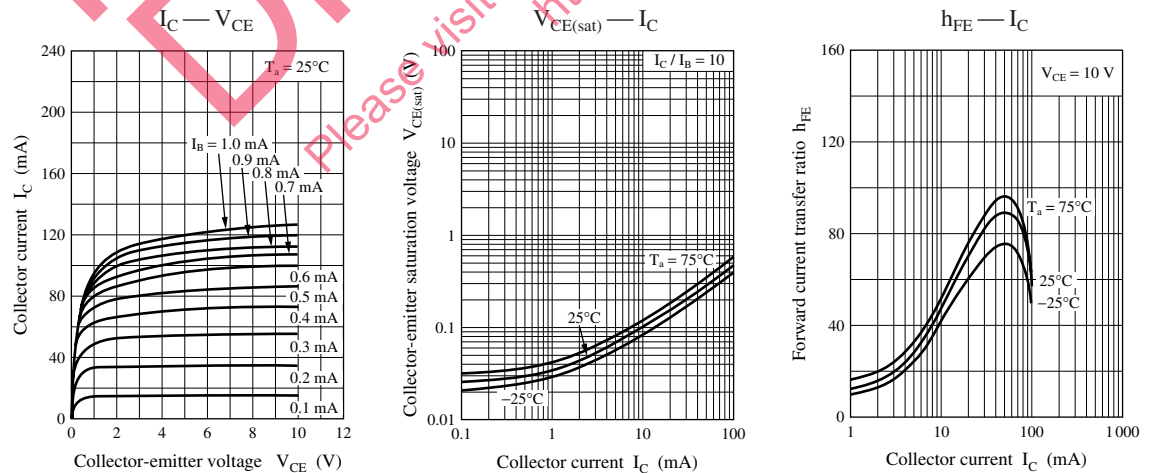


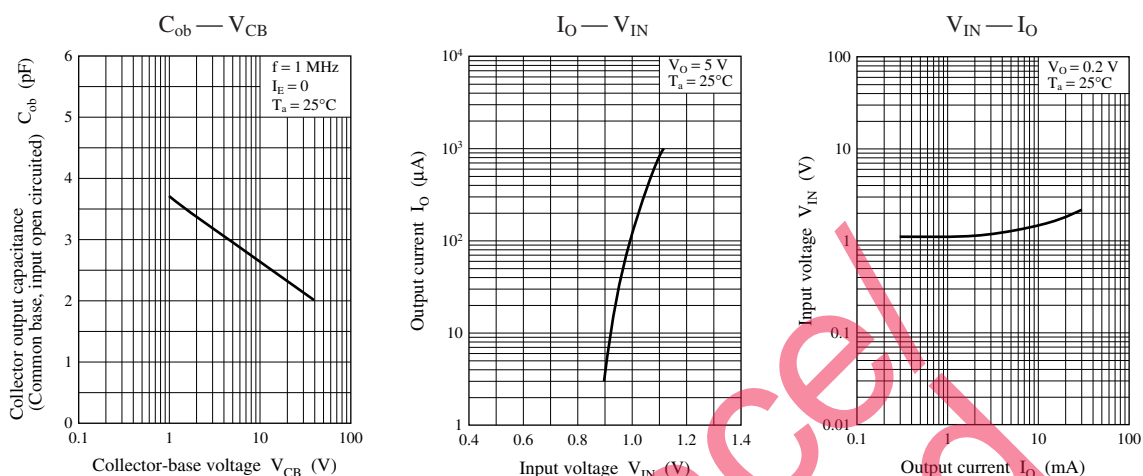


Characteristics charts of UNR1219

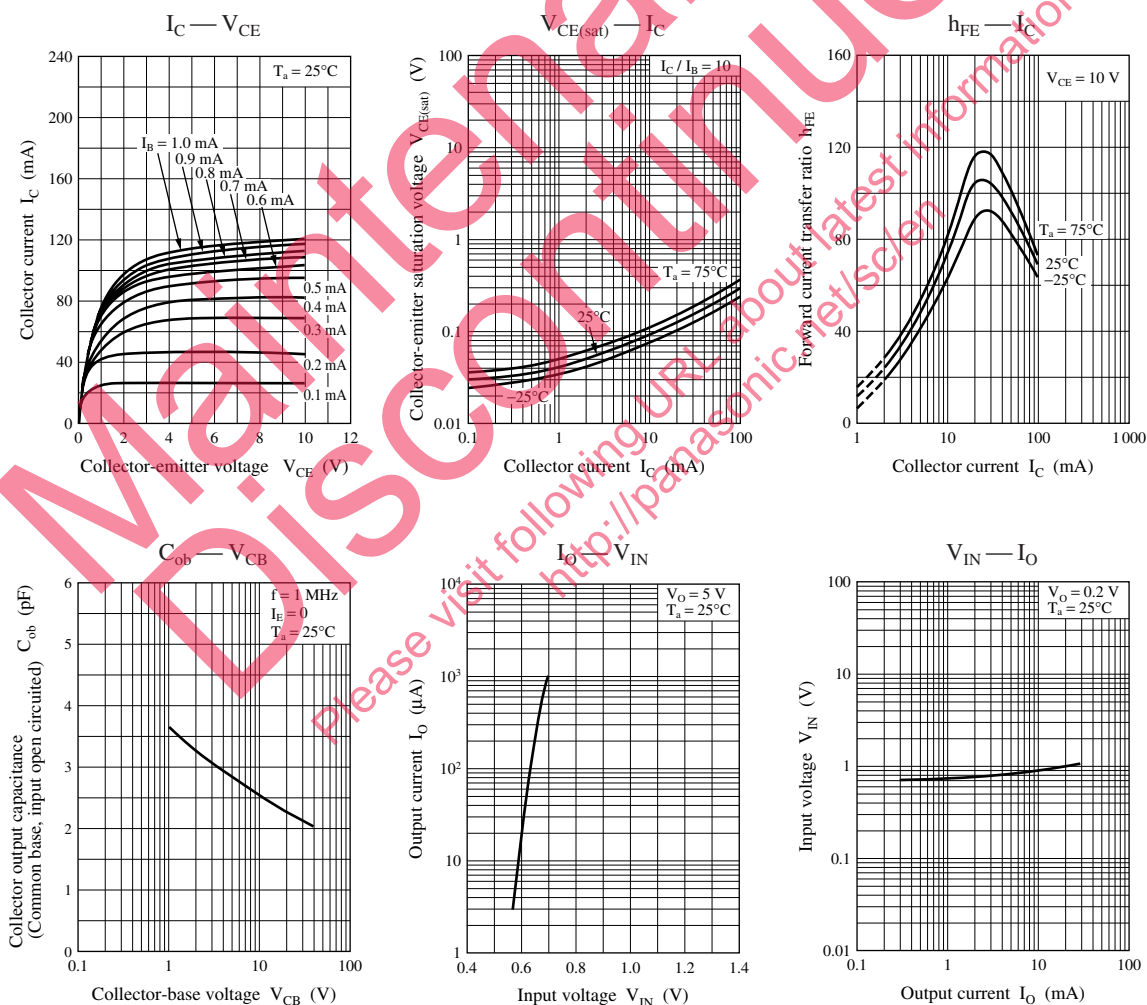


Characteristics charts of UNR121D

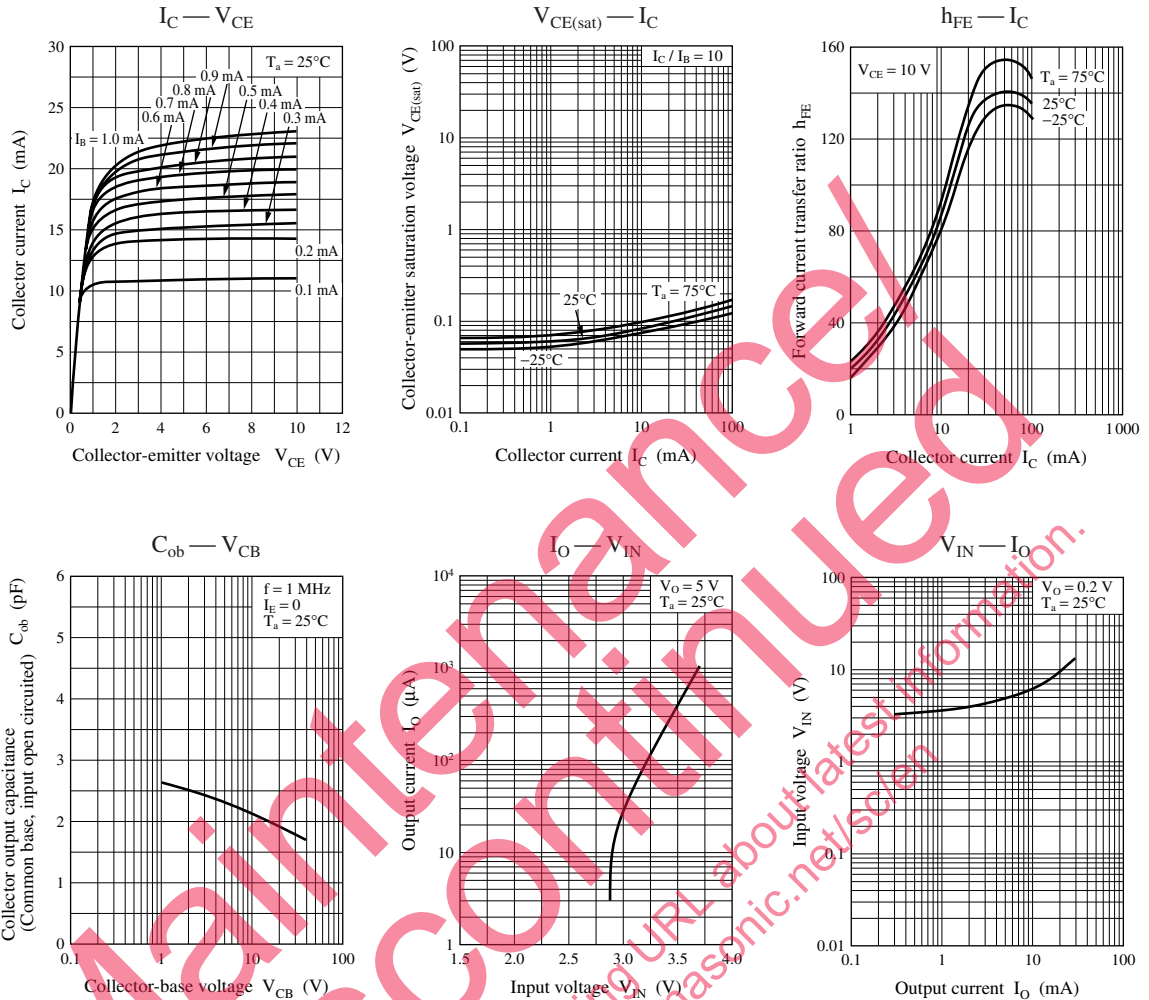


Characteristics charts of UNR121E

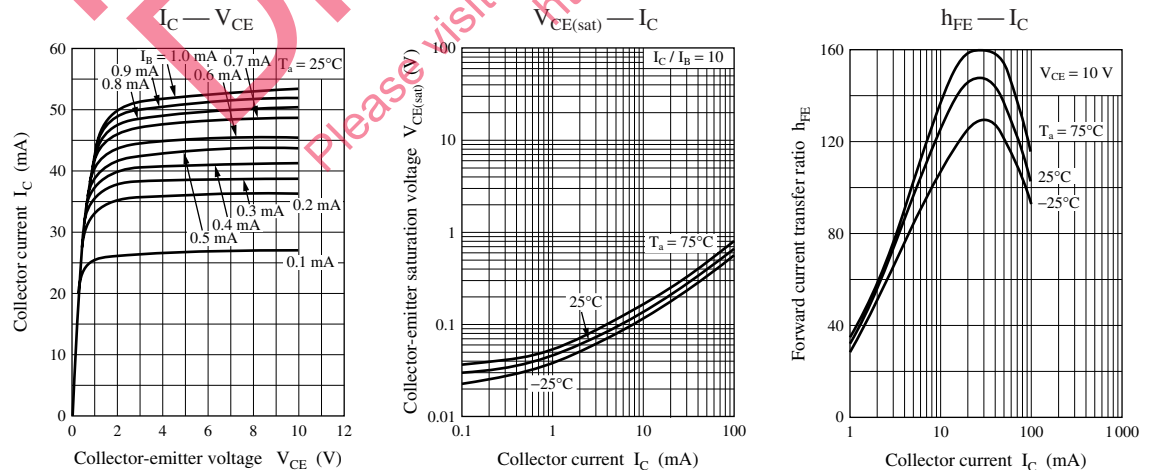


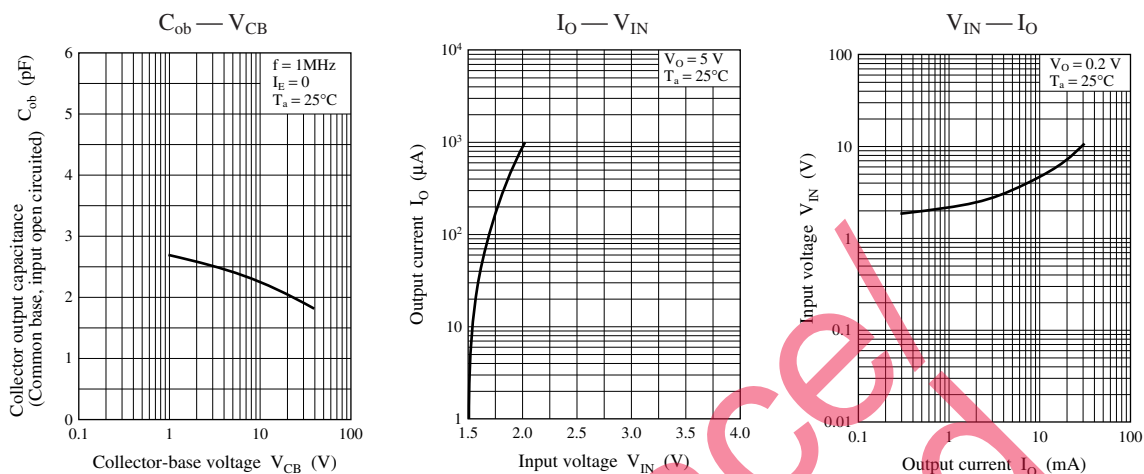


Characteristics charts of UNR121F


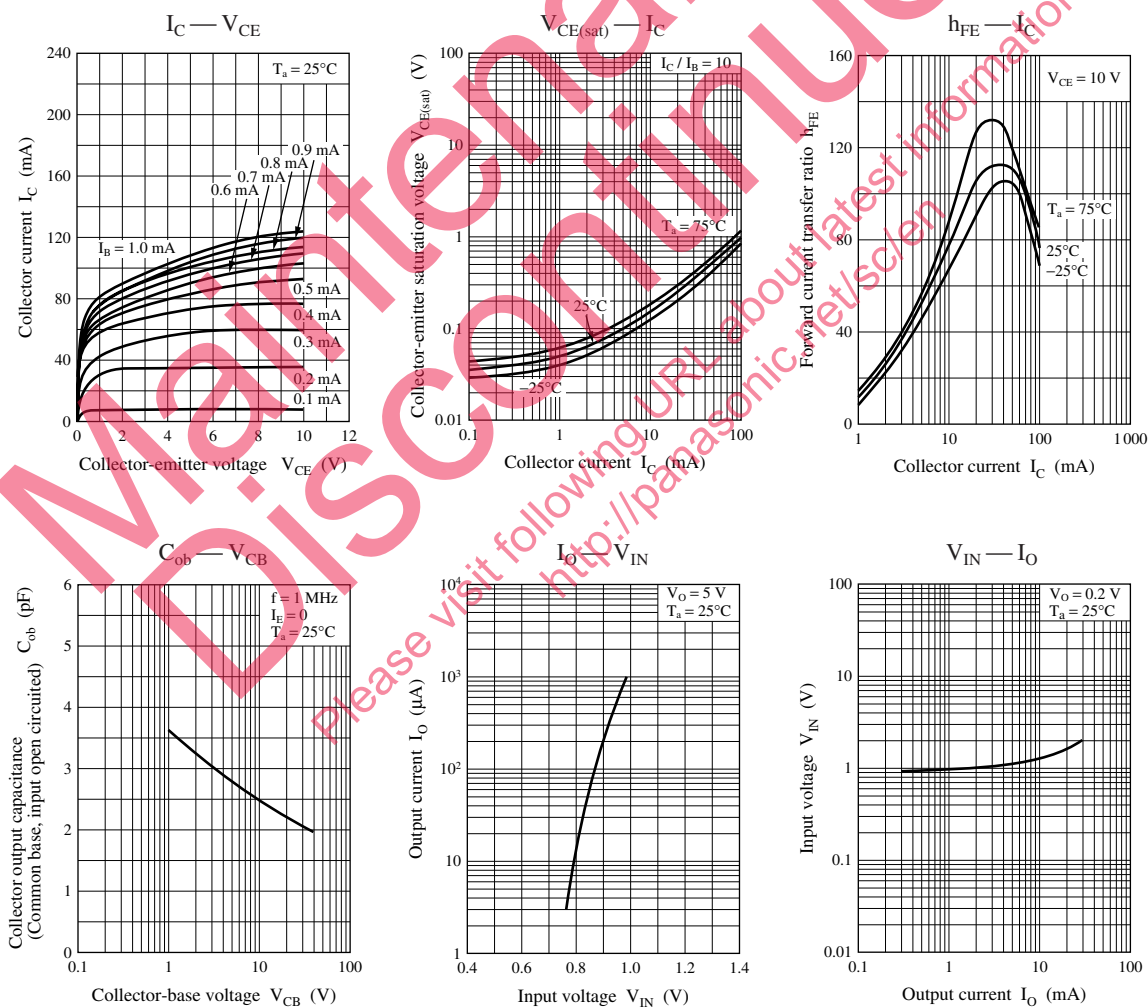


Characteristics charts of UNR121K

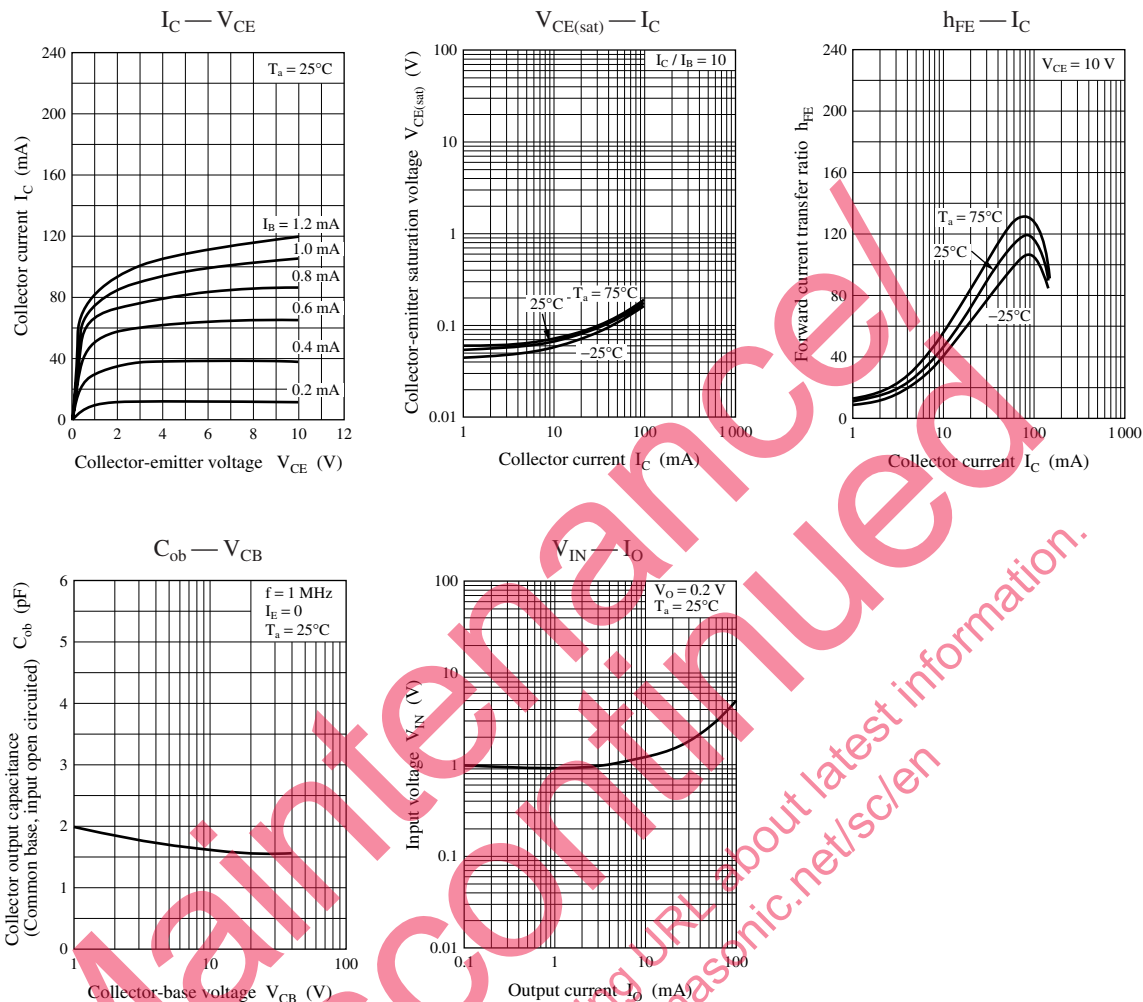

Characteristics charts of UNR121L

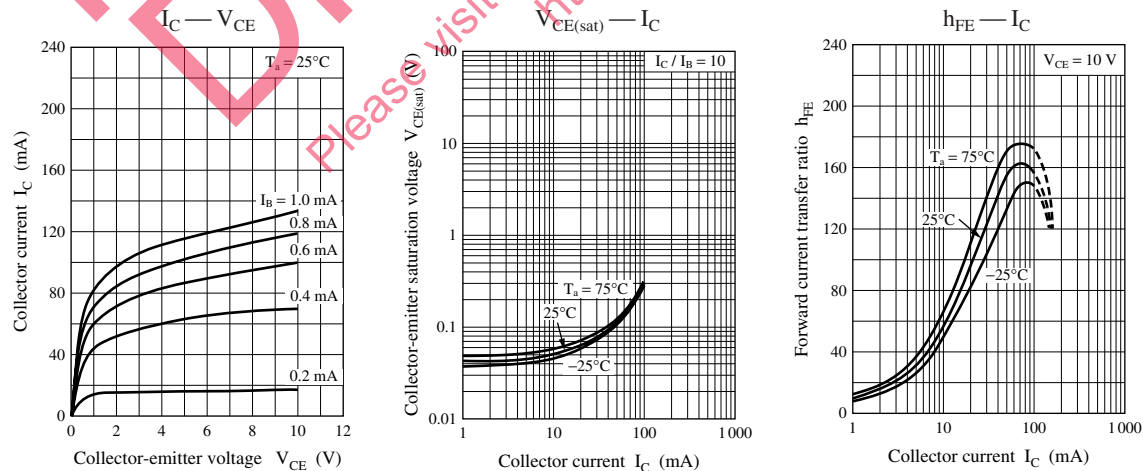

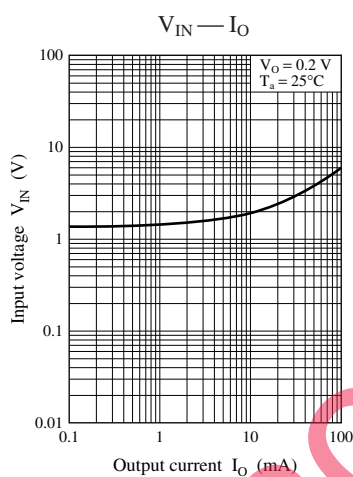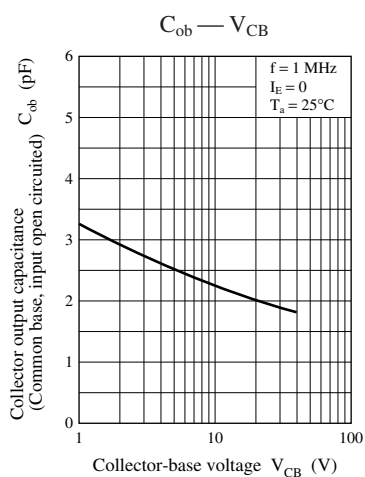

Maintenance/Discontinued

Please visit following URL about latest information.
<http://panasonic.net/sc/en>

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - ☐ Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.

Maintained & Discontinued
Please visit following URL about latest information:
<http://panasonic.net/sc/en>