


# MTD2001

## FEATURES

- Constant-current chopping function  
(Off time fixed, self-oscillation)
- 4-phase input  
(with inhibit for simultaneously turn ON)
- An ENABLE function is provided
- Protection for penetration current
- Built-in overheating protection  
(Alarm + shutdown)

## OUTLINE DIMENSIONS

Case : ZIP-27

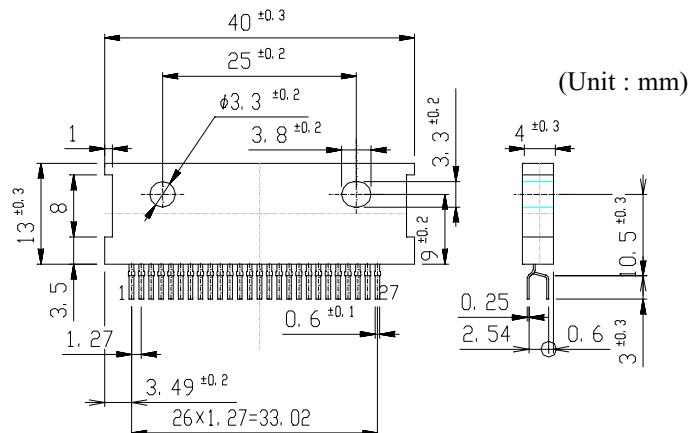

## RATINGS

### ● Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Ratings	Unit
Output Voltage	V <sub>CEO(SUS)</sub>	60	V
Output Current	I <sub>O</sub>	1.5	A
Logic Supply Voltage	V <sub>CC</sub>	0 to 7	V
Logic Input Voltage	V <sub>IN</sub>	0 to V <sub>CC</sub>	V
Total Power Dissipation	P <sub>T</sub>	5	W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-40 to 150	°C

### ● Electrical Characteristics (Ta=25°C)

Item	Symbol	Test Conditions	min.	typ.	max.	Unit
Output Saturation Voltage(Upper side)	V <sub>CE(sat)H</sub>	Io=1.0A		1.0	1.4	V
Output Saturation Voltage(Lower side)	V <sub>CE(sat)L</sub>	Io=1.0A		1.0	1.3	V
Output Leakage Current(Upper side)	I <sub>rH</sub>	V <sub>mm</sub> =60V, V <sub>out</sub> =0V			10	μA
Output Leakage Current(Lower side)	I <sub>rL</sub>	V <sub>out</sub> =60V, V <sub>RS</sub> =0V			10	μA
Logic Supply Current(Standby)	I <sub>CC(OFF)</sub>	V <sub>CC</sub> =5V, V <sub>ENA</sub> ="H"		25	35	mA
Logic Supply Current(All Circuit ON)	I <sub>CC(ON)</sub>	V <sub>CC</sub> =5V, V <sub>ENA</sub> ="L"		55	75	mA
Input High Voltage	V <sub>INH</sub>	V <sub>CC</sub> = 5V	2.7		V <sub>cc</sub>	V
	V <sub>ENAH</sub>	V <sub>CC</sub> = 5V	2.7		V <sub>cc</sub>	
Input Low Voltage	V <sub>INL</sub>	V <sub>CC</sub> = 5V	GND		1.0	V
	V <sub>ENAL</sub>	V <sub>CC</sub> = 5V	GND		1.0	
Logic High Input Current	I <sub>INH</sub>	V <sub>CC</sub> = 5V, V <sub>IN</sub> =5V			10	μA
	I <sub>ENAH</sub>	V <sub>CC</sub> = 5V, V <sub>ENA</sub> =5V			10	
Logic Low Input Current	I <sub>INL</sub>	V <sub>CC</sub> = 5V, V <sub>IN</sub> =0V		-10	-50	μA
	I <sub>ENAL</sub>	V <sub>CC</sub> = 5V, V <sub>ENA</sub> =0V		-10	-50	
Reference Input Current	I <sub>ref</sub>	V <sub>CC</sub> =5V, V <sub>ref</sub> =0V		-1	-10	μA
Input Current(Current Sensor)	I <sub>sense</sub>	V <sub>CC</sub> =5V, V <sub>S</sub> =0V		-1	-10	μA
Maximum Sensing Voltage	V <sub>S(max.)</sub>	V <sub>CC</sub> =5V			1.5	V
Thermal Alarm Cutoff Current	I <sub>ralm</sub>	V <sub>CC</sub> =5V, V <sub>alm</sub> =5V			10	μA
Thermal Alarm Output Current	I <sub>alm</sub>	V <sub>CC</sub> =5V, V <sub>alm</sub> =0.5V			2	mA
Thermal Alarm Temperature	T <sub>alm</sub>				125	°C
Thermal Shutdown Temperature	T <sub>TSD</sub>				150	°C

## ●Setting of Output Current and Fixed Off Time

Fig.1 shows constant current chopping wave form.

Output Current setting

$$I_o = \frac{R_2}{R_1+R_2} \cdot \frac{V_{cc}}{R_s}$$

Fixed Off Time Setting

$$T_{off} = 0.69 \cdot C_t \cdot R_t$$

## ●True Table

ENA A or B	IN 1 or 4	IN 2 or 3	Out 1 or 4	Out 2 or 3
L	L	L	OFF	OFF
L	L	H	L	H
L	H	L	H	L
L	H	H	OFF	OFF
H	×	×	OFF	OFF

× : don't care


## ●Recommended Parts Value

Symbol	Recommended Value	Unit
R <sub>s</sub>	0.68	Ω
R <sub>F</sub>	2	kΩ
C <sub>F</sub>	1000	pF
R <sub>t</sub>	15	kΩ
C <sub>t</sub>	3300	pF
R <sub>1+R<sub>2</sub></sub>	<10	kΩ

## ●Recommended Operating Conditions (Ta=25°C)

Item	Symbol	min.	typ.	max.	Unit
Motor Supply Voltage	V <sub>mm</sub>	10		50	V
Output Current	I <sub>o</sub>			1.2	A
Output Emitter Voltage	V <sub>E</sub>			1.5	V
Logic Supply Voltage	V <sub>CC</sub>	4.75		5.25	V
Chopping Frequency	f <sub>chop</sub>		20	27	kHz
Operating Temperature	T <sub>op</sub>	-25		120	°C

## Equivalent Circuit / Basic Application Circuit

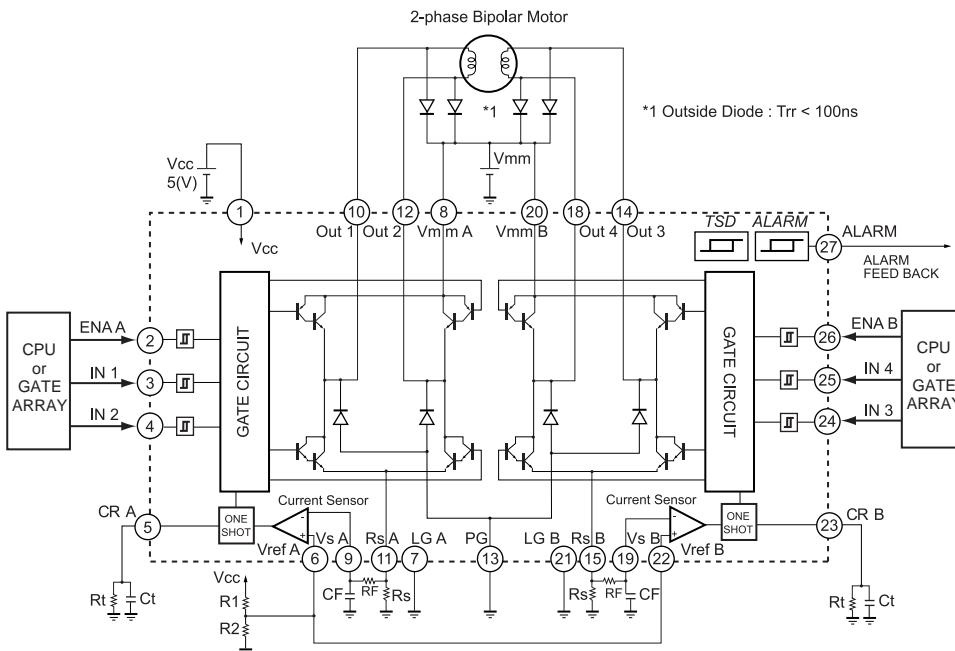

## Pin Assignment

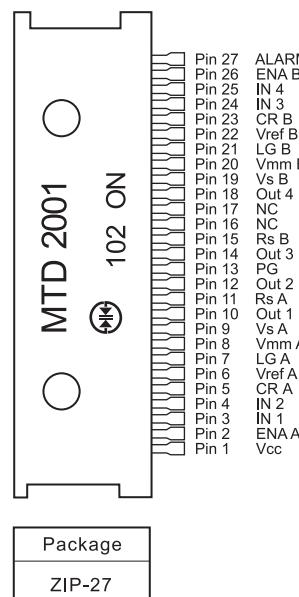


Fig.1 Constant current wave form (Motor current)

