
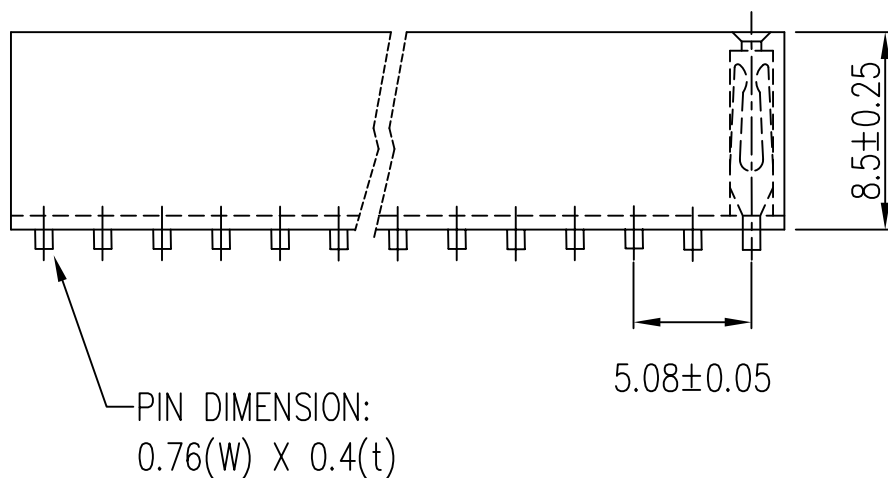


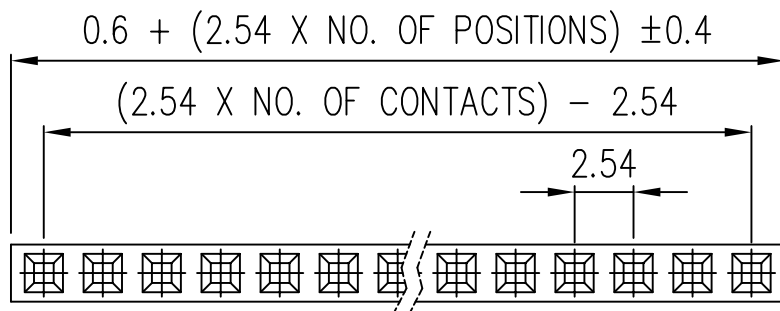

SPECIFICATIONS

CURRENT RATING : 3 AMPS

INSULATOR RESISTANCE : 5000 MEGOHMS MIN.

CONTACT RESISTANCE : 20 MILLIOHMS MAX.



DIELECTRIC WITHSTANDING : AC 500V

OPERATING TEMPERATURE : $-40^{\circ}\text{C} - +125^{\circ}\text{C}$

CONTACT MATERIAL : PHOSPHOR BRONZE

INSULATOR MATERIAL : POLYESTER PBT, UL 94V-0

*CONTACT PLATING: P= OVERALL GOLD FLASH, T=OVERALL TIN

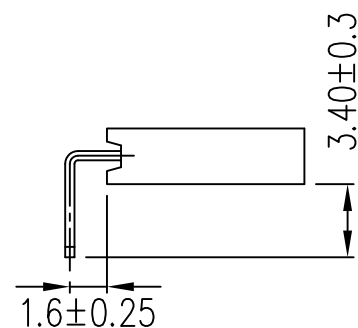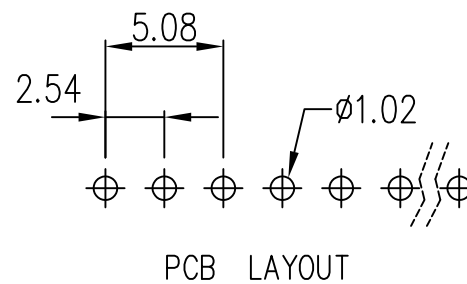

ORDERING INFORMATION:

Replace "*" with plating code

Replace "xx" with number of contacts

REV.	ECN NO.	DATE
A	RELEASED	09/02/03
B	UPDATE TOL	12/15/04

SCALE	NTS	DRAW	BC	Sullins Electronics San Marcos, CA Tel: 760 744-0125 www.SullinsElectronics.com	
UNIT	MM	CHECK			
TOLERANCE		AP"E		NAME: FEMALE HEADER, 2.54MM SPACING, 8.5mm PROFILE, RIGHT ANGLE	
$.0 \pm 0.35$ $.00 \pm 0.2$ ANG $\pm 5^{\circ}$		PROJECTION		PART NO	PP*Cxx1LGBN
				DRAW NO	7009