

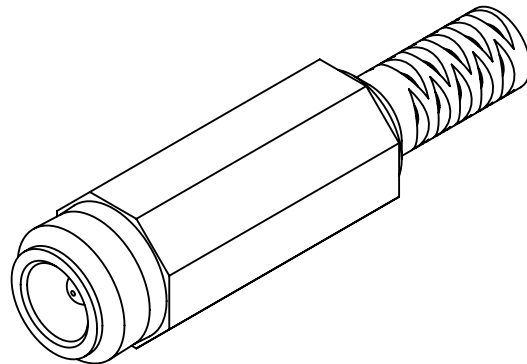
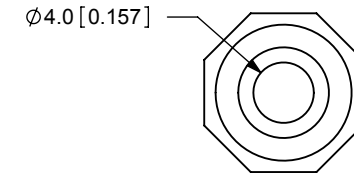


REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/11/2005
B	Updated rating	3/6/2007

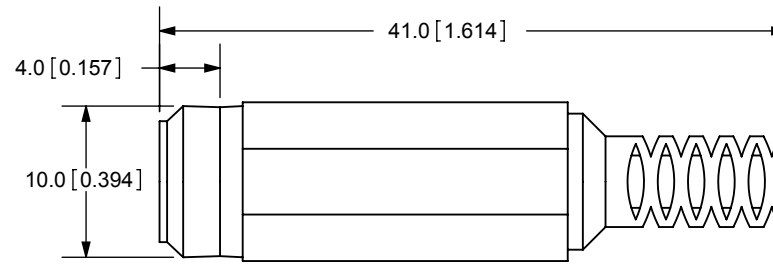

TOLERANCE:
±0.3mm

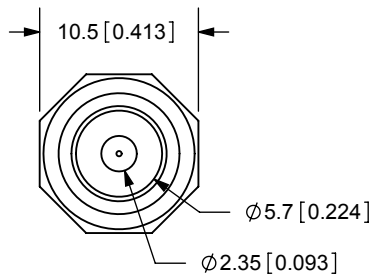

SPECIFICATIONS:
RATING: 24V DC @ 4A
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

MODEL NO.	PR-002B
SCHEMATIC	

CENTER PIN DIAMETER 2.35mm Dia.

	MATERIAL	PLATING
CONTACT PIN	PBS	Nickel
CAP	PE	
TERMINAL 1	BSR	Nickel
TERMINAL 2	BSR	Nickel
PIN	BSBM	Nickel
RING	BSBM	Nickel
BODY	PA	



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: DC POWER PLUGS		REV: B
PART NO. PR-002B		UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:	SCALE: 2:1

PC FILE NAME:
PR-002B

COPYRIGHT 2007 BY CUI INC.