


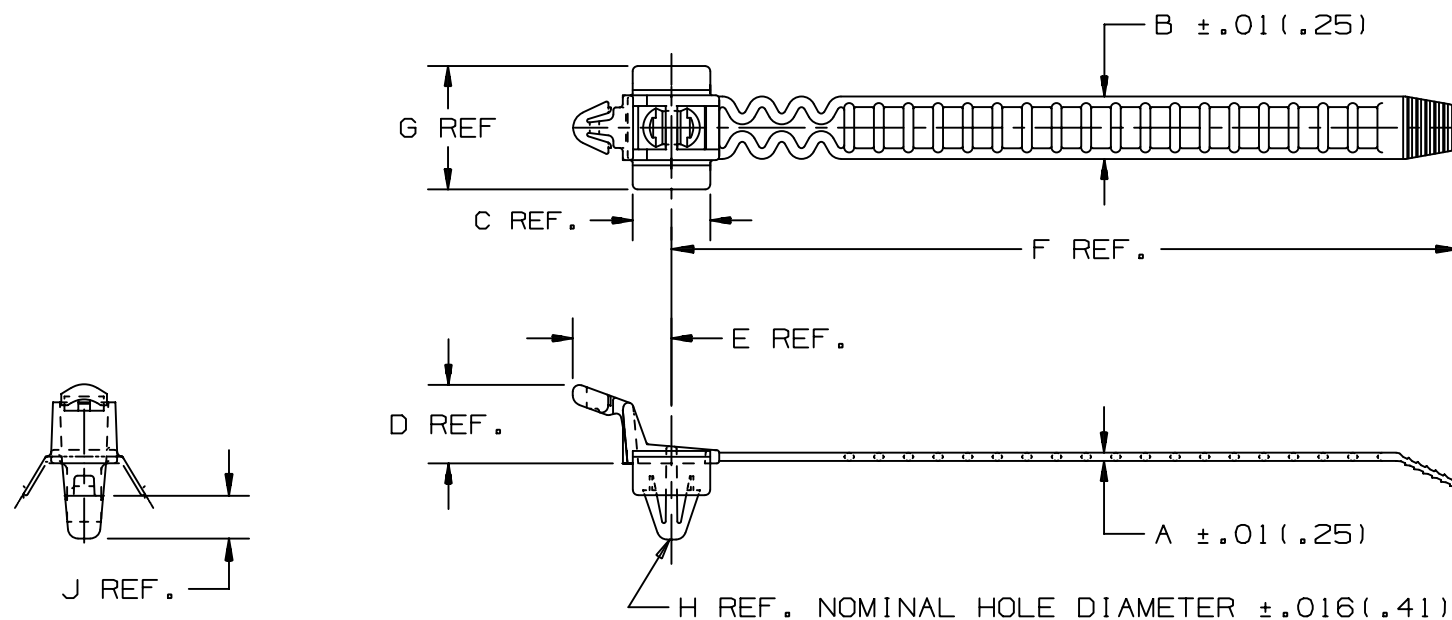

PANDUIT PART NO.	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	MAX. PANEL THICKNESS in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT 100 pcs lbs (g)
	MIN. in (mm)	MAX. in (mm)													
PRLWP30S-30	.312 (7.9)	1.43 (36)	.05 (1.3)	.38 (9.7)	.47 (11.9)	.47 (11.9)	.65 (16.5)	4.7 (119)	.71 (18)	.266 (6.8)	.30 (7.6)	.118 (3.0)	35 (156)	STANDARD	.36 (163)
PRLWP50S-30	.312 (7.9)	2.18 (55)	.05 (1.3)	.38 (9.7)	.47 (11.9)	.47 (11.9)	.65 (16.5)	7.1 (180)	.71 (18)	.266 (6.8)	.30 (7.6)	.118 (3.0)	35 (156)	STANDARD	.44 (200)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

PANDUIT CORP. TINLEY PARK, ILLINOIS

WINGED PUSH MOUNT CABLE TIE

PRLWP SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .1 (.25) (.XXX) ± .020 (.51)
(.XX) ± .02 (.5) ANGLES ----

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
WKS/RLS

MAT'L:

SCALE

NONE

DATE
10/3/88

HEAT STABILIZED
NYLON 6.6
BLACK (-30)

DRAWING NO.

SS-23343

DWG
SIZE
A

14 12/16/04 JABO

CHANGED METRIC CONVERSION FROM WHOLE
NUMBER TO ONE DIGIT ON DIM. C & D

23343 14

REV DATE BY CHK DESCRIPTION

ECN - R

CUST

SUP

CHK'D
HVP