



SAW Components

Data Sheet B3607

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured with some light streaks and gradients.

EPCOS



SAW Components

B3607

Low-Loss Filter

140,00 MHz

Data Sheet


Ceramic package QCC12

Features

- High performance IF bandpass filter
- Constant group delay
- Hermetically sealed ceramic package

Terminals


- Gold plated

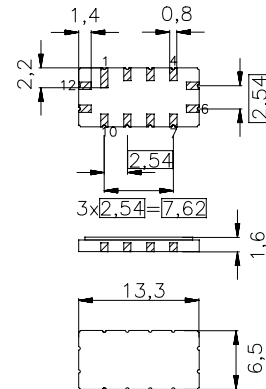

Dimensions in mm, approx. weight 0,4 g

Pin configuration

11	Input
1	Input - ground
5	Output
7	Output - ground
2, 6, 8, 12	Case - ground
3, 9	Shield - ground
4, 10	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B3607	B39141-B3607-Z510	C61157-A7-A55	F61074-V8163-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	source impedance 50 Ω
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	



SAW Components	B3607
Low-Loss Filter	140,00 MHz

Data Sheet


Characteristics

Operating temperature:	$T = 25\text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\text{ }\Omega$ and matching circuit
Terminating load impedance:	$Z_L = 50\text{ }\Omega$ and matching circuit
Group delay aperture	200 kHz



		min.	typ.	max.	
Center frequency (Center between 6dB points)	f_C	139,75	140,00	140,25	MHz
Insertion attenuation at f_C	α_C	—	6,0	7,5	dB
Amplitude ripple (p-p) 137,50 ... 142,50 MHz	$\Delta\alpha$	—	0,7	1,0	dB
Phase ripple (p-p) 137,50 ... 142,50 MHz	$\Delta\phi$	—	5	10	$^{\circ}$
Pass bandwidth					
$\alpha_{rel} \leq 1\text{ dB}$	B_{1dB}	5,8	6,1	—	MHz
$\alpha_{rel} \leq 3\text{ dB}$	B_{3dB}	6,9	7,1	—	MHz
$\alpha_{rel} \leq 40\text{ dB}$	B_{40dB}	—	10,5	11,1	MHz
Relative attenuation (relative to α_C)	α_{rel}				
100,00 ... 134,00 MHz		40	47	—	dB
146,00 ... 180,00 MHz		40	46	—	dB
Group delay at f_C	τ_C	—	1,35	—	μs
Group delay ripple (p-p) 137,50 ... 142,50 MHz	$\Delta\tau$	—	80	150	ns
Temperature coefficient of frequency	TC_f	—	-87	—	ppm/K

Matching circuit:

Note: Component values depend upon PCB layout

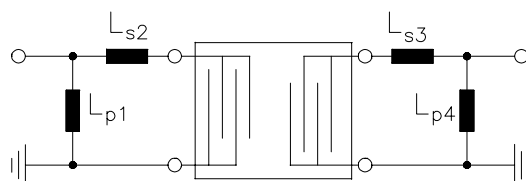

$L_{P1} = 47\text{ nH}$
 $L_{S2} = 27\text{ nH}$
 $L_{S3} = 39\text{ nH}$
 $L_{P4} = 68\text{ nH}$

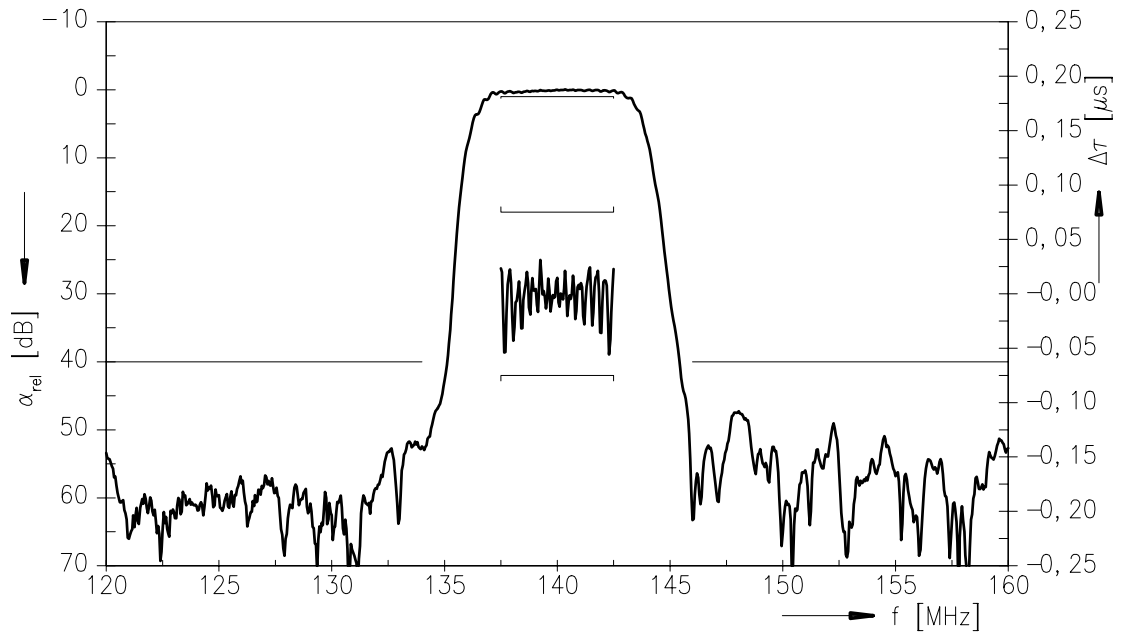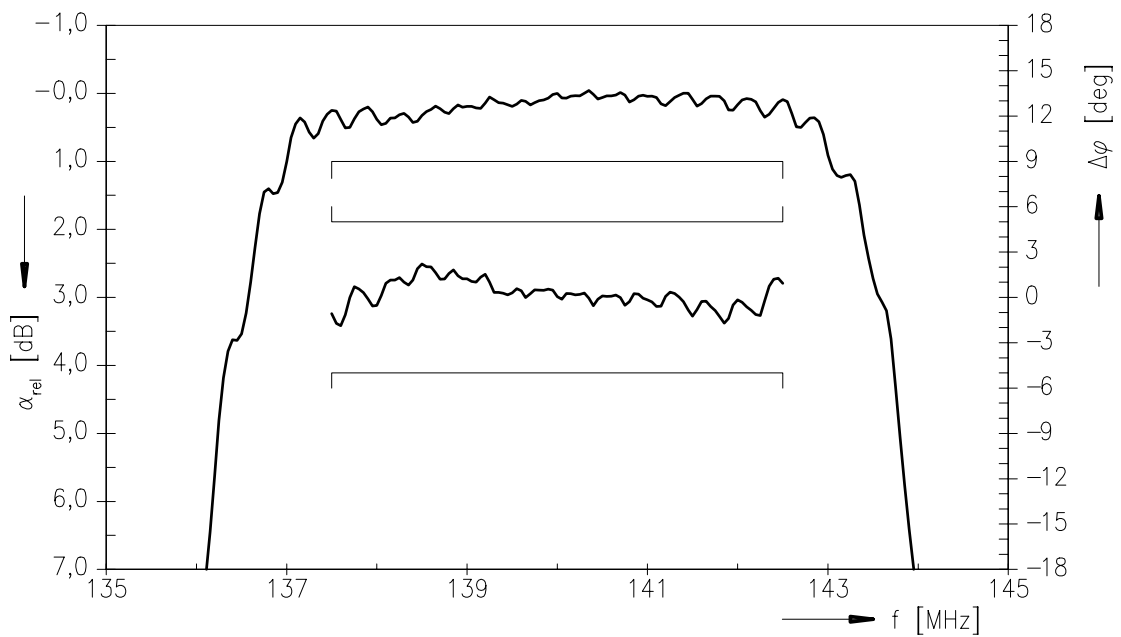**SAW Components****B3607****Low-Loss Filter****140,00 MHz****Data Sheet****Normalized frequency response****Normalized frequency response**



SAW Components	B3607
Low-Loss Filter	140,00 MHz

Data Sheet

Attachment

1) Pyroelectric pulse amplitude < 50 mV.



SAW Components	B3607
Low-Loss Filter	140,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.