THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

2005, Projecta Unlimited Inc.


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
DIRECTIVITY	UNI	ı
SENSITIVITY	-50±4	dB
STANDARD OPERATING VOLTAGE	2	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mΑ
IMPEDANCE	2.2	K0hm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	SOLDER PADS	-
INTERNAL CAPACITOR	N/A	pF
-		

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	1/31/06	
Α	ADDED TERMINAL POLARITY	2/5/07	D.F.

projects © unlimited

Dayton , Ohio

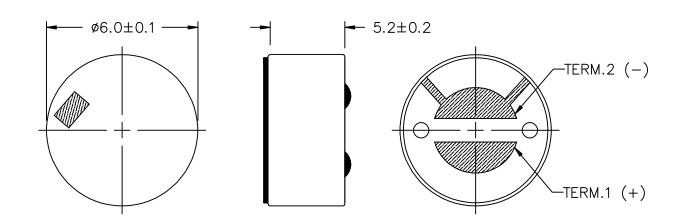

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

MICROPHONE DATE APPROVALS J.A.F. 01/06 DRAWING NO.
PUM-5250L-R CHECKED 01/06 E.P. FILE NAME B.R. 01/06 PUM-5250L-R.DWG SHEET 1 OF DO NOT SCALE DRAWING SCALE: N.T.S.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS,TOLERANCES ARE ±0.5 AND ANGLES ARE ±3".