



SAW Components

Data Sheet B7823

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns overlaid on it, all set against a dark, textured background.



SAW Components

B7823

Low-Loss Filter for Mobile Communication

1960,0 MHz

Preliminary Data





Chip sized SAW package QCS5C

Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to unbalanced operation
- Package for **Surface Mount Technology (SMT)**

Terminals


- Ni, gold-plated

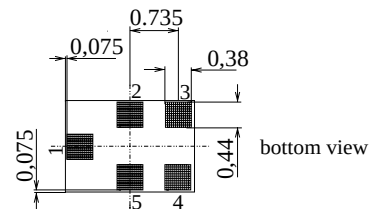

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- | | |
|-----|--------------------|
| 1 | Input, unbalanced |
| 4 | Output, unbalanced |
| 2,5 | Case ground |
| 3 | to be grounded |

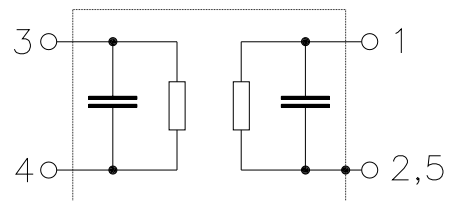

Type	Ordering code	Marking and Package according to	Packing according to
B7823	B39202-B7823-C710	C61157-A7-A111	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	°C	peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
Input Power at				
GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900	P_{IN}	12	dBm	
Tx bands				



SAW Components

B7823

Low-Loss Filter for Mobile Communication

1960,0 MHz

Preliminary Data



Characteristics

Operating Temperature Range:	$T = +25 \pm 2 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\Omega$ (unbalanced)
Terminating load impedance:	$Z_L = 50\Omega$ (unbalanced)

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,3	2,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	0,8	1,3	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,7	1,9	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Attenuation	α				
0,0 ... 1500,0 MHz		35	42	—	dB
1500,0 ... 1700,0 MHz		30	38	—	dB
1700,0 ... 1850,0 MHz		25	30	—	dB
1850,0 ... 1890,0 MHz		22	25	—	dB
1890,0 ... 1910,0 MHz		13	16	—	dB
2010,0 ... 2070,0 MHz		13	16	—	dB
2070,0 ... 2090,0 MHz		20	24	—	dB
2090,0 ... 2200,0 MHz		25	28	—	dB
2200,0 ... 2400,0 MHz		25	32	—	dB
2400,0 ... 2500,0 MHz		30	35	—	dB
2500,0 ... 3600,0 MHz		30	35	—	dB
3600,0 ... 4000,0 MHz		30	38	—	dB
4000,0 ... 6000,0 MHz		25	35	—	dB



SAW Components

B7823

Low-Loss Filter for Mobile Communication

1960,0 MHz

Preliminary Data



Characteristics

Operating Temperature Range: $T = -10$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 50\Omega$ (unbalanced)

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,3	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	0,8	1,5	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,7	1,9	
Output VSWR					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
Attenuation	α				
0,0 ... 1500,0 MHz		35	42	—	dB
1500,0 ... 1700,0 MHz		30	38	—	dB
1700,0 ... 1850,0 MHz		25	30	—	dB
1850,0 ... 1890,0 MHz		20	24	—	dB
1890,0 ... 1910,0 MHz		9	13	—	dB
2010,0 ... 2070,0 MHz		9	13	—	dB
2070,0 ... 2090,0 MHz		18	23	—	dB
2090,0 ... 2200,0 MHz		25	28	—	dB
2200,0 ... 2400,0 MHz		25	32	—	dB
2400,0 ... 2500,0 MHz		30	35	—	dB
2500,0 ... 3600,0 MHz		30	35	—	dB
3600,0 ... 4000,0 MHz		30	38	—	dB
4000,0 ... 6000,0 MHz		25	35	—	dB



SAW Components

B7823

Low-Loss Filter for Mobile Communication

1960,0 MHz

Preliminary Data



Characteristics

Operating Temperature Range: $T = -30$ to $+85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\Omega$ (unbalanced)
Terminating load impedance: $Z_L = 50\Omega$ (unbalanced)

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
1930,0 ... 1990,0 MHz		—	2,6	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	1,1	1,8	dB
Input VSWR					
1930,0 ... 1990,0 MHz		—	1,9	2,1	
Output VSWR					
1930,0 ... 1990,0 MHz		—	2,0	2,2	
Attenuation	α				
0,0 ... 1500,0 MHz		35	42	—	dB
1500,0 ... 1700,0 MHz		30	38	—	dB
1700,0 ... 1850,0 MHz		25	30	—	dB
1850,0 ... 1890,0 MHz		20	24	—	dB
1890,0 ... 1910,0 MHz		8	12	—	dB
2010,0 ... 2070,0 MHz		6*	10*	—	dB
2070,0 ... 2090,0 MHz		18	23	—	dB
2090,0 ... 2200,0 MHz		25	28	—	dB
2200,0 ... 2400,0 MHz		25	32	—	dB
2400,0 ... 2500,0 MHz		30	35	—	dB
2500,0 ... 3600,0 MHz		30	35	—	dB
3600,0 ... 4000,0 MHz		30	38	—	dB
4000,0 ... 6000,0 MHz		25	35	—	dB

* 7dB (min.) (11dB typ.) for $T = -20$ to $+85^{\circ}\text{C}$



SAW Components

B7823


Low-Loss Filter for Mobile Communication

1960,0 MHz


Preliminary Data



Transfer function (spec for 25°C)

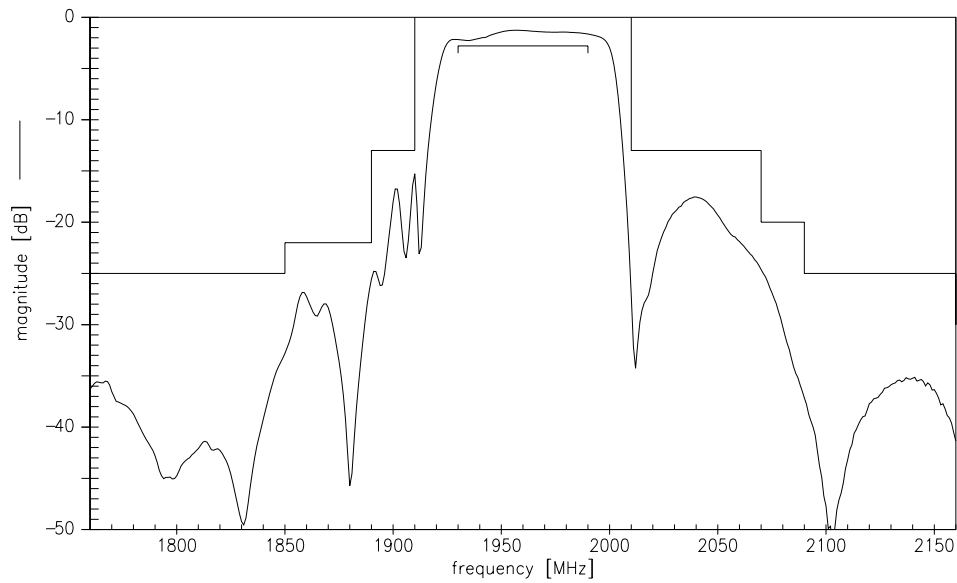

Transfer function (wideband)

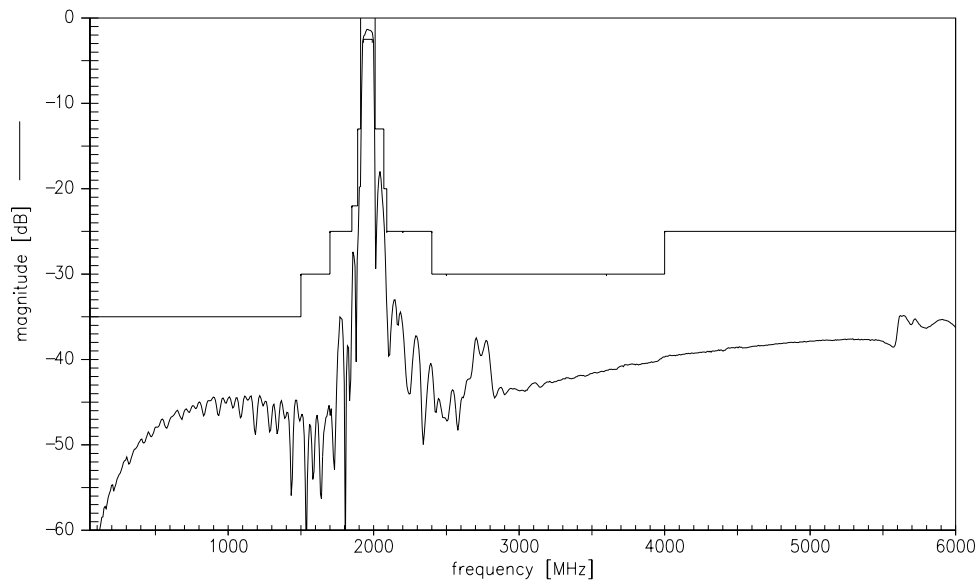



SAW Components	B7823
Low-Loss Filter for Mobile Communication	1960,0 MHz
Preliminary Data	

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2002. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.