



SAW Components

Data Sheet B3646

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured, with some light streaks and a sense of motion or depth.

EPCOS



SAW Components

B3646

Low-Loss Filter

208,0 MHz

Data Sheet


Ceramic package **QCC10B**

Features

- Low-loss wideband IF filter
- No matching required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)

Terminals


- Gold-plated

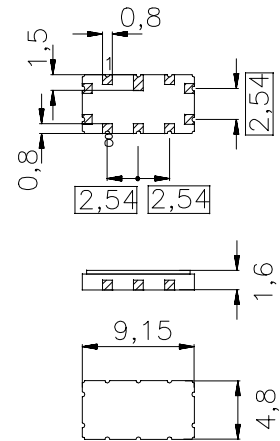

Dimensions in mm, approx. weight 0,2 g

Pin configuration

10	Input
9	Input ground
5	Output
4	Output ground
2, 7	Ground
1, 3, 6, 8	Case – ground

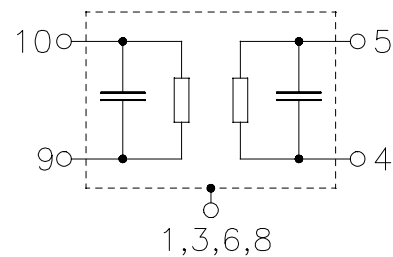

Type	Ordering code	Marking and Package according to	Packing according to
B3646	B39211-B3646-Z710	C61157-A7-A49	F61074-V8172-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 25/+ 85	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	- 40/+ 125	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_{s}	10	dBm	



SAW Components	B3646
Low-Loss Filter	208,0 MHz

Data Sheet

Characteristics

Operating temperature:	$T_A = -10 \dots +85 \text{ }^\circ\text{C}$
Terminating source impedance:	$Z_S = 50 \text{ } \Omega$
Terminating load impedance:	$Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	208,0	—	MHz
Maximum insertion attenuation	$f_N \pm 400 \text{ kHz}$ $\alpha_{\max}$	1,5	2,0	3,5	dB
Passband width	$\alpha_{\text{rel}} \leq 1,0 \text{ dB}$ $B_{1,0\text{dB}}$	—	5,08	—	MHz
Amplitude ripple (p-p)	$f_N \pm 100 \text{ kHz}$ $\Delta\alpha$	—	0,03	0,2	dB
Amplitude ripple (p-p)	$f_N \pm 400 \text{ kHz}$ $\Delta\alpha$	—	0,1	1,0	dB
Absolute group delay (at f_N)	τ	—	120	300	ns
Group delay ripple (p-p)	$f_N \pm 400 \text{ kHz}$ $\Delta\tau$	—	8	30	ns
Relative attenuation (relative to $\alpha_{\max}$)	α_{rel}				
10,0 MHz ... $f_N - 33,0 \text{ MHz}$		38,0	50,0	—	dB
$f_N - 33,0 \text{ MHz}$... $f_N - 23,0 \text{ MHz}$		44,0	50,0	—	dB
$f_N - 23,0 \text{ MHz}$... $f_N - 14,0 \text{ MHz}$		30,0	40,0	—	dB
$f_N - 14,0 \text{ MHz}$... $f_N - 0,4 \text{ MHz}$		0,0	2,0	—	dB
$f_N + 0,4 \text{ MHz}$... $f_N + 14,0 \text{ MHz}$		0,0	2,0	—	dB
$f_N + 14,0 \text{ MHz}$... $f_N + 28,0 \text{ MHz}$		5,0	35,0	—	dB
$f_N + 28,0 \text{ MHz}$... 450,0 MHz		12,0	45,0	—	dB
Input IP3 (Third order intercept point)¹⁾		45,0	—	—	dBm
VSWR	$f_N \pm 400 \text{ kHz}$	—	1,5:1	2,0:1	
Temperature coefficient of frequency	TC_f	—	-70	—	ppm/K

1) With two 10 dbm fundamental signals at 180 MHz and 208 MHz applied the third order intermodulation product at the output at 236 MHz will have less than -64 dBm.



SAW Components


B3646

Low-Loss Filter


208,0 MHz

Data Sheet

Transfer function

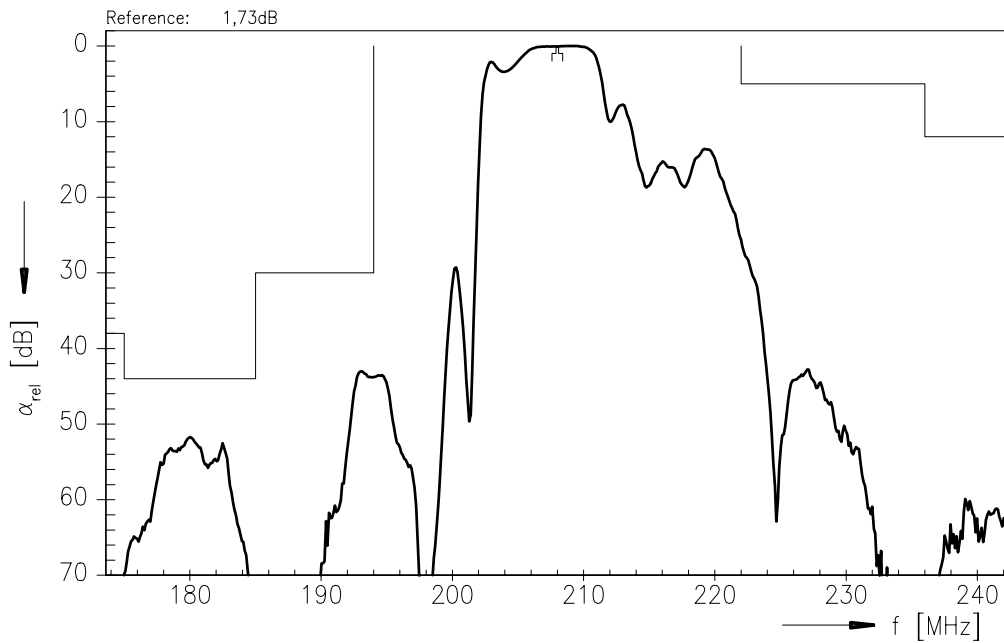

Transfer function (pass band)

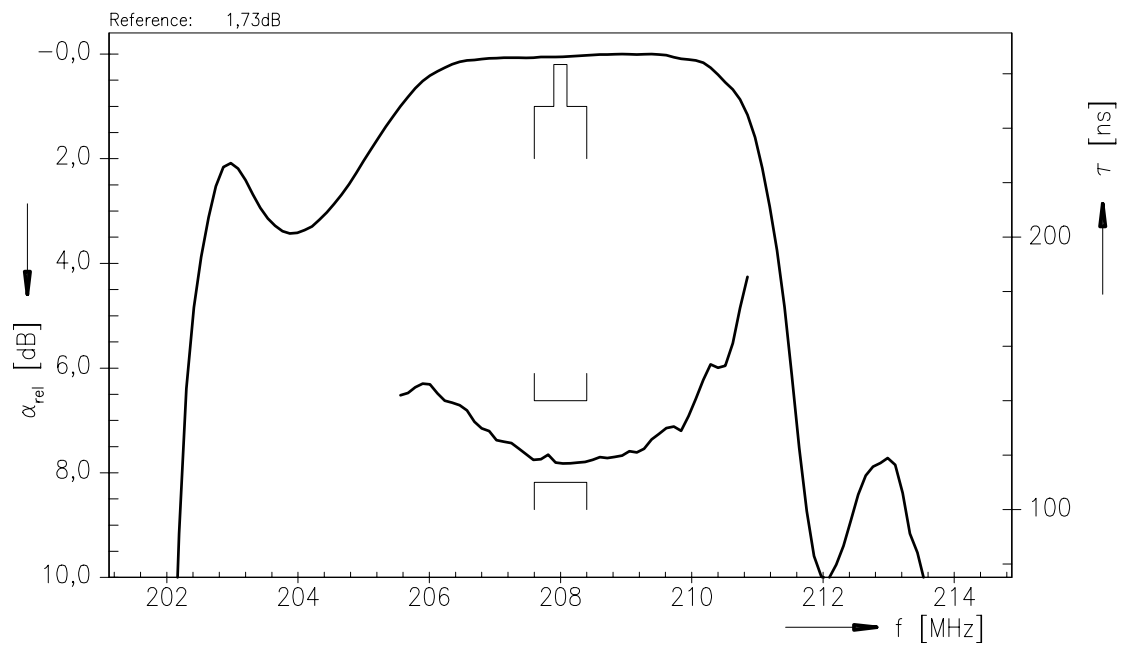



SAW Components	B3646
Low-Loss Filter	208,0 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.