



SAW Components

Data Sheet B3643

Data Sheet

An abstract, grayscale background graphic featuring a globe with a grid of latitude and longitude lines. Overlaid on the globe is a large, stylized, 3D-effect word "EPCOS" in a light gray color. The word is tilted and appears to be floating or emerging from the globe. The overall image has a soft, ethereal quality with some light flares and a dark, smoky background.

EPCOS



SAW Components

B3643

Low-Loss Filter

371,0 MHz

Data Sheet


Ceramic package QCC10B

Features

- IF low-loss filter for wireless LAN systems
- Channel selection according to IEEE 802.11
- Temperature stable
- Ceramic SMD package

Terminals


- Gold plated

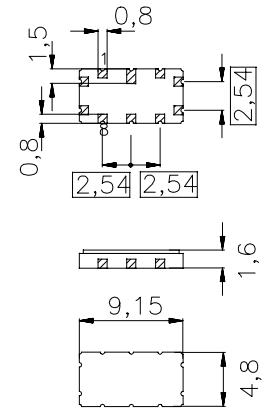

Dimensions in mm, approx. weight 0,23

Pin configuration

10	Input
5	Output
9	Input ground
4	Output ground
2, 7	Ground
1, 3, 6, 8	Case ground

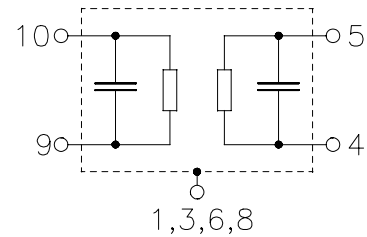

Type	Ordering code	Marking and Package according to	Packing according to
B3643	B39371-B3643-Z710	C61157-A7-A49	F61074-V8035-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-25 / +70	°C	
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	source impedance 50 Ω



SAW Components

B3643

Low-Loss Filter

371,0 MHz

Data Sheet

Characteristics

Operating temperature range:

$T_A = -20 \dots +60 \text{ }^\circ\text{C}$

Terminating source impedance:

$Z_S = 50 \text{ } \Omega$ and matching network


Terminating load impedance:

$Z_L = 50 \text{ } \Omega$ and matching network

		min.	typ.	max.	
Nominal frequency	f_N	—	371,0	—	MHz
Insertion attenuation at f_N	α_N	—	10	11,5	dB
Pass bandwidth					
$\alpha_{\text{rel}} < 1 \text{ dB}$	$B_{1\text{dB}}$	1,3	1,6	—	MHz
$\alpha_{\text{rel}} < 3 \text{ dB}$	$B_{3\text{dB}}$	—	2,0	2,5	MHz
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N - 0,5 \text{ MHz} \dots f_N + 0,5 \text{ MHz}$		—	0,3	1,0	dB
Amplitude slope in passband		—	0,0	$\pm 0,5$	dB
Group delay ripple (p-p)	$\Delta\tau$				
$f_N - 0,65 \text{ MHz} \dots f_N + 0,65 \text{ MHz}$		—	80	120	ns
$f_N - 1,00 \text{ MHz} \dots f_N + 1,00 \text{ MHz}$		—	90	—	ns
Relative attenuation (relative to α_N)	α_{rel}				
$f_N - 50 \text{ MHz} \dots f_N - 15 \text{ MHz}$		45	60	—	dB
$f_N - 15 \text{ MHz} \dots f_N - 5 \text{ MHz}$		40	55	—	dB
$f_N + 5 \text{ MHz} \dots f_N + 25 \text{ MHz}$		40	45	—	dB
$f_N + 25 \text{ MHz} \dots f_N + 50 \text{ MHz}$		45	50	—	dB
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,036	—	ppm/K ²
Turnover temperature	T_0	—	16	—	$^\circ\text{C}$

¹⁾ Temperature dependance of f_C : $f_C(T_A) = f_C(T_0)(1 + TC_f(T_A - T_0)^2)$

Matching network (Element values depend upon PCB layout)

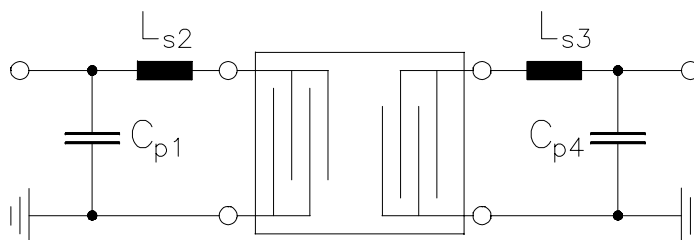

$C_{p1} = 15 \text{ pF}$
 $L_{s2} = 27 \text{ nH}$
 $L_{s3} = 22 \text{ nH}$
 $C_{p4} = 15 \text{ pF}$



SAW Components


B3643

Low-Loss Filter


371,0 MHz

Data Sheet

Transfer function

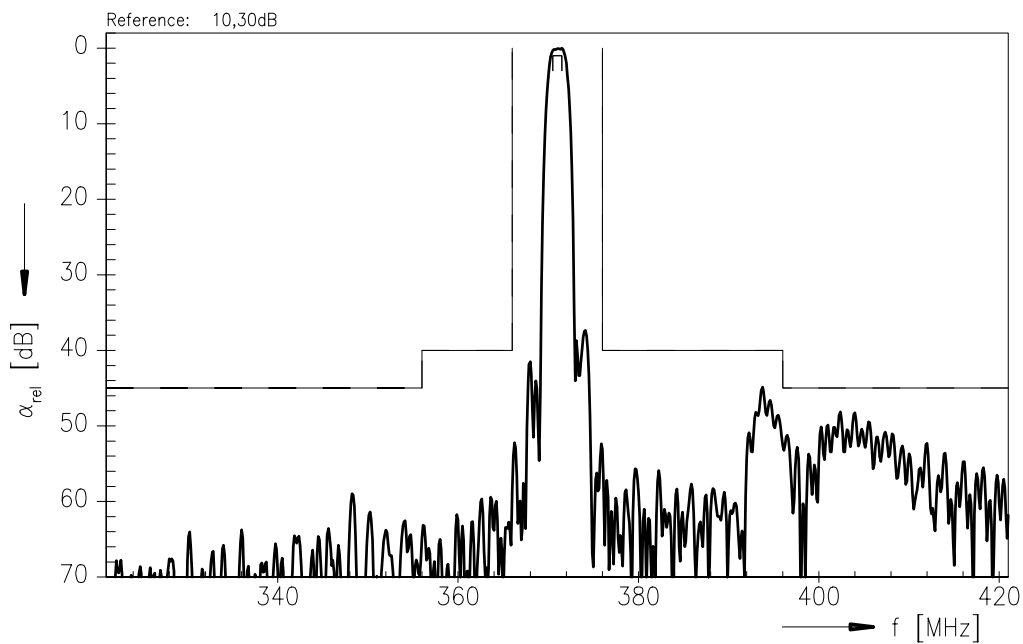

Transfer function (pass band)

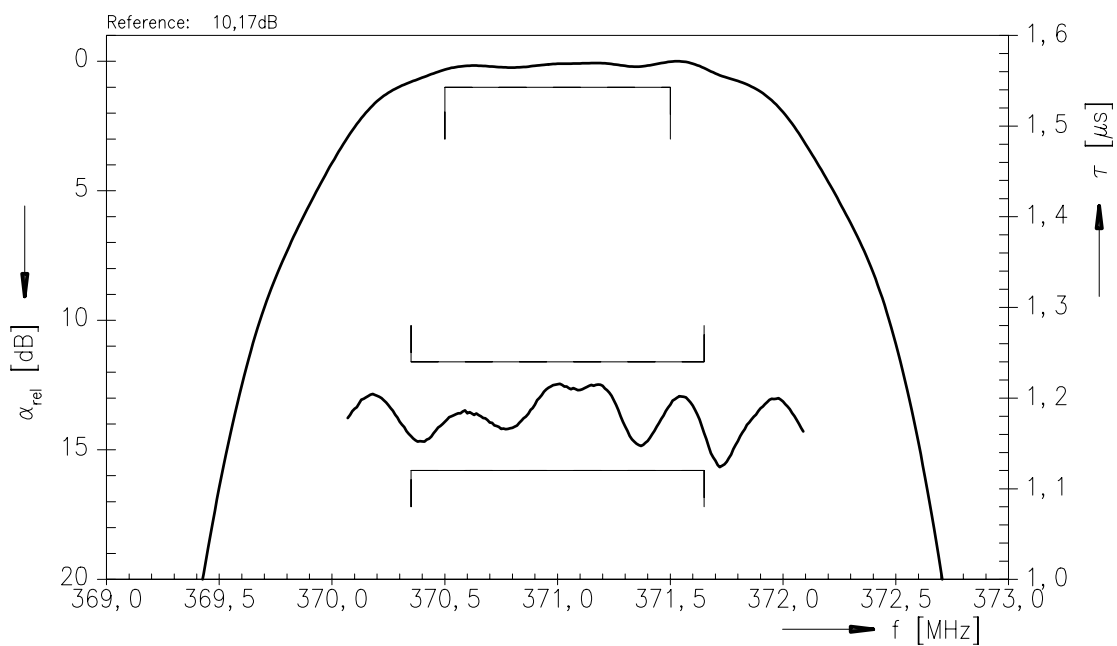



SAW Components	B3643
Low-Loss Filter	371,0 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC IS
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.