


THIS DOCUMENT CONTAINS DATA PROPRIETARY
TO PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN WHOLE OR IN PART, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC.
IS PROHIBITED.

©2003, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	4	W
MAX INPUT POWER	5	W
IMPEDANCE	8±15%	OHM
OUTPUT SPL @ 1W/0.5M (AT 1.0, 1.4, 1.7, 2.0 kHz)	95±3	dBA
DISTORTION (MAX.)	5%	—
RESONANT FREQUENCY	230±20%	Hz
FREQUENCY RANGE	230 ~ 12,000	Hz
HOUSING MATERIAL	METAL	—
CONE MATERIAL	TREATED PAPER	—
MAGNET MATERIAL	FERRITE	—
OPERATING TEMPERATURE	-20 ~ +50	°C
WEIGHT	204	grams

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
—	RELEASED FROM ENGINEERING	9/12/05	
A	REVISED RESONANT FREQ. TOLERANCE	3/16/07	R.W.

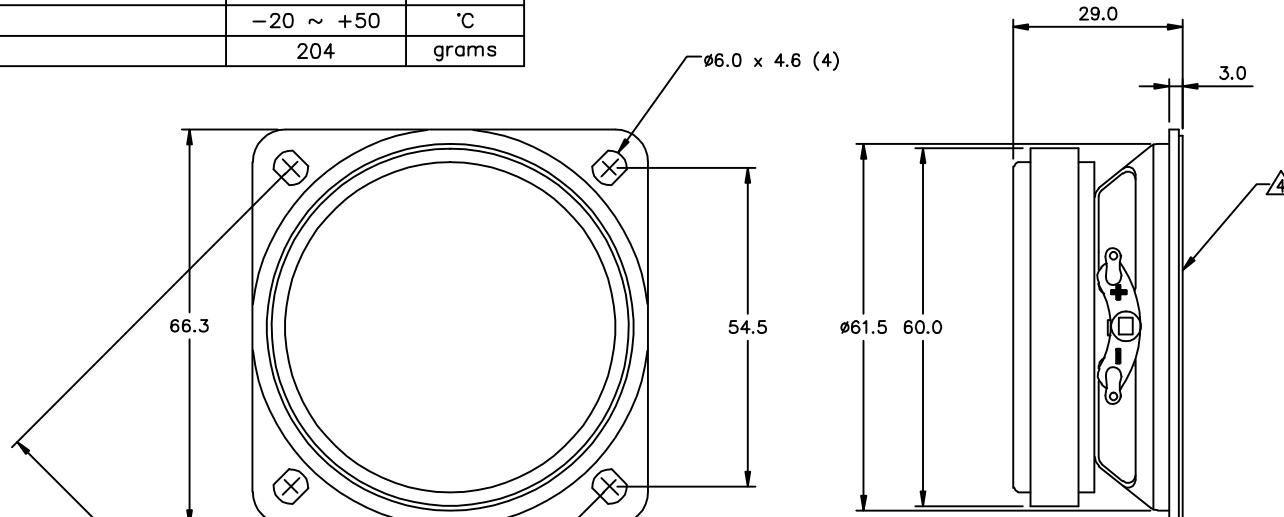

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE
OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
4. CONE HAS BEEN TREATED FOR WATER RESISTANCE.

FILE NAME
AS06608PS-WR-R.DWG

LESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3°.

APPROVALS	DATE
DRAWN J.A.F.	9/05
CHECKED B.R.	9/05
APPROVED E.P.	9/05
DO NOT SCALE DRAWING	

projects®
unlimited

Dayton, Ohio

SPEAKER

DRAWING NO.
AS06608PS-WR-R

SIZE
A

SCALE: N.T.S.

SHEET 1 OF 1