



SAW Components

Data Sheet B4180

Data Sheet

An abstract, grayscale graphic featuring a stylized, glowing globe with a grid pattern. The word "EPCOS" is written in large, bold, white letters across the globe, appearing to be part of the design.



SAW Components

B4180

Low-Loss Filter for Mobile Communication

836,50 MHz


Preliminary Data



Features

- Low-loss RF filter for mobile telephone AMPS systems, transmit path
- Usable passband 25 MHz
- No matching network required for operation at 50 Ω
- Ceramic package for Surface Mounted Technology (SMT)

Ceramic package DCC6C

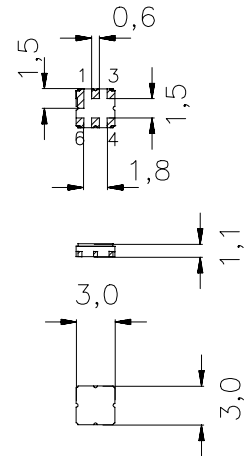


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,037g

Pin configuration

2	Input
5	Output
1,3,4,6	Ground, to be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4180	B39841-B4180-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	source impedance 50 Ω continuous wave
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
Input power max.	P_{IN}	15	dBm	



SAW Components

B4180

Low-Loss Filter for Mobile Communication

836,50 MHz

Preliminary Data



Characteristics

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
824,0 ... 849,0 MHz		—	2,2	2,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
824,0 ... 849,0 MHz		—	1,0	1,5	dB
VSWR					
824,0 ... 849,0 MHz		—	1,9	2,1	
Attenuation	α				
0,0 ... 300,0 MHz		25,0	27,0	—	dB
300,0 ... 800,0 MHz		22,0	24,0	—	dB
869,0 ... 894,0 MHz		30,0	32,0	—	dB
894,0 ... 1800,0 MHz		25,0	27,0	—	dB
1800,0 ... 2200,0 MHz		20,0	22,0	—	dB
2200,0 ... 3000,0 MHz		13,0	15,0	—	dB



SAW Components

B4180


Low-Loss Filter for Mobile Communication

836,50 MHz


Preliminary Data



Transfer function(narrowband measurement)

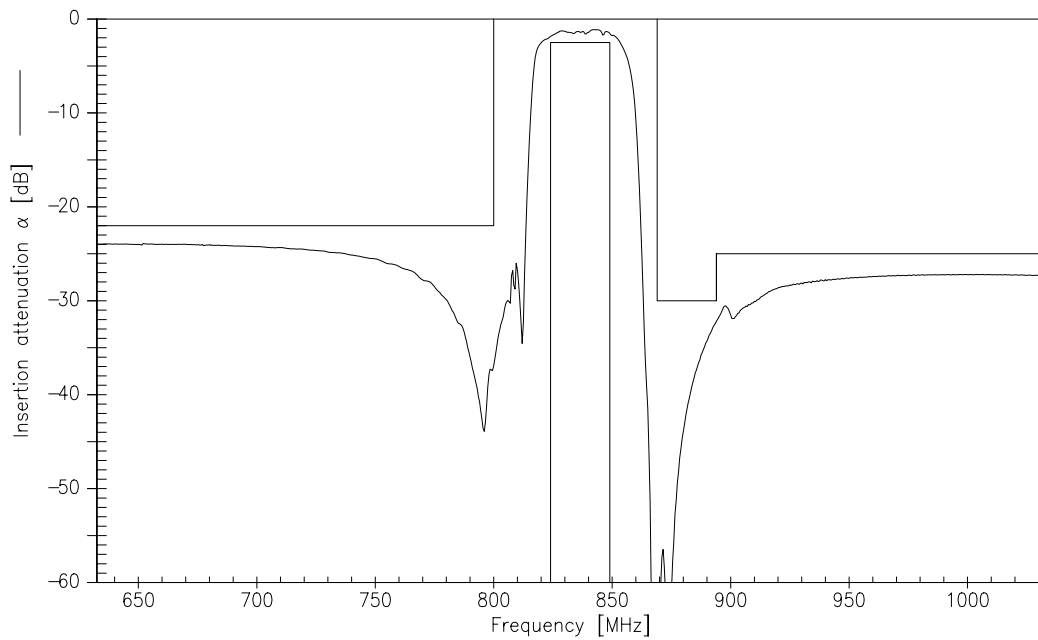

Transfer function (wideband)

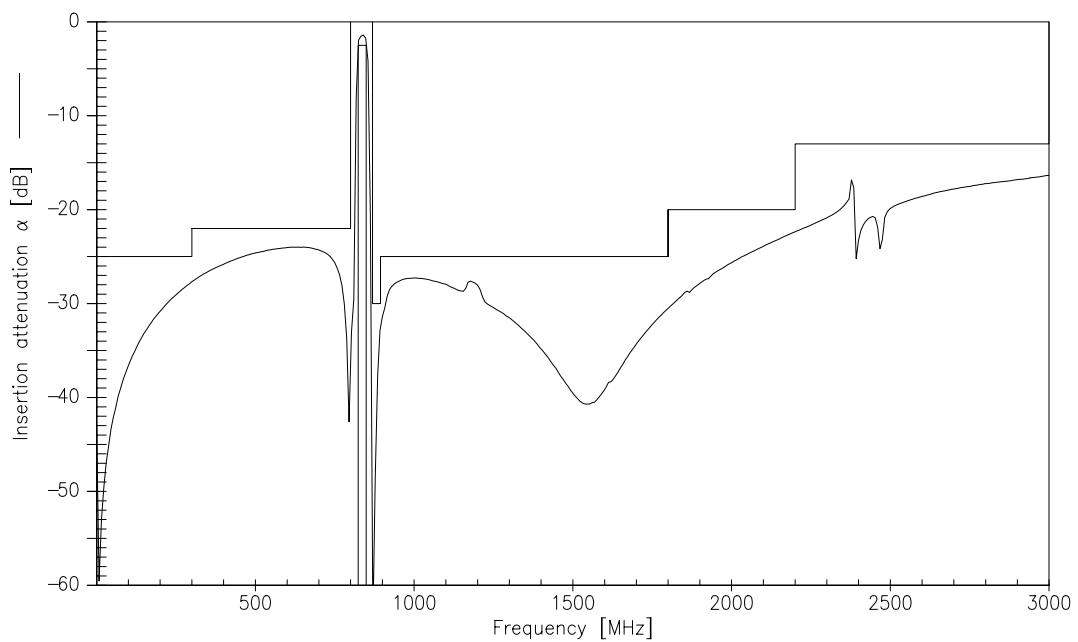



SAW Components

B4180

Low-Loss Filter for Mobile Communication



836,50 MHz

Preliminary Data





Reflection function(measurement)

S_{11}

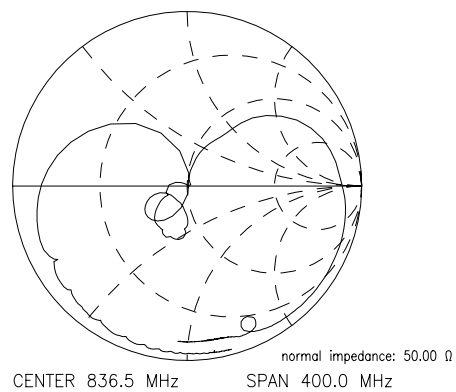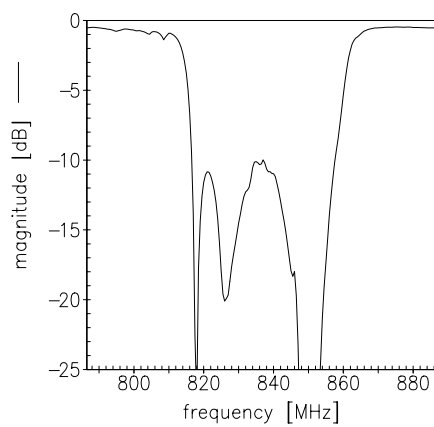

S_{22}

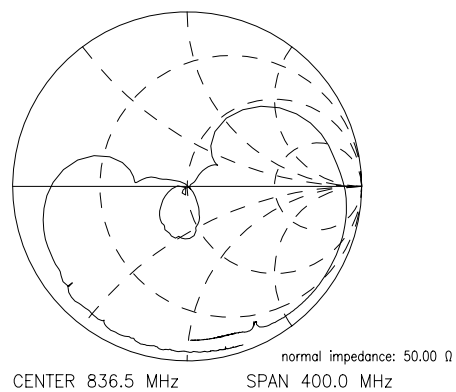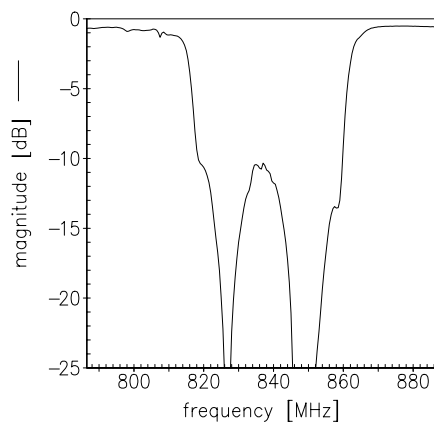



SAW Components	B4180
Low-Loss Filter for Mobile Communication	836,50 MHz
Preliminary Data	

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.