





RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X± 0.05
0.75-1.25	29.65
1.25-2.00	30.15
2.00-3.00	30.50

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
1-1a	OPEN	1-1b

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 15A 125VAC, 10A 250VAC UL APPROVED
10A 250VAC VDE APPROVED
5. MECHANICAL LIFE: > 30,000 CYCLES
6. ELECTRICAL LIFE: < 20mOHMS (INITIAL)
7. DIELECTRIC STRENGTH: > 1500V 1 min
8. OPERATING TEMPERATURE: TERMINAL SIDE: -20°C to 85°C
ROCKER SIDE: -20°C to 55°C
9. FLAMABILITY: UL94 V-2
10. ▲ DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

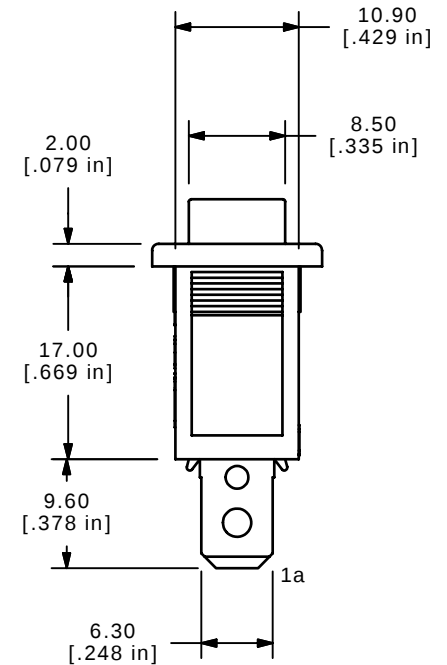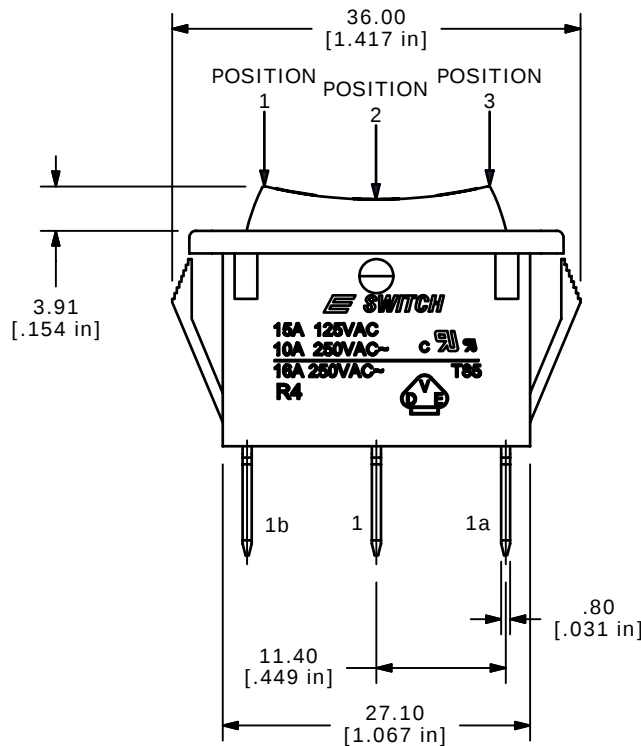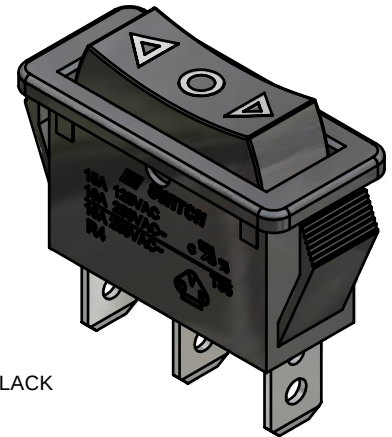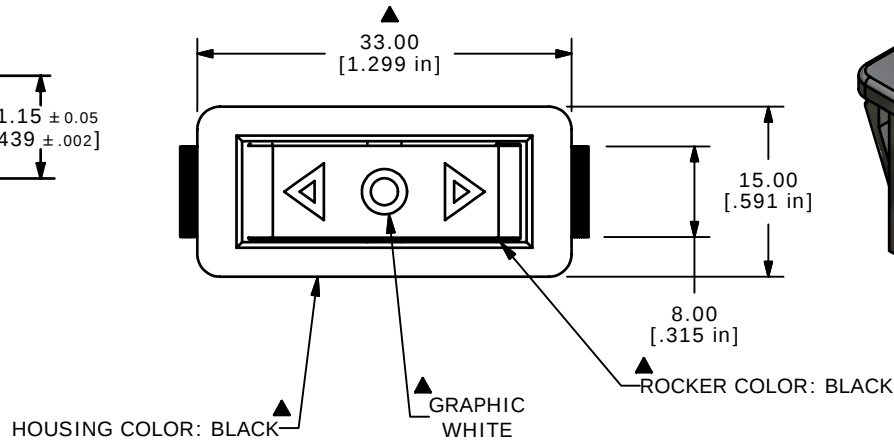

E-SWITCH®

C	15996	UPDATE NOTES AND DIMS	5/2/06	CT
B	15817	REVISE AND REDRAWN	2/23/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE R4DBLKBLKHFO

SCALE 1:1

DATE 7/11/2000

DR GLG

DWG M040114

REV C