


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X ± 0.05
0.75-1.25	29.65
1.25-2.00	30.15
2.00-3.00	30.50



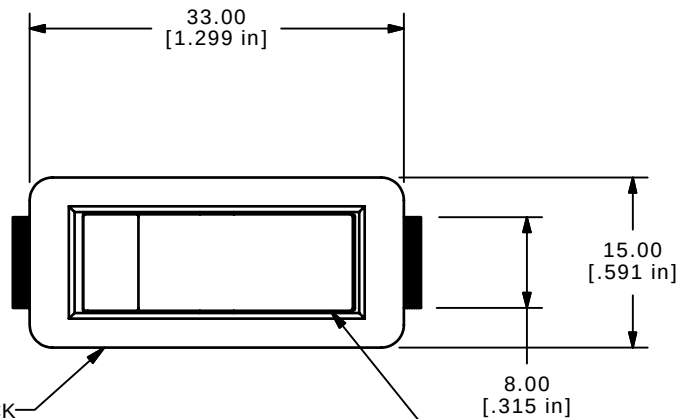
CURCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
1-1a	OPEN	1-1b

(ON)=MOMENTARY

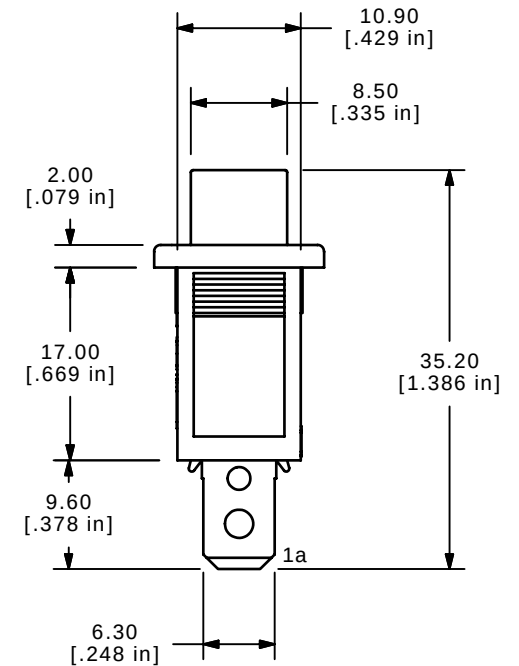
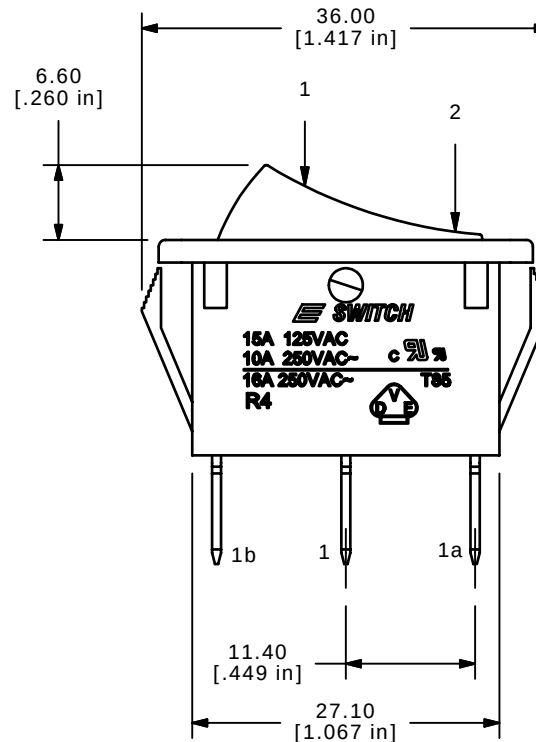
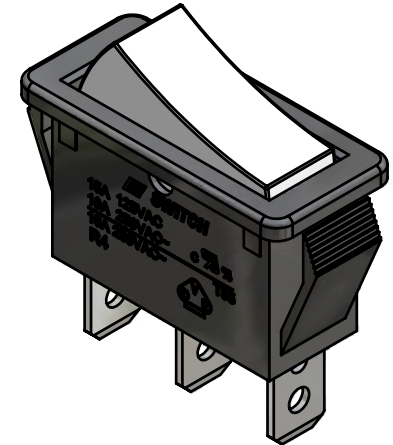
NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 15A 125VAC, 10A 250VAC
5. MATERIAL: BODY & ROCKER, NYLON 6/6 UL94 V-2
- ▲ 6. LAMP VOLTAGE: NO LAMP
7. ▲ DENOTES CRITICAL PARAMETER.
8. 2002/95/EC (ROHS) COMPLIANT



▲HOUSING COLOR: BLACK

ROCKER COLOR: WHITE▲

**E-SWITCH®**

TITLE R4GBLKWHTEF0

SCALE 1:1

DATE 3/29/2006

DR --

DWG M040216

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	15916	REVISED REDRAWN	3/29/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY