



PANEL THICKNESS	X dimension
0.75~1.25 [0.030~0.049]	30.0 +0.2 [1.181]
1.25~2.0 [0.049~0.079]	30.2 +0.2 [1.189]
2.0~3.0 [0.079~.118]	30.6 +0.2 [1.205]

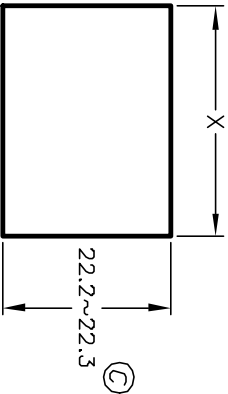

RECOMMENDED PANEL MOUNTING

NOT TO SCALE




CIRCUIT: DPDT

ON-ON



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 20A @125VAC;
15A @250VAC. (Normal Conditions)
5. MATERIAL:
CONTACT SURFACE: Coin Silver, Silver Plated.
TERMINAL: Copper ALLOY w/Silver plate
6. ELECTRICAL LIFE: ≥10,000 cycles
7. MECHANICAL LIFE: 30,000 cycles
8. CONTACT RESISTANCE: <20 mΩ--Ohms initial
9. DIELECTRIC STRENGTH: >1,500V AC 1min
>3,000V between poles.

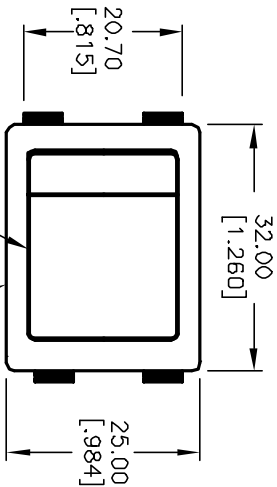

RED ACTUATOR

BLACK BODY/HOUSING

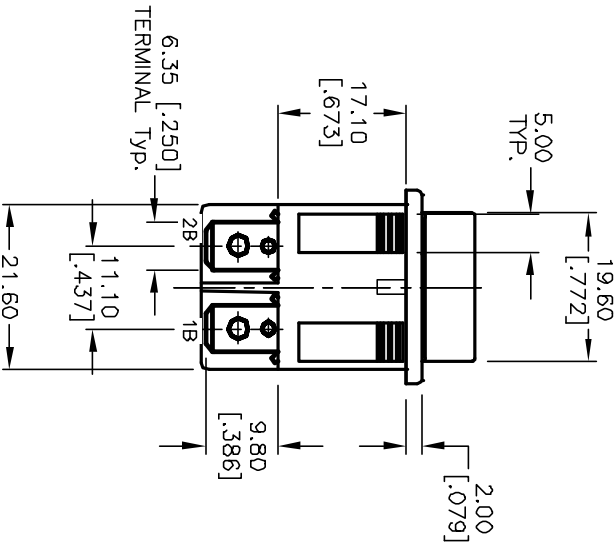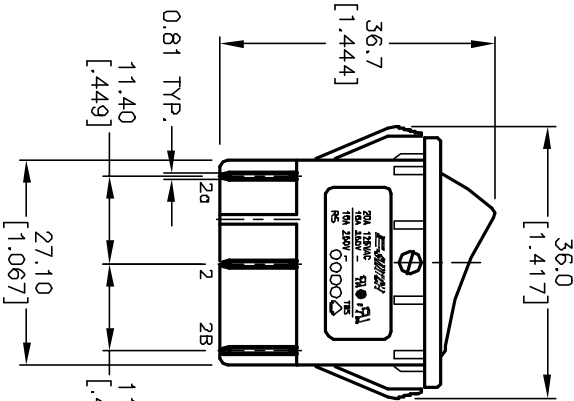

E-SWITCH®			
TITLE			
R5C BLK RED E F 0			
SCALE			
1:1			
DATE			
9/28/01			
DR			
CJB			
DWG			
M050217			
REV			
C			