


REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/20/2006

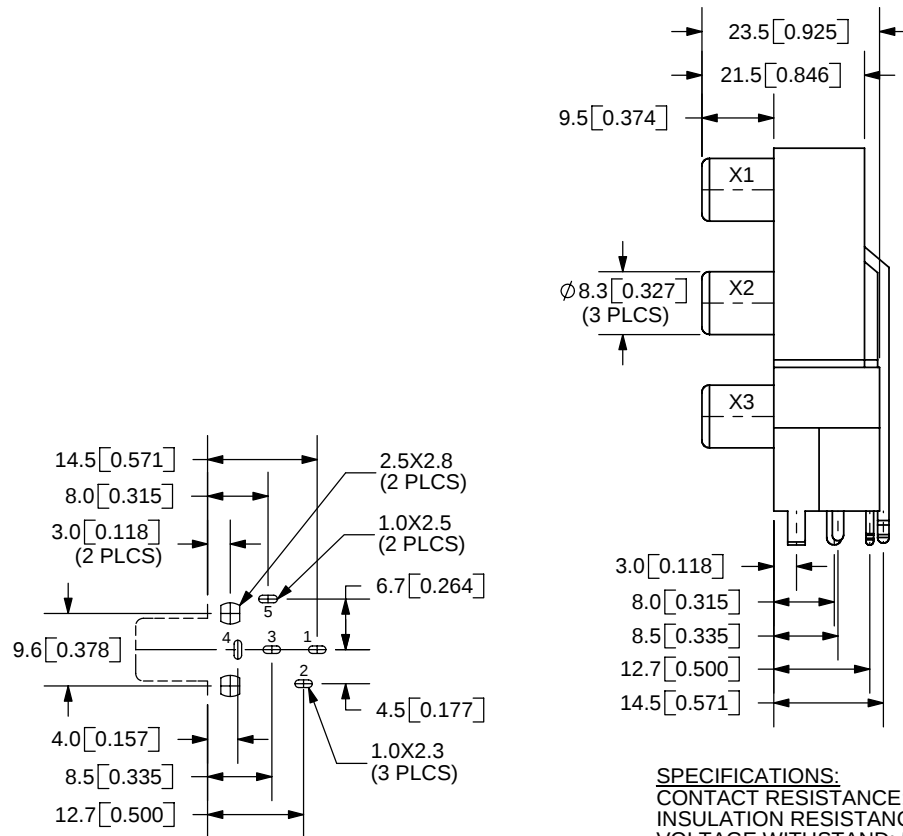

SPECIFICATIONS:

CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

COLOR INDEX

PART NO.	INPUT X1	INPUT X2	INPUT X3
RCJ-33234	Red Color	White Color	Yellow Color
RCJ-33X1 X2 X3	Color X1	Color X2	Color X3

TOLERANCE:
 ±0.3mm UNLESS OTHERWISE
 SPECIFIED



MODEL NO.	RCJ-33XXX
SCHEMATIC	X1 ☒ 1 X2 ☒ 2 X3 ☒ 3 X4 ☒ 4

COLOR CHART
1 Black
2 Red
3 White
4 Yellow
5 Blue
6 Green
7 Orange

	MATERIAL	PLATING
BARRELS	Brass	Nickel
TERMINAL 1	Brass	Silver
TERMINAL 2	Brass	Silver
TERMINAL 3	Brass	Silver
HOUSING 1	ABS	Black Color
HOUSING 2	ABS	Black Color
INPUT X1	PBT	see color index
INPUT X2	PBT	see color index
INPUT X3	PBT	see color index



CUI INC

9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

TITLE: RCA Jack, Dual, Rt Angle, PCB Mount, Vert.	REV: A
PART NO. RCJ-33XXX	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 1:1

PC FILE NAME:
 RCJ-33XXX

COPYRIGHT 2006 BY CUI INC.