

Power Relay RM 2/3/7

- 2 / 3 pole 10 / 16 A, 2 CO or 3 CO contacts
- Switching capacity up to 6000 VA
- DC- or AC-coil
- Mechanical indicator
- Push-to-test button
- Plug-in version, PCB terminals, chassis- or DIN-rail mount

Applications

Elevator control, power supplies



F0163-B

Approvals

VDE REG.-Nr. 40003144, **CE** us E214025
Technical data of approved types on request

Contact data	RM2	RM3	RM7
Contact configuration	2 CO	3 CO	3 CO
Contact set	single contact		
Type of interruption	micro disconnection		
Rated voltage / max. switching voltage AC	400 / 440 VAC		
Rated current	16 A	10 A	16 A
Maximum breaking capacity AC	6000 VA	3800 VA	6000 VA
Limiting making capacity, max 20 ms	40 A	40 A	40 A
Contact material	AgCdO		
Rated frequency of operation with / without load	16/100 min ⁻¹		
Operate- / release time DC coil	max 15/10 ms		
Bounce time DC coil NO / NC contact	max 4 / 6 ms		

Contact ratings

Type	Contact	Load	Ambient temp. [°C]	Cycles
------	---------	------	--------------------	--------

IEC 61810

RM20	CO	16 A, 400 VAC, cosφ=1	35°C	100x10 ³
RM30	CO	10 A, 400 VAC, cosφ=1	35°C	100x10 ³
RM70	CO	16 A, 400 VAC, cosφ=1	35°C	100x10 ³

UL 508

RM2	NO	16 A, 277 VAC, general purpose	50°C	30x10 ³
RM2	NO	16 A, 415 VAC, resistive	50°C	100x10 ³
RM20	NO	10 A, 48 VDC	50°C	30x10 ³
RM3	CO	10 A, 415 VAC, resistive	50°C	100x10 ³
RM30	NO / NC	10 A, 277 VAC, general purpose	50°C	30x10 ³
RM7	NO	16 A, 415 VAC, resistive	50°C	100x10 ³
RM7	NO / NC	16 A, 277 VAC, general purpose	50°C	30x10 ³




Coil data	RM2	RM3	RM7
Rated coil voltage range DC coil	6...220 VDC		
AC coil	6...400 VAC		
Operative range to IEC 61810	2		

Coil versions, DC-coil

Coil code	STD	LED	PD*	LED+	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ohm	Rated coil power W
bipolar				PD*					

Coil versions, DC-coil, RM2, RM3

006	L06	0A6	LA6	6	4.5	0.6	32±10%	1.1
012	L12	0B2	LB2	12	9.0	1.2	110±10%	1.3
024	L24	0C4	LC4	24	18.0	2.4	475±10%	1.2
048	L48	0E8	LE8	48	36.0	4.8	2000±10%	1.2
060	L60	0G0	LG0	60	45.0	6.0	2850±10%	1.3
110	M10	1B0	MB0	110	82.5	11.0	10000±12%	1.2
221	N21	2C1	NC1	220	165.0	22.0	40000±15%	1.2

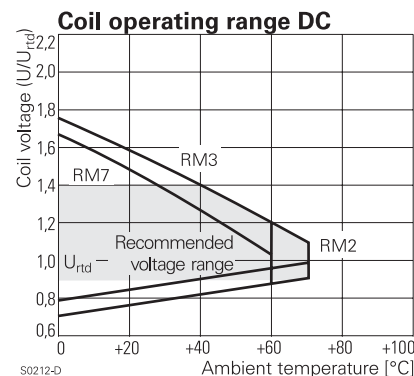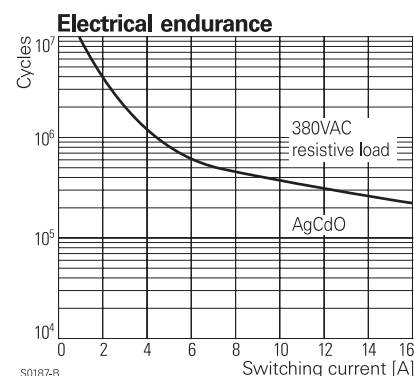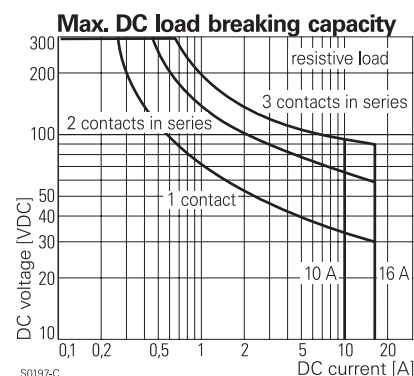

Power Relay RM 2/3/7 (Continued)

Coil versions, DC-coil, RM7

Coil code	STD	LED	PD*	LED+	Rated voltage	Operate voltage	Release voltage	Coil resistance	Rated coil power
	bipolar			PD*	VDC	VDC	VDC	Ohm	W
006	L06	0A6		LA6	6	4.5	0.6	24±10%	1.5
012	L12	0B2		LB2	12	9.0	1.2	86±10%	1.7
024	L24	0C4		LC4	24	18.0	2.4	345±10%	1.7
048	L48	0E8		LE8	48	36.0	4.8	1340±10%	1.7
060	L60	0G0		LG0	60	45.0	6.0	2200±10%	1.6
110	M10	1B0		MB0	110	82.5	11.0	7300±10%	1.7
221	N21	2C1		NC1	220	165.0	22.0	30000±15%	1.6

All figures are given for coil without preenergization, at ambient temperature +23°C

*) Protection diode PD; standard polarity: +A1 / -A2

Coil versions, AC-coil 50 / 60 Hz

Coil code	STD	LED	Rated voltage	Operate voltage	Release voltage	Coil resistance	Rated coil power
			VAC	50 / 60 Hz VAC	50 / 60 Hz VAC	Ohm	50 / 60 Hz VA

Coil versions, AC-coil, RM2, RM3

506	R06	6	4.8 / 5.1	2.4	5.3±10%	2.29/1.98
512	R12	12	9.6 / 10.2	4.8	24±10%	2.19/1.86
524	R24	24	19.2 / 20.4	9.6	86±10%	2.26/ 1.95
548	R48	48	38.4 / 40.8	19.2	345±10%	2.28/1.97
560	R60	60	48.0 / 51.0	24.0	544±10%	2.27/1.96
615	S15	115	92.0 / 97.8	46.0	2000±10%	2.37/2.00
730	T30	230	184.0 / 195.5	92.0	8300±12%	2.32/ 1.96
900	V00	400	320.0 / 340.0	160.0	27500±15%	2.31/1.96

Coil versions, AC-coil, RM7

506	R06	6	4.8 / 5.1	2.4	4.7±10%	2.86/2.36
512	R12	12	9.6 / 10.2	4.8	19.5±10%	2.71/2.27
524	R24	24	19.2 / 20.4	9.6	80±10%	2.62/2.00
548	R48	48	38.4 / 40.8	19.2	320±10%	2.60/2.17
560	R60	60	48.0 / 51.0	24.0	500±10%	2.62/2.20
615	S15	115	92.0 / 97.8	46.0	1850±10%	2.65/2.22
730	T30	230	184.0 / 195.5	92.0	7500±10%	2.69/ 2.26
900	V00	400	320.0 / 340.0	160.0	23500±15%	2.61/2.20

All figures are given for coil without preenergization, at ambient temperature +23°C


Insulation

Dielectric strength coil-contact circuit	2500 V _{rms}
open contact circuit	1500 V _{rms}
adjacent contact circuits	2500 V _{rms}
Clearance / creepage coil-contact circuit	≥ 4.0/14.9 mm
adjacent contact circuits	≥ 6.1/7.3 mm
Material group of insulation parts	IIIa
Insulation to IEC 61810-1	
Type of insulation coil-contact circuit	basic
open contact circuit	micro disconnection
adjacent contact circuits	basic
Rated insulation voltage	250 V
Pollution degree	3
Rated voltage system	230 / 400 V
Overvoltage category	III

Other data


	RM2	RM3	RM7
Mechanical endurance	20x10 ⁶ cycles		
Material			
RoHS - Directive 2002/95/EC	compliant as per product date code 0415		
Environment			
Ambient temperature range DC coil	-45...+70°C	-45...+60°C	-45...+60°C
AC coil	-45...+55°C	-45...+55°C	-45...+50°C
Vibration resistance (function) NO/NC	5/2 g	5/2 g	12/4 g
Category of protection	RT1 - dust protected		
Processing			
Resistance to soldering heat	270°C / 10 s		
Relay weight	81 g		
Packaging unit	10/25 pcs		

Coil operating range AC

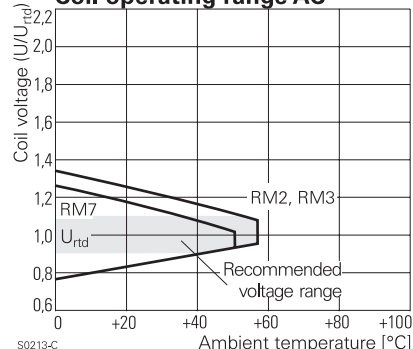


PCB layout / terminal assignment

Bottom view on pins




S0269-AA

3 CO contacts



S0269-AB

2 CO contacts



S0269-AD

Power Relay RM 2/3/7 (Continued)

Accessories



For details see datasheet

Accessories Power Relay RM



NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1, table 12); for relays mounted on sockets deratings may apply.

Dimensions



Plain cover, plug-in version





PCB version



Cover with mounting brackets, 6.3 mm quick connect (4.8 mm available)

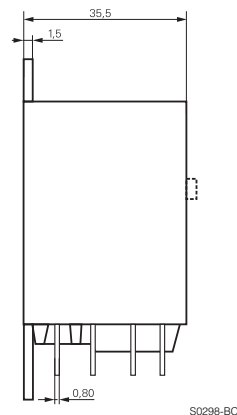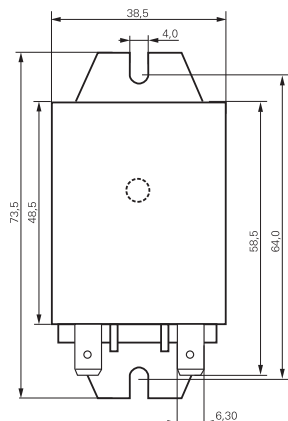

Cover with DIN-snap-on attachment (6.3 mm quick connect only)
horizontal vertical

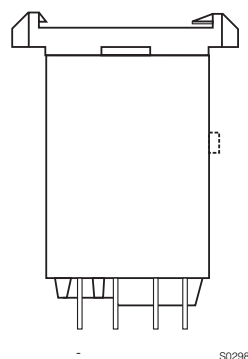

Product key

Typical product key

RM 7 0 2 730

Type

RM Power relay RM 2/3/7

Contact configuration

2 2 CO contacts (2 form C), 16 A
3 3 CO contacts (3 form C), 10 A

7 3 CO contacts (3 form C), 16 A

Version

0 AgCdO, without test button

3 AgCdO, with test button

Enclosure

2 plain cover, 4.8 mm quick connect terminals
3 cover with mounting brackets, 4.8 mm quick connect terminals
5 cover with mounting brackets, 6.3 mm quick connect terminals
7 PCB version
8 cover with DIN-snap-on attachment, horizontal, 6.3 mm quick connect terminals
9 cover with DIN-snap-on attachment, vertical, 6.3 mm quick connect terminals

Coil

Coil code: please refer to coil versions table, preferred types in bold print

Power Relay RM 2/3/7 (Continued)

Product key	Contacts	Version	Enclosure	Coil	Coil	Part number		
RM202024	2 CO contacts 16 A	without test button	plain cover	DC-coil	24 VDC	8-1393149-2		
RM202524			quick c. 4.8 mm	AC-coil	24 VAC	1-1393146-9		
RM202615					115 VAC	2-1393146-0		
RM202730					230 VAC	1-1393148-4		
RM203024			mounting brackets quick c. 4.8 mm	DC-coil	24 VDC	1-1393148-6		
RM203524				AC-coil	24 VAC	2-1393146-5		
RM203615					115 VAC	2-1393146-6		
RM203730					230 VAC	2-1393146-8		
RM205024			mounting brackets quick c. 6.3 mm	DC-coil	24 VDC	2-1393146-9		
RM205524				AC-coil	24 VAC	3-1393146-0		
RM205615					115 VAC	3-1393146-1		
RM205730					230 VAC	3-1393146-2		
RM207024			PCB version	DC-coil	24 VDC	3-1393146-3		
RM207615				AC-coil	115 VAC	8-1393149-5		
RM207730					230 VAC	3-1393146-4		
RM208024			DIN-snap-on horizontal	DC-coil	24 VDC	3-1393146-5		
RM208730		AC-coil		230 VAC	8-1393149-6			
RM209730		DIN vertical		230 VAC	3-1393146-6			
RM232024		with test button	plain cover	DC-coil	24 VDC	3-1393146-8		
RM232524			quick c. 4.8 mm	AC-coil	24 VAC	3-1393146-9		
RM232615					115 VAC	4-1393146-0		
RM232730					230 VAC	3-1393107-4		
RM233024			mounting brackets quick c. 4.8 mm	DC-coil	24 VDC	3-1393107-5		
RM233615				AC-coil	115 VAC	4-1393146-2		
RM235024				DC-coil	24 VDC	8-1393149-8		
RM235730				AC-coil	230 VAC	4-1393146-5		
RM239730			DIN vertical		230 VAC	4-1393148-7		
RM302024			3 CO contacts 10 A	without test button	plain cover	DC-coil	24 VDC	8-1393149-9
RM302524					quick c. 4.8 mm	AC-coil	24 VAC	5-1393146-3
RM302615							115 VAC	5-1393146-4
RM302730							230 VAC	5-1419150-3
RM303024					mounting brackets quick c. 4.8 mm	DC-coil	24 VDC	6-1393148-4
RM303615	AC-coil					115 VAC	5-1393146-5	
RM303730						230 VAC	5-1393146-7	
RM307024	DC-coil	24 VDC				7-1393148-2		
RM307730	AC-coil	230 VAC			5-1393146-9			
RM332024	with test button	plain cover quick c. 4.8 mm			DC-coil	24 VDC	9-1393149-2	
RM332524					AC-coil	24 VAC	9-1393149-3	
RM332730						230 VAC	9-1393149-4	
RM333024					mount. br. q.c.4.8	DC-coil	24 VDC	9-1393149-6
RM335730					mount. br. q.c.6.3	AC-coil	230 VAC	6-1393107-1
RM338730					DIN horizontal		230 VAC	7-1393148-7
RM339730					DIN vertical		230 VAC	6-1393107-2
RM702024	3 CO contacts 16 A	without test button	plain cover	DC-coil	24 VDC	8-1393146-5		
RM702524			quick c. 4.8 mm	AC-coil	24 VAC	1393844-9		
RM702615					115 VAC	1-1393844-0		
RM702730					230 VAC	1-1393844-1		
RM703024			mounting brackets quick c. 4.8 mm	DC-coil	24 VDC	1-1393844-2		
RM703524				AC-coil	24 VAC	9-1393146-1		
RM703615					115 VAC	9-1393146-2		
RM703730					230 VAC	9-1393146-4		
RM705024			mounting brackets quick c. 6.3 mm	DC-coil	24 VDC	9-1393146-6		
RM705524				AC-coil	24 VAC	9-1393146-7		
RM705615					115 VAC	1-1393844-4		
RM705730					230 VAC	1-1393844-5		
RM707024			PCB version	DC-coil	24 VDC	9-1393146-8		
RM707524				AC-coil	24 VAC	1393147-1		
RM707730					230 VAC	1393147-2		
RM708024			DIN horizontal quick c. 6.3 mm	DC-coil	24 VDC	1393147-4		
RM708730		AC-coil		230 VAC	1-1419136-0			
RM709024		DIN vertical	DC-coil	24 VDC	2-1393149-2			
RM709730			AC-coil	230 VAC	1393147-5			
RM732024		with test button	plain cover quick c. 4.8 mm	DC-coil	24 VDC	1-1393844-7		
RM732524				AC-coil	24 VAC	1-1393147-0		
RM732615					115 VAC	1-1393147-1		
RM732730					230 VAC	1-1393844-8		
RM733730				mount.br. q.c. 4.8		230 VAC	1-1393147-5	
RM735024					DC-coil	24 VDC	3-1393149-6	
RM735524				mounting brackets quick c. 6.3 mm	AC-coil	24 VAC	3-1393149-7	
RM735730						230 VAC	4-1393149-1	
RM737730				PCB version		230 VAC	2-1393147-0	
RM738024					DIN-snap-on	DC-coil	24 VDC	2-1393844-0
RM738730				horizontal	AC-coil	230 VAC	2-1393147-2	
RM739024				DIN-snap-on vertical	DC-coil	24 VDC	4-1393149-5	
RM739730					AC-coil	230 VAC	2-1393844-2	