

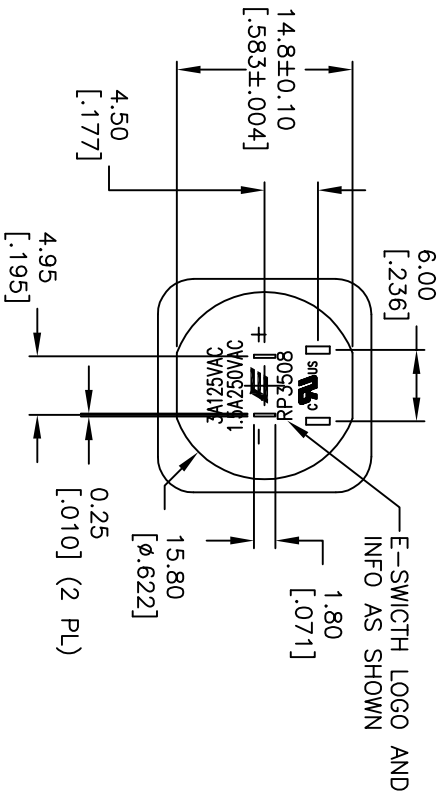
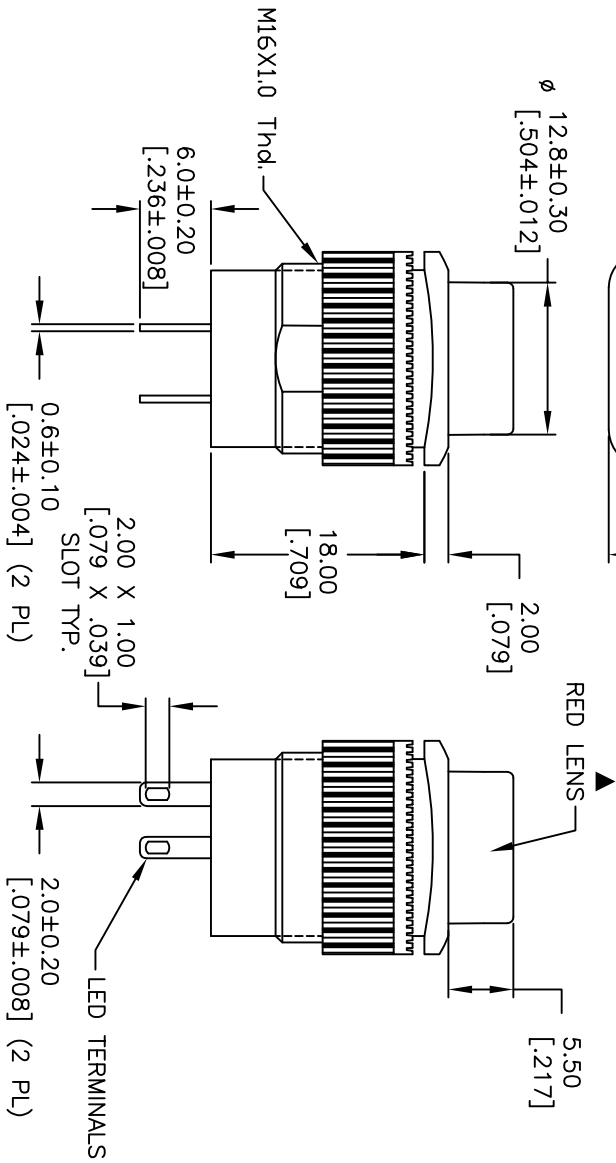


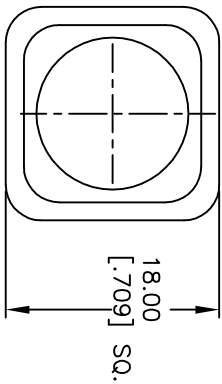


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A 125V, 1.5A 250V AC, UL & CUL APPROVED
5. CONTACT RESISTANCE: 50m ohm max.
6. INSULATION RESISTANCE: DC 500V 100Mega Ohm min.
7. DIELECTRIC STRENGTHS: AC 1500V 1 minute
8. LED: RED 3VDC
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/95/EC (ROHS) COMPLIANT

CIRCUIT: SPST



RECOMMENDED PANEL MOUNT
SCALE 1:1
7mm MAX. THICKNESS



C	17687	CHANGED ACTUATOR LENGTH	9/18/07	BF
B	14157	UPDATE DIMS, TITLE, ADD LOGO	7/9/04	AR
A	13213	RELEASED FOR PRODUCTION	6/13/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE		DATE		DR		DWG		REV	
RP3508BBLKREDREDS		9/18/07		BF		F130412		C	