



User's Guide

NHD-C12865BZ-FSW-GBW

LCM (Liquid Crystal Display Graphic Module)

COG- RoHS Compliant

NHD-	Newhaven Display
12865-	128 Lines x 65 Characters
BZ-	Version Line
F-	Transflective
SW-	Side White LED B/L
G-	STN- Gray
B-	6:00 View
W-	Wide Temperature (-20 ~ +70c)

For product support, contact

Newhaven Display International, LLC
2511 Technology Drive, #101
Elgin, IL 60124
Tel: (847) 844-8795 Fax: (847) 844-8796

November 17, 2008

DOCUMENT REVISION HISTORY

Version	DATE	DESCRIPTION	CHANGED BY
00	MAY-17-2007	First issue	

CONTENTS

Item	Page
Functions & Features	3
Mechanical specifications	3
Dimensional Outline	4
Absolute maximum ratings	5
Pin description	5
Optical characteristics	5
Electrical characteristics	6
Absolute Maximum Ratings	6
Timing characteristics	7-10
Commands	11-12
Quality Specifications	13-20

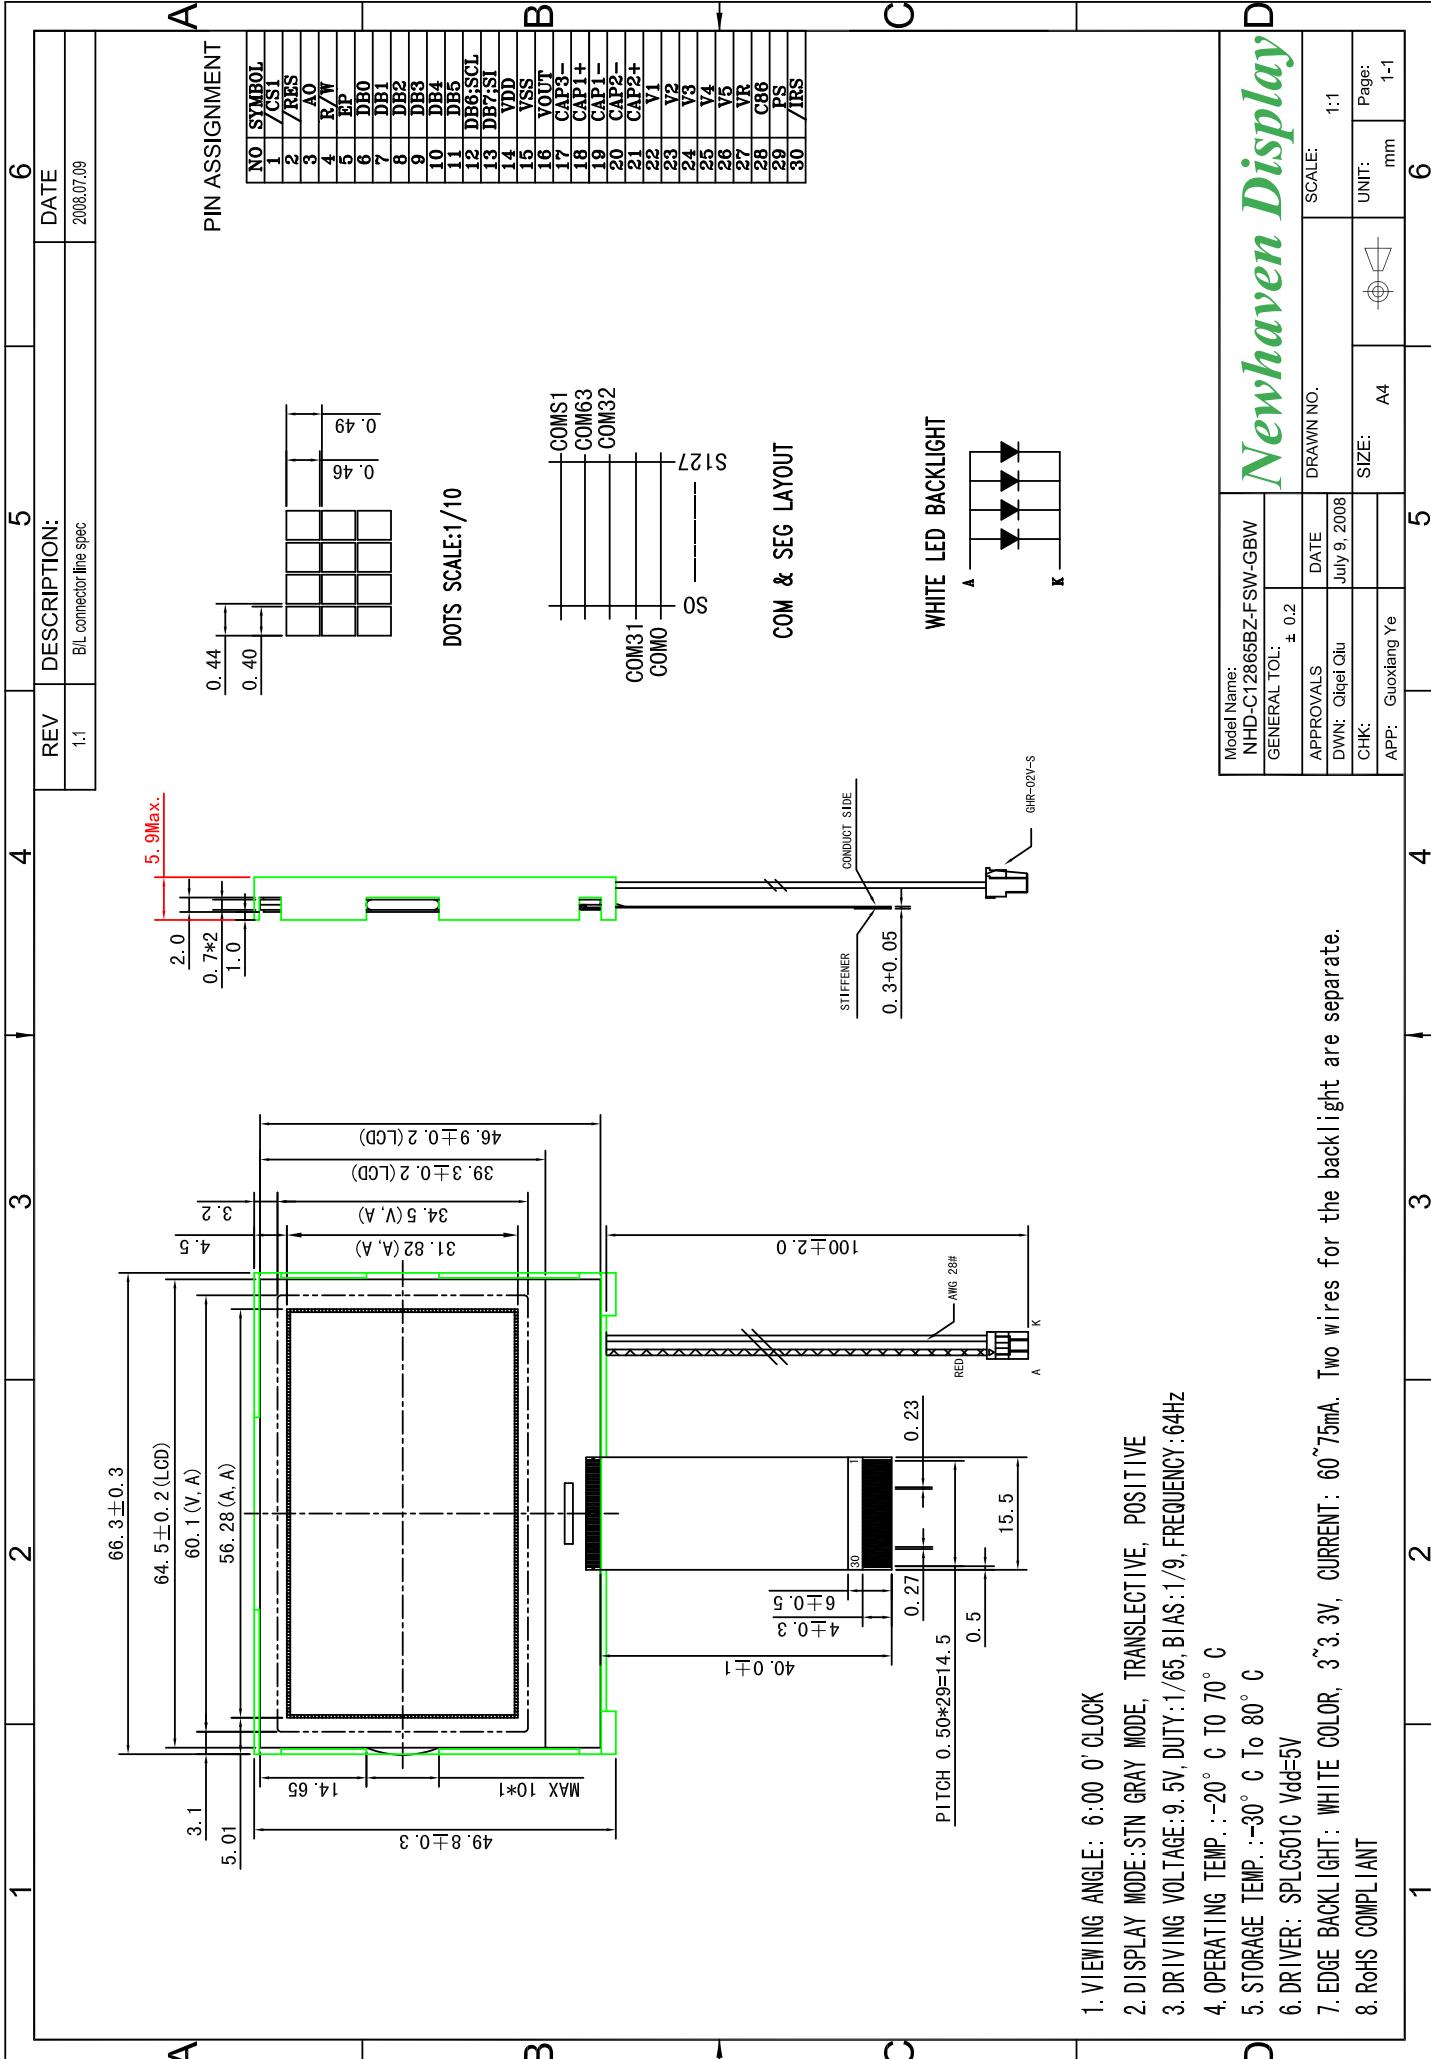
1. Features

2. 128X65 dots
3. Built-in controller (SPLC501C)
4. +5.0V power supply
5. 1/64 duty cycle; 1/9 bias
6. BKL to be driven by A, K.

LCD type	<input checked="" type="checkbox"/> FSTN positive		<input type="checkbox"/> FSTN Negative
	<input type="checkbox"/> STN Yellow Green	<input type="checkbox"/> STN Gray	<input type="checkbox"/> STN-Blue
View direction	<input checked="" type="checkbox"/> 6 O'clock	<input type="checkbox"/> 12 O'clock	
Rear Polarizer	<input type="checkbox"/> Reflective	<input checked="" type="checkbox"/> Transflective	<input type="checkbox"/> Transmissive
Backlight Type	<input checked="" type="checkbox"/> LED	<input type="checkbox"/> EL	<input type="checkbox"/> Internal Power
		<input type="checkbox"/> CCFL	<input checked="" type="checkbox"/> External Power
Backlight Color	<input type="checkbox"/> White	<input type="checkbox"/> Amber	<input type="checkbox"/> Blue-Green
			<input checked="" type="checkbox"/> Yellow-Green
Temperature Range	<input checked="" type="checkbox"/> Normal	<input type="checkbox"/> Wide	<input type="checkbox"/> Super Wide
DC to DC circuit	<input checked="" type="checkbox"/> Build-in	<input type="checkbox"/> Not Build-in	
El Driver IC	<input type="checkbox"/> Build-in	<input checked="" type="checkbox"/> Not Build-in	
Touch screen	<input type="checkbox"/> With	<input type="checkbox"/> Without	
Font type	<input type="checkbox"/> English-Japanese	<input type="checkbox"/> English-Euro	<input type="checkbox"/> English-Russian
			<input checked="" type="checkbox"/> other

2. MECHANICAL SPECIFICATIONS

Module size	66.3mm(L)*49.8mm(W)* Max5.9(H)mm
Viewing area	60.1mm(L)*34.5mm(W)
Dots size	0.40mm(L)*0.46mm(W)
Dots pitch	0.44mm(L)*0.49mm(W)
Weight	Approx.



4. Absolute maximum ratings

Item	Symbol	Standard			Unit
Power voltage	$V_{DD}-V_{SS}$	0	-	7.0	V
Input voltage	V_{IN}	V_{SS}	-	V_{DD}	
Operating temperature range	V_{OP}	-20	-	+70	°C
Storage temperature range	V_{ST}	-30	-	+80	

5. Interface pin description

Pin no.	Symbol	External connection	Function
1	/CS	MPU	Used to enter chip select signal
2	/RESET	MPU	Controller reset (module reset)
3	A0	MPU	Register select signal
4	R/W	MPU	Read/write select signal
5	E	MPU	Operation (data read/write) enable signal
6~10	DB0~DB3	MPU	Four low order bi-directional three-state data bus lines. Used for data transfer between the MPU and the LCM. These four are not used during 4-bit operation.
11~13	DB4~DB7	MPU	Four high order bi-directional three-state data bus lines. Used for data transfer between the MPU
14	V_{DD}	Power supply	Power supply for logic (+5V) for LCM
15	V_{SS}		Signal ground for LCM (GND)
16	VOUT		DC/DC voltage converter.
17	CAP3-		
18	CAP1+		
19	CAP1-		
20	CAP2-		
21	CAP2+		
22	V1	Power for LCD	A multi-level power supply for the liquid crystal drive.
23	V2		
24	V3		Output voltage regulator terminal.
25	V4		
26	V5		This is the MPU interface switch terminal.
27	VR		
28	C86	MPU	This is the parallel input/serial data input switch terminal.
29	PS	MPU	This terminal selects the resistors for the V5 voltage level adjustment.
30	IRS	MPU	

7. Optical characteristics

STN type display module ($T_a=25^\circ\text{C}$, $VDD=5.0\text{V}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Viewing angle	θ	$C_r \geq 2$	-60	-	35	deg
	Φ		-40	-	40	
Contrast ratio	C_r		-	6	-	-
Response time (rise)	T_r	-	-	150	250	ms
Response time (fall)	T_f	-	-	150	250	

8. Electrical characteristics


DC characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage for LCD	$V_{DD}-V_0$	$T_a = 25^\circ C$	-	9.5	-	V
Input voltage	V_{DD}		4.7	5.0	5.5	
Supply current	I_{DD}	$T_a = 25^\circ C, V_{DD} = 5.0V$	-	1.5	2.5	mA
Input leakage current	I_{LKG}		-	-	1.0	uA
"H" level input voltage	V_{IH}		2.2	-	V_{DD}	
"L" level input voltage	V_{IL}	Twice initial value or less	0	-	0.6	
"H" level output voltage	V_{OH}	$LOH = -0.25mA$	2.4	-	-	V
"L" level output voltage	V_{OL}	$LOH = 1.6mA$	-	-	0.4	
Backlight supply voltage	V_F		-	3.0	-	
Backlight supply current	I_{LED}	$V_F = 3.2V$	60	-	75	mA

8. Absolute Maximum Ratings


(Unless otherwise noted, $VSS = 0V$)

Parameter	Symbol	Conditions	Unit
Power Supply Voltage	VDD	-0.3 to +7.0	V
Power supply voltage (2) (VDD Standard)	$VSS2$	-7.0 to +0.3 -4.0 to +0.3 -3.0 to +0.3	V
Power supply voltage (3) (VDD standard)	$V5, Vout$	-12.0 to +0.3	V
Power supply voltage (4) (VDD standard)	$V1, V2, V3, V4$	$V5$ to +0.3	V
Input Voltage	Vin	-0.3 to $VDD + 0.3$	V
Output voltage	Vo	-0.3 to $VDD + 0.3$	V
Operating Temp.	$Topr$	-40 to 85	C
Storage Temp.	$Tstr$	-55 to +125	C

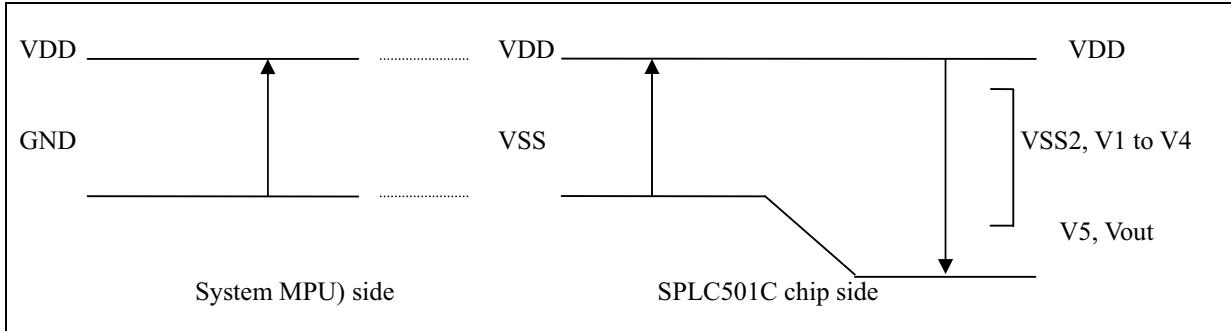

9. Timing Characteristics

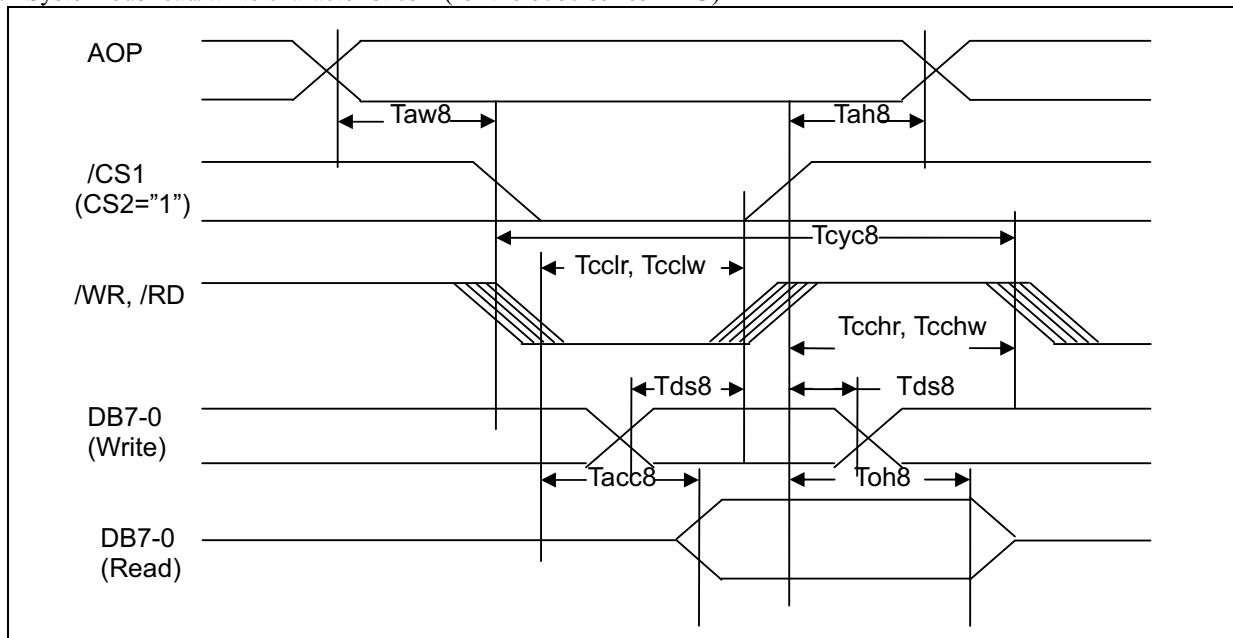9.1 System bus read/write characteristics 1 (for the 8080 series MPU)



(VDD=4.5V to 5.5V, Ta=25C)

Item	Signal	Symbol	Condition	Rating		Unit
				Min.	Max.	
Address hold time	AOP	Tah8		0	-	ns
Address setup time	AOP	Taw8		0	-	ns
System cycle time	AOP	Tcyc8		166	-	ns
Control L pulse with (/WR)	/WR	Tcclw		30	-	ns
Control L pulse with (/RD)	/RD	Tcclr		70	-	ns
Control H pulse with (/WR)	/WR	Tcchw		30	-	ns
Control H pulse with (/RD)	/RD	Tcchr		30	-	ns
Data setup time	DB7-0	Tds8		30	-	ns
Address hold time		Tdh8		10	-	ns
/RD access time		Tacc8	Cl=100pF	-	70	ns
Output disable time		Toh8	Cl=100pF	5.0	50	ns

Item	Signal	Symbol	Condition	Rating		Unit
				Min.	Max.	
Address hold time	AOP	Tah8		0	-	ns
Address setup time		Taw8		0	-	ns
System cycle time	AOP	Tcyc8		300	-	ns
Control L pulse with (/WR)	/WR	Tcclw		60	-	ns
Control L pulse with (/RD)	/RD	Tcclr		120	-	ns
Control H pulse with (/WR)	/WR	Tcchw		60	-	ns
Control H pulse with (/RD)	/RD	Tcchr		60	-	ns
Data setup time		Tds8		40	-	ns
Address hold time		Tdh8		15	-	ns
/RD access time		Tacc8	Cl=100pF	-	140	ns
Output disable time		Toh8	Cl=100pF	10	100	ns

(VDD=2.4V to 2.7V, Ta=25C)


Item	Signal	Symbol	Condition	Rating		Unit
				Min.	Max.	
Address hold time	AOP	Tah8		0	-	ns
Address setup time		Taw8		0	-	ns
System cycle time	AOP	Tcyc8		1000	-	ns
Control L pulse with (/WR)	/WR	Tcclw		120	-	ns
Control L pulse with (/RD)	/RD	Tcclr		240	-	ns
Control H pulse with (/WR)	/WR	Tcchw		120	-	ns
Control H pulse with (/RD)	/RD	Tcchr		120	-	ns
Data setup time		Tds8		80	-	ns
Address hold time		Tdh8		30	-	ns
/RD access time		Tacc8	Cl=100pF	-	280	ns
Output disable time		Toh8	Cl=100pF	10	200	ns

Note1: The input signal rise time and fall time (Tr, Tf) is specified at 15 ns or less. When the system cycle time is extremely fast, (Tr-Tf) < or = (Tcyc8-Tcclw-Tcchw) for (Tr+Tf) < or = (Tcyc8-Tcclr-Tcchr) are specified.

Note2: All timing is specified using 20% and 80% of VDD as the reference.

Note3: Tcclw and Tcclr are specified as the overlap between /CS1 being "L" (/CS2 = "H") and /WR and /RD being at the "L" level.

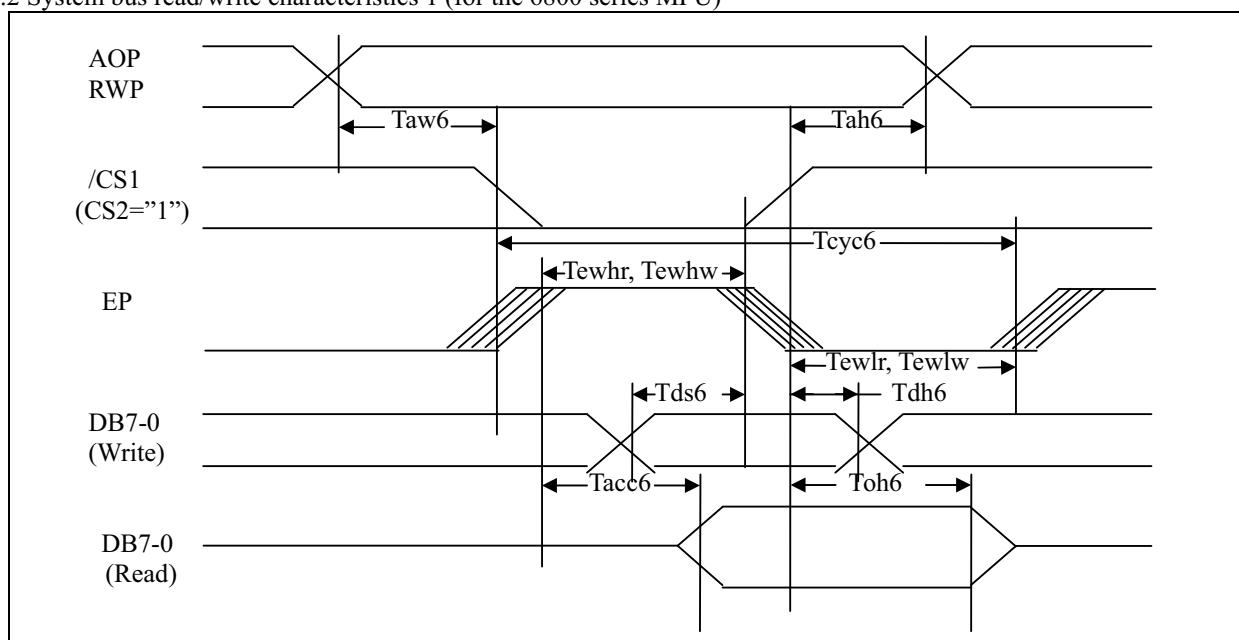9.2 System bus read/write characteristics 1 (for the 6800 series MPU)



(VDD=4.5V to 5.5V, Ta=25C)

Item	Signal	Symbol	Condition	Rating		Unit
				Min.	Max.	
Address hold time	AOP	Tah6		0	-	ns
Address setup time		Taw6		0	-	ns
System cycle time	AOP	Tcyc6		166	-	ns
Data setup time	DB7-0	Tds6	Cl=100pF	30	-	ns
Data hold time		Tdh6		10	-	ns
Access time	DB7-0	Tacc6		-	70	ns
Output disable time		Toh6		10	50	ns
Enable H pulse time	Read	Tewhr		70	-	ns
	Write	Tewhw		30	-	ns
Enable L pulse time	Read	Tewlr		30	-	ns
	Write	Tewlw		30	-	ns

(VDD=2.7V to 4.5V, Ta=25C)

Item	Signal	Symbol	Condition	Rating		Unit
				Min.	Max.	
Address hold time	AOP	Tah6		0	-	ns
Address setup time		Taw6		0	-	ns
System cycle time	AOP	Tcyc6		300	-	ns
Data setup time	DB7-0	Tds6	Cl=100pF	40	-	ns
Data hold time		Tdh6		15	-	ns
Access time	DB7-0	Tacc6		-	140	ns
Output disable time		Toh6		10	100	ns
Enable H pulse time	Read	Tewhr		120	-	ns
	Write	Tewhw		60	-	ns
Enable L pulse time	Read	Tewlr		60	-	ns
	Write	Tewlw		60	-	ns

(VDD=2.4V to 2.7V, Ta=25C)

Item	Signal	Symbol	Condition	Rating		Unit
				Min.	Max.	
Address hold time	AOP	Tah6		0	-	ns
Address setup time		Taw6		0	-	ns
System cycle time	AOP	Tcyc6		1000	-	ns
Data setup time	DB7-0	Tds6	Cl=100pF	80	-	ns
Data hold time		Tdh6		30	-	ns
Access time	DB7-0	Tacc6		-	280	ns
Output disable time		Toh6		10	120	ns
Enable H pulse time	Read	Tewhr		240	-	ns
	Write	Tewhw		120	-	ns
Enable L pulse time	Read	Tewlr		120	-	ns
	Write	Tewlw		120	-	ns

Note1: The input signal rise time and fall time (Tr, Tf) is specified at ns or less. When the system cycle time is extremely fast, (Tr+Tf) < or = (Tcyc6-Tewlw-Tewhw) for (Tr+Tf) < or = (Tcyc6-Tewlr-Tewhr) are specified.

Note2: All timing is specified using 20% and 80% of VDD as the reference.

Note3: Tewlw and Tewlr are specified as the overlap between /CS1 being "L" (CS2="H") and EP.

10. Table of LCM commands

Command	Command Code										Function					
	AOP	/RD	/WR	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0					
1) Display ON/OFF	0	1	0	1	0	1	0	1	1	0	1	LCD display ON/OFF 0: OFF, 1: ON				
2) Display start line set	0	1	0	0	1	Display start address										Set the display RAM display start line address
3) Page address set	0	1	0	1	0	1	1	Page address				Sets the display RAM page address				
4) Column address set upper bit	0	1	0	0	0	0	1	Most significant column address				Sets the most significant 4 bits of the display RAM column address				
Column address set Lower bit	0	1	0	0	0	0	0	Least significant column address				Sets the least significant 4 bits of the display RAM column address				
5) Status read	0	0	1	Status			0	0	0	0	0	Reads the status data				
6) Display data write	1	1	0	Write data									Writes the status RAM			
7) Display data read	1	0	1	Read data									Reads from the display RAM			
8) ADC select	0	1	0	1	0	1	0	0	0	0	1	Sets the display RAM address SEG output correspondence 0: normal, 1: reverse				
9) Display normal/reverse	0	1	0	1	0	0	0	1	1	0	1	Sets the LCD display normal/reverse 0: normal, 1: reverse				
10) Display all points ON/OFF	0	1	0	1	0	0	0	1	0	0	1	Display all points 0: normal display 1: all points ON				
11) LCD bias set	0	1	0	1	0	0	0	0	1	0	1	Sets the LCD driver voltage bias ratio SPLC501C.....0: 1/9, 1: 1/7				
12) Read/modify/write	0	1	0	1	1	1	0	0	0	0	0	Column address increment At write: +1 At read: 0				
13) End	0	1	0	1	1	1	0	1	1	1	0	Clear read/modify/write				
14) Reset	0	1	0	1	1	1	0	0	0	1	0	Internal reset				
15) Common output mode select	0	1	0	1	1	0	0	0	*	*	*	Select COM output scan direction 0: normal direction 1: reverse direction				
16) Power control set	0	1	0	0	0	1	0	1	Operating mode			Select internal power supply operating mode				
17) V5 voltage regulator internal resistor ratio set	0	1	0	0	0	1	0	0	Resistor ratio			Select internal resistor ratio (Rb/Ra) mode				
18) Electronic volume mode set	0	1	0	1	0	0	0	0	0	0	1	Set the V5 output voltage electronic volume register				
Electronic volume register set	0	1	0	* * Electronic volume value												
Command	Command Code										Function					
	AOP	/RD	/WR	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0					
19) Static indicator ON/OFF				1	0	1	0	1	1	0	0	0: OFF, 1: ON				
Static indicator Register set				* * * * * * * Mode									Set the flashing mode			
20) Page Blink Page selection	0	1	0	1	1	0	1	0	1	0	1			P7-0: 1 – blinking page 0 – no blinking, normal display		
	0	1	0	P7	P6	P5	P4	P3	P2	P1	P0					
21) Driving Mode set Mode selection	0	1	0	1	1	0	1	0	0	1	0			Set the driving mode register Driving capability (D1, D0): (1,1)>(0,0)>(0,1)>(1,0)		
22) Power saver													Display OFF and display all points ON compound command			
6) Display data write	0	1	0	1	1	1	0	0	0	1	1			Command for non-operation		
7) Display data read	0	1	0	1	1	1	1	*	*	*	*			Command for IC test. Do not use this command		

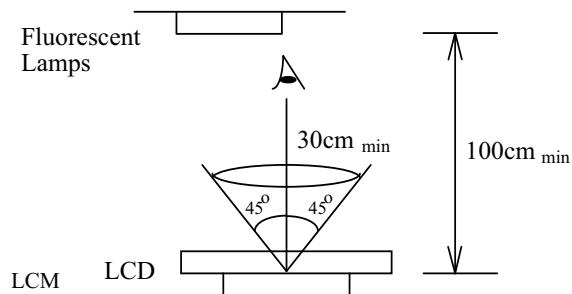
11. QUALITY SPECIFICATIONS

11.1 Standard of the product appearance test


Manner of appearance test: The inspection should be performed in using 20W x 2 fluorescent lamps.

Distance between LCM and fluorescent lamps should be 100 cm or more. Distance between LCM and inspector eyes should be 30 cm or more.

Viewing direction for inspection is 45° from vertical against LCM.



Definition of zone:

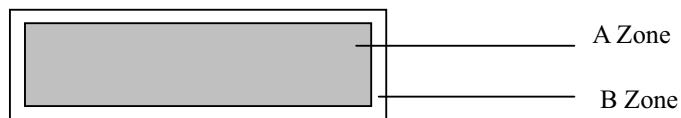

A Zone: Active display area (minimum viewing area).

B Zone: Non-active display area (outside viewing area).

11.2 Specification of quality assurance


AQL inspection standard






Sampling method: MIL-STD-105E, Level II, single sampling



Defect classification (**Note: * is not including**)




Classify	Item		Note	AQL
Major	Display state	Short or open circuit	1	0.65
		LC leakage		
		Flickering		
		No display		
		Wrong viewing direction		
		Contrast defect (dim, ghost)	2	
	Non-display	Back-light	1,8	
		Flat cable or pin reverse	10	
Minor	Display state	Wrong or missing component	11	1.0
		Background color deviation	2	
		Black spot and dust	3	
		Line defect, Scratch	4	
		Rainbow	5	
		Chip	6	
	Polarizer	Pin hole	7	
		Protruded	12	
	Soldering	Bubble and foreign material	3	
		Poor connection	9	
	Wire	Poor connection	10	
	TAB	Position, Bonding strength	13	

Note on defect classification

No.	Item	Criterion																		
1	Short or open circuit LC leakage Flickering No display Wrong viewing direction Wrong Back-light	Not allow																		
2	Contrast defect Background color deviation	Refer to approval sample																		
3	Point defect, Black spot, dust (including Polarizer) $\phi = (X+Y)/2$	 <table border="1"> <thead> <tr> <th>Point Size</th> <th>Acceptable Qty.</th> </tr> </thead> <tbody> <tr> <td>$\phi \leq 0.10$</td> <td>Disregard</td> </tr> <tr> <td>$0.10 < \phi \leq 0.20$</td> <td>3</td> </tr> <tr> <td>$0.20 < \phi \leq 0.25$</td> <td>2</td> </tr> <tr> <td>$0.25 < \phi \leq 0.30$</td> <td>1</td> </tr> <tr> <td>$\phi > 0.30$</td> <td>0</td> </tr> </tbody> </table> <p>Unit: mm</p>	Point Size	Acceptable Qty.	$\phi \leq 0.10$	Disregard	$0.10 < \phi \leq 0.20$	3	$0.20 < \phi \leq 0.25$	2	$0.25 < \phi \leq 0.30$	1	$\phi > 0.30$	0						
Point Size	Acceptable Qty.																			
$\phi \leq 0.10$	Disregard																			
$0.10 < \phi \leq 0.20$	3																			
$0.20 < \phi \leq 0.25$	2																			
$0.25 < \phi \leq 0.30$	1																			
$\phi > 0.30$	0																			
4	Line defect, Scratch	 <table border="1"> <thead> <tr> <th>Line</th> <th>Acceptable Qty.</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>W</td> </tr> <tr> <td>---</td> <td>$0.015 \geq W$</td> <td>Disregard</td> </tr> <tr> <td>$3.0 \geq L$</td> <td>$0.03 \geq W$</td> <td rowspan="2">2</td> </tr> <tr> <td>$2.0 \geq L$</td> <td>$0.05 \geq W$</td> </tr> <tr> <td>$1.0 \geq L$</td> <td>$0.1 > W$</td> <td>1</td> </tr> <tr> <td>---</td> <td>$0.05 < W$</td> <td>Applied as point defect</td> </tr> </tbody> </table> <p>Unit: mm</p>	Line	Acceptable Qty.	L	W	---	$0.015 \geq W$	Disregard	$3.0 \geq L$	$0.03 \geq W$	2	$2.0 \geq L$	$0.05 \geq W$	$1.0 \geq L$	$0.1 > W$	1	---	$0.05 < W$	Applied as point defect
Line	Acceptable Qty.																			
L	W																			
---	$0.015 \geq W$	Disregard																		
$3.0 \geq L$	$0.03 \geq W$	2																		
$2.0 \geq L$	$0.05 \geq W$																			
$1.0 \geq L$	$0.1 > W$	1																		
---	$0.05 < W$	Applied as point defect																		
5	Rainbow	Not more than two color changes across the viewing area.																		

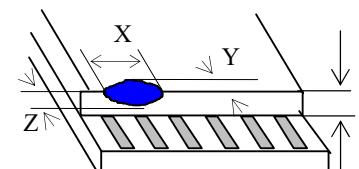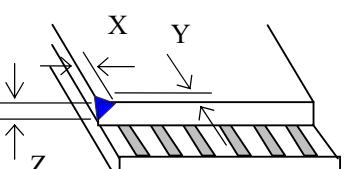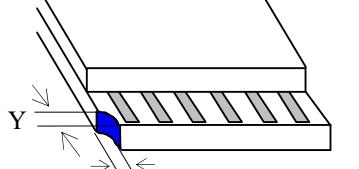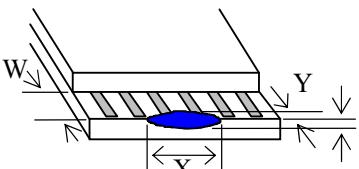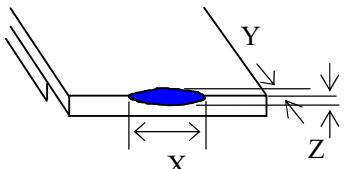No	Item	Criterion																																	
6	Chip	<p>Remark: X: Length direction Y: Short direction Z: Thickness direction t: Glass thickness W: Terminal Width</p> <p></p> <p>Acceptable criterion</p> <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤ 2</td> <td>0.5mm</td> <td>$\leq t/2$</td> </tr> </table> <p></p> <p>Acceptable criterion</p> <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤ 2</td> <td>0.5mm</td> <td>$\leq t$</td> </tr> </table> <p></p> <p>Acceptable criterion</p> <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤ 3</td> <td>≤ 2</td> <td>$\leq t$</td> </tr> <tr> <td colspan="3">shall not reach to ITO</td> </tr> </table> <p></p> <p>Acceptable criterion</p> <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>Disregard</td> <td>≤ 0.2</td> <td>$\leq t$</td> </tr> </table> <p></p> <p>Acceptable criterion</p> <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤ 5</td> <td>≤ 2</td> <td>$\leq t/3$</td> </tr> </table>	X	Y	Z	≤ 2	0.5mm	$\leq t/2$	X	Y	Z	≤ 2	0.5mm	$\leq t$	X	Y	Z	≤ 3	≤ 2	$\leq t$	shall not reach to ITO			X	Y	Z	Disregard	≤ 0.2	$\leq t$	X	Y	Z	≤ 5	≤ 2	$\leq t/3$
X	Y	Z																																	
≤ 2	0.5mm	$\leq t/2$																																	
X	Y	Z																																	
≤ 2	0.5mm	$\leq t$																																	
X	Y	Z																																	
≤ 3	≤ 2	$\leq t$																																	
shall not reach to ITO																																			
X	Y	Z																																	
Disregard	≤ 0.2	$\leq t$																																	
X	Y	Z																																	
≤ 5	≤ 2	$\leq t/3$																																	

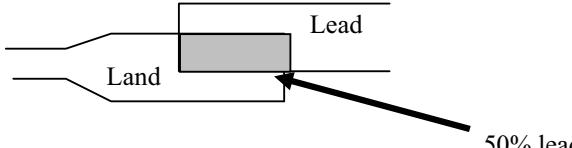No.	Item	Criterion								
7	Segment pattern W = Segment width $\phi = (X+Y)/2$	<p>(1) Pin hole $\phi < 0.10\text{mm}$ is acceptable.</p>  <table border="1" data-bbox="864 432 1297 601"> <thead> <tr> <th>Point Size</th><th>Acceptable Qty</th></tr> </thead> <tbody> <tr> <td>$\phi \leq 1/4W$</td><td>Disregard</td></tr> <tr> <td>$1/4W < \phi \leq 1/2W$</td><td>1</td></tr> <tr> <td>$\phi > 1/2W$</td><td>0</td></tr> </tbody> </table> <p>Unit: mm</p>	Point Size	Acceptable Qty	$\phi \leq 1/4W$	Disregard	$1/4W < \phi \leq 1/2W$	1	$\phi > 1/2W$	0
Point Size	Acceptable Qty									
$\phi \leq 1/4W$	Disregard									
$1/4W < \phi \leq 1/2W$	1									
$\phi > 1/2W$	0									
8	Back-light	<p>(1) The color of backlight should correspond its specification. (2) Not allow flickering</p>								
9	Soldering	<p>(1) Not allow heavy dirty and solder ball on PCB. (The size of dirty refer to point and dust defect) (2) Over 50% of lead should be soldered on Land.</p> 								
10	Wire	<p>(1) Copper wire should not be rusted (2) Not allow crack on copper wire connection. (3) Not allow reversing the position of the flat cable. (4) Not allow exposed copper wire inside the flat cable.</p>								
11*	PCB	<p>(1) Not allow screw rust or damage. (2) Not allow missing or wrong putting of component.</p>								

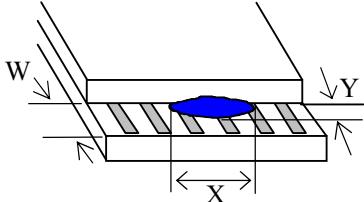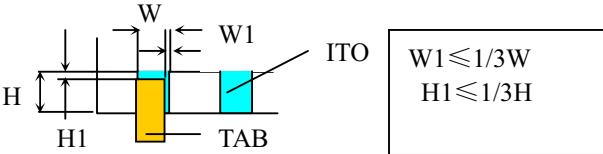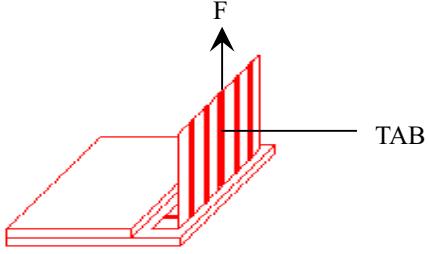No	Item	Criterion
12	Protruded W: Terminal Width	 <p>Acceptable criteria: $Y \leq 0.4$</p>
13	TAB	<p>1. Position</p>  <div style="border: 1px solid black; padding: 5px; display: inline-block;"> $W1 \leq 1/3W$ $H1 \leq 1/3H$ </div> <p>2 TAB bonding strength test</p>  <p>$P (=F/TAB bonding width) \geq 650\text{gf/cm}$, (speed rate: 1mm/min) 5pcs per SOA (shipment)</p>
14	Total no. of acceptable Defect	<p>A. Zone</p> <p>Maximum 2 minor non-conformities per one unit.</p> <p>Defect distance: each point to be separated over 10mm</p> <p>B. Zone</p> <p>It is acceptable when it is no trouble for quality and assembly in customer's end product.</p>

11.3 Reliability of LCM

Reliability test condition:

Item	Condition	Time (hrs)	Assessment
High temp. Storage	80°C	48	No abnormalities in functions and appearance
High temp. Operating	70°C	48	
Low temp. Storage	-30°C	48	
Low temp. Operating	-20°C	48	
Humidity	40°C/ 90%RH	48	
Temp. Cycle	0°C ← 25°C → 50°C (30 min ← 5 min → 30min)	10cycles	

Recovery time should be 24 hours minimum. Moreover, functions, performance and appearance shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature (20 \pm 8°C), normal humidity (below 65% RH), and in the area not exposed to direct sun light.

11.4 Precaution for using LCD/LCM

LCD/LCM is assembled and adjusted with a high degree of precision. Do not attempt to make any alteration or modification. The followings should be noted.

General Precautions:

1. LCD panel is made of glass. Avoid excessive mechanical shock or applying strong pressure onto the surface of display area.
2. The polarizer used on the display surface is easily scratched and damaged. Extreme care should be taken when handling. To clean dust or dirt off the display surface, wipe gently with cotton, or other soft material soaked with isopropyl alcohol, ethyl alcohol or trichlorotrifloroethane, do not use water, ketone or aromatics and never scrub hard.
3. Do not tamper in any way with the tabs on the metal frame.
4. Do not make any modification on the PCB without consulting NEWHAVEN
5. When mounting a LCM, make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.
6. Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels and also cause rainbow on the display.
7. Be careful not to touch or swallow liquid crystal that might leak from a damaged cell. Any liquid crystal adheres to skin or clothing, wash it off immediately with soap and water.

Static Electricity Precautions:

1. CMOS-LSI is used for the module circuit; therefore operators should be grounded whenever he/she comes into contact with the module.
2. Do not touch any of the conductive parts such as the LSI pads; the copper leads on the PCB and

the interface terminals with any parts of the human body.

3. Do not touch the connection terminals of the display with bare hand; it will cause disconnection or defective insulation of terminals.
4. The modules should be kept in anti-static bags or other containers resistant to static for storage.
5. Only properly grounded soldering irons should be used.
6. If an electric screwdriver is used, it should be grounded and shielded to prevent sparks.
7. The normal static prevention measures should be observed for work clothes and working benches.
8. Since dry air is inductive to static, a relative humidity of 50-60% is recommended.

Soldering Precautions:

1. Soldering should be performed only on the I/O terminals.
2. Use soldering irons with proper grounding and no leakage.
3. Soldering temperature: $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
4. Soldering time: 3 to 4 second.
5. Use eutectic solder with resin flux filling.
6. If flux is used, the LCD surface should be protected to avoid spattering flux.
7. Flux residue should be removed.

Operation Precautions:

1. The viewing angle can be adjusted by varying the LCD driving voltage V_o .
2. Since applied DC voltage causes electro-chemical reactions, which deteriorate the display, the applied pulse waveform should be a symmetric waveform such that no DC component remains. Be sure to use the specified operating voltage.
3. Driving voltage should be kept within specified range; excess voltage will shorten display life.
4. Response time increases with decrease in temperature.
5. Display color may be affected at temperatures above its operational range.
6. Keep the temperature within the specified range usage and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel-off or generate bubbles.
7. For long-term storage over 40°C is required, the relative humidity should be kept below 60%, and avoid direct sunlight.

Limited Warranty

LONGTECH LCDs and modules are not consumer products, but may be incorporated by NEWHAVEN's customers into consumer products or components thereof, NEWHAVEN does not warrant that its LCDs and components are fit for any such particular purpose.

1. The liability of NEWHAVEN is limited to repair or replacement on the terms set forth below. NEWHAVEN will not be responsible for any subsequent or consequential events or injury or damage to any personnel or user including third party personnel and/or user. Unless otherwise agreed in writing between NEWHAVEN and the customer, NEWHAVEN will only replace or repair any of its LCD which is found defective electrically or visually when inspected in accordance with NEWHAVEN general LCD inspection standard. (Copies available on request)
2. No warranty can be granted if any of the precautions state in handling liquid crystal display above has been disregarded. Broken glass, scratches on polarizer mechanical damages as well as defects that are caused accelerated environment tests are excluded from warranty.
3. In returning the LCD/LCM, they must be properly packaged; there should be detailed description of the failures or defect.