

M306S0T-PRB

Signal Converter Board for M16C/6S Group M16C/6S0

User's Manual

Keep safety first in your circuit designs!

- Renesas Technology Corporation and Renesas Solutions Corporation put the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Renesas Technology product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation, Renesas Solutions Corporation or a third party.
- Renesas Technology Corporation and Renesas Solutions Corporation assume no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation and Renesas Solutions Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation, Renesas Solutions Corporation or an authorized Renesas Technology product distributor for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Renesas Technology Corporation and Renesas Solutions Corporation assume no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Renesas Technology Corporation and Renesas Solutions Corporation by various means, including the Renesas home page (<http://www.renesas.com>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation and Renesas Solutions Corporation assume no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Renesas Technology semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation, Renesas Solutions Corporation or an authorized Renesas Technology product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Renesas Technology Corporation and Renesas Solutions Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Renesas Technology Corporation or Renesas Solutions Corporation for further details on these materials or the products contained therein.

Precautions to be taken when using this product

- This product is a development supporting unit for use in your program development and evaluation stages. In mass-producing your program you have finished developing, be sure to make a judgment on your own risk that it can be put to practical use by performing integration test, evaluation, or some experiment else.
- In no event shall Renesas Solutions Corporation be liable for any consequence arising from the use of this product.
- Renesas Solutions Corporation strives to renovate or provide a workaround for product malfunction at some charge or without charge. However, this does not necessarily mean that Renesas Solutions Corporation guarantees the renovation or the provision under any circumstances.
- This product has been developed by assuming its use for program development and evaluation in laboratories. Therefore, it does not fall under the application of Electrical Appliance and Material Safety Law and protection against electromagnetic interference when used in Japan.

HQPACK, NQPACK, TQPACK, YQPACK, YQSOCKET and YQ-Guide are products of Tokyo Eletech Corporation.



CAUTION

If the requirements shown in the "CAUTION" sentences are ignored, the equipment may cause personal injury or damage to the products.

Renesas Tools Homepage <http://www.renesas.com/en/tools>

1. Outline

The M306S0T-PRB is a signal converter board for the M16C/6S Group M16C/6S0 for connecting an emulator for the M16C/62P Group.

2. Package Components (See Figure 2.1)

- (1) M306S0T-PRB..... 1 pc.
- (2) YQPACK064SD 1 pc.
- (3) NQPACK064SD-ND 1 pc.
- (4) YQ-GUIDE 4 pcs.
- (5) M306S0T-PRB User's Manual (This manual)..... 1 pc.
- (6) M306S0T-PRB User's Manual (Japanese) 1 pc.

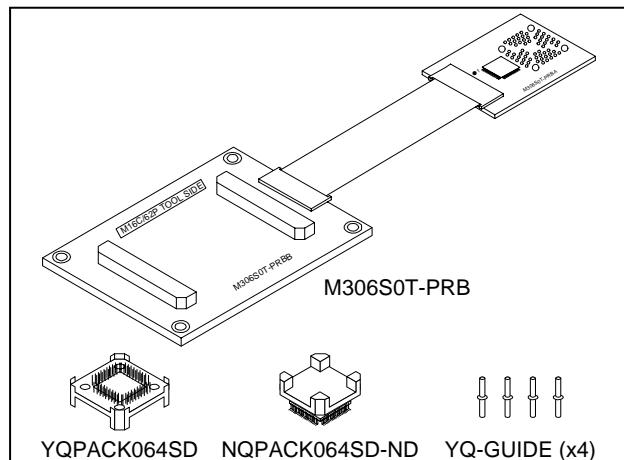


Figure 2.1 Package components

3. Specifications

Table 1 Specifications

| | |
|-------------------------------------------|--------------------------------------------|
| Applicable MCU | M16C/6S Group M16C/6S0 |
| Applicable package | 64P6Q-A (64-pin 0.5-mm-pitch QFP) |
| Max. operating frequency | 15.36 MHz |
| Operating voltage | 3.0 to 3.6 V |
| Power supply | Supplied from Vcc pin of the target system |
| Insertion/removal iterations of connector | 50 times guaranteed |

4. Usage (See Figure 4.1)

The M306S0T-PRB can be used for debugging and board mounted evaluation in common by mounting the NQPACK064SD-ND on the target system.

- (1) For debugging
Mount the NQPACK064SD-ND and YQPACK064SD on the foot pattern of the target system in that order. Then fix them with the YQ-GUIDE's (do not use the screw in the YQPACK064SD package). After connecting the M306S0T-PRB to the YQPACK064SD, connect the emulator and the M306S0T-PRB.
- (2) For onboard evaluation
Mount the M16C/6S Group M16C/6S0 MCU and the HQPACK064SD (separately available) in that order on the NQPACK064SD-ND on the target system and fix them with screws.

Before using the M306S0T-PRB, be sure to read "7. Precautions" on page 3 and the user's manual of the emulator for the M16C/62P Group.

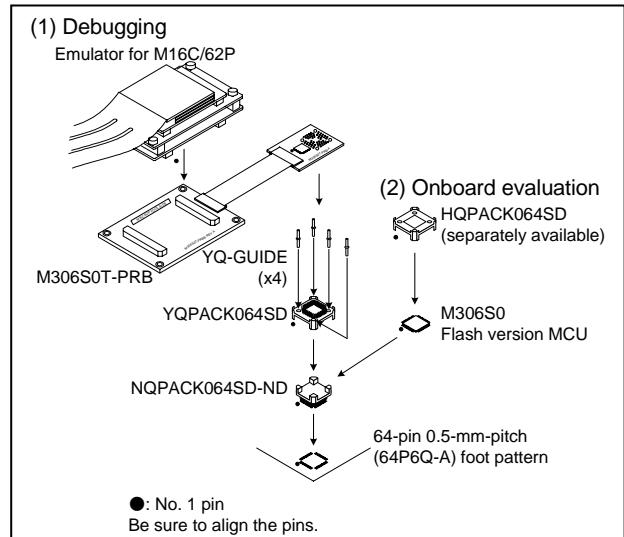


Figure 4.1 Usage

5. Connection Procedure (See Figure 5.1)

- (1) Mount the NQPACK064SD-ND on the target board.
- (2) Attach the YQPACK064SD on the NQPACK064SD-ND.
- (3) Secure the four corners of the YQPACK064SD with the YQ-GUIDE's.

- **Do not use the screws included with the YQPACK064SD for fixing the YQPACK064SD.**
- **The screwdriver included with the NQPACK064SD-ND is used for fixing the HQPACK064SD. Do not use it for fixing the YQ-GUIDE's.**

- (4) Attach the M306S0T-PRB on the YQPACK064SD.
- (5) Connect the M306S0T-PRB to the emulator for the M16C/62P Group.

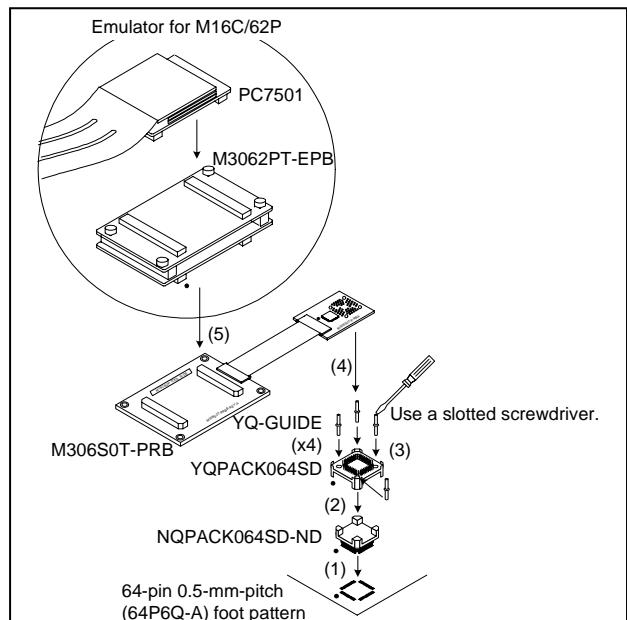


Figure 5.1 Connection procedure

6. External Dimensions and a Sample Foot Pattern (See Figure 6.1)

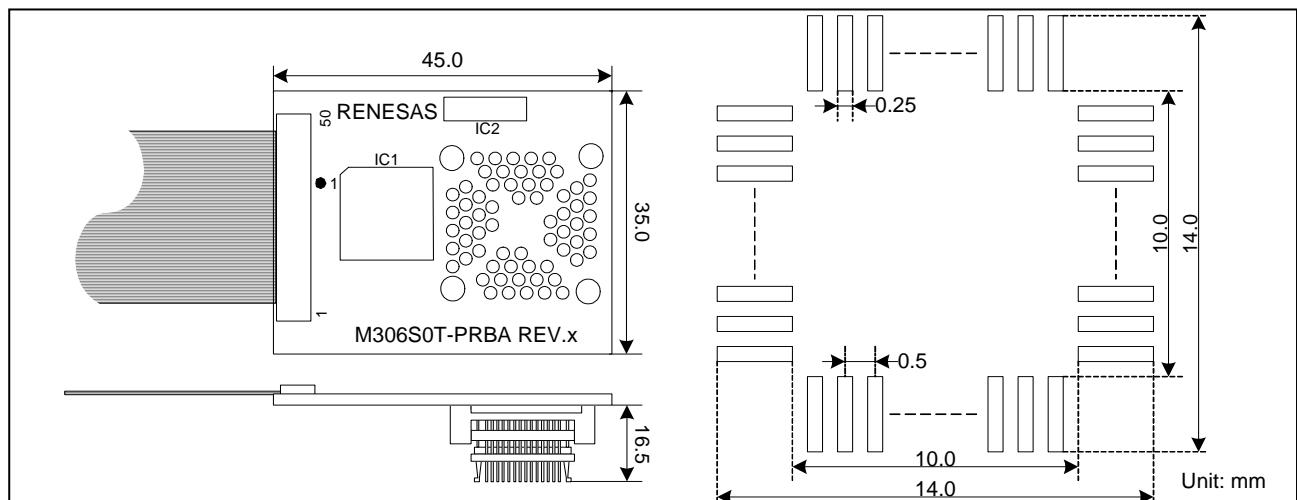


Figure 6.1 External dimensions and a sample foot pattern

7. Precautions

⚠ CAUTION

Caution to Be Taken for This Product:



- When connecting the YQPACK064SD, be sure to use the included YQ-GUIDE's. Do not use the screws included with the YQPACK064SD to fix it.

IMPORTANT

Notes on This Product:

- We cannot accept any request for repair.
- For purchasing the NQPACK064SD-ND, YQPACK064SD and HQPACK064SD, contact the following:
 - Daimaru Kogyo Ltd. <http://www.daimarukogyo.co.jp/>
 - Tokyo Eletech Corporation http://www.tetc.co.jp/e_tet.htm
- For inquiries about the product or the contents of this user's manual, contact your local distributor.
 - Renesas Tools Homepage <http://www.renesas.com/en/tools>

Note on Power Supply to the MCU:

- The M16C/6S MCU mounted on this product operates by the Vcc power supply of the target system. Therefore, design your system so that the Vcc pin is powered by the target system.

Note on Clock Supply to the MCU:

- The clock supplied to the MCU is selectable in the Emulator tab of the Init dialog box of the emulator debugger. Be sure to select "External" for this product.

Note on Debugging Flash ROM Rewrite Program:

- This product cannot be used for debugging the flash ROM rewrite program.

8. Connection Diagram

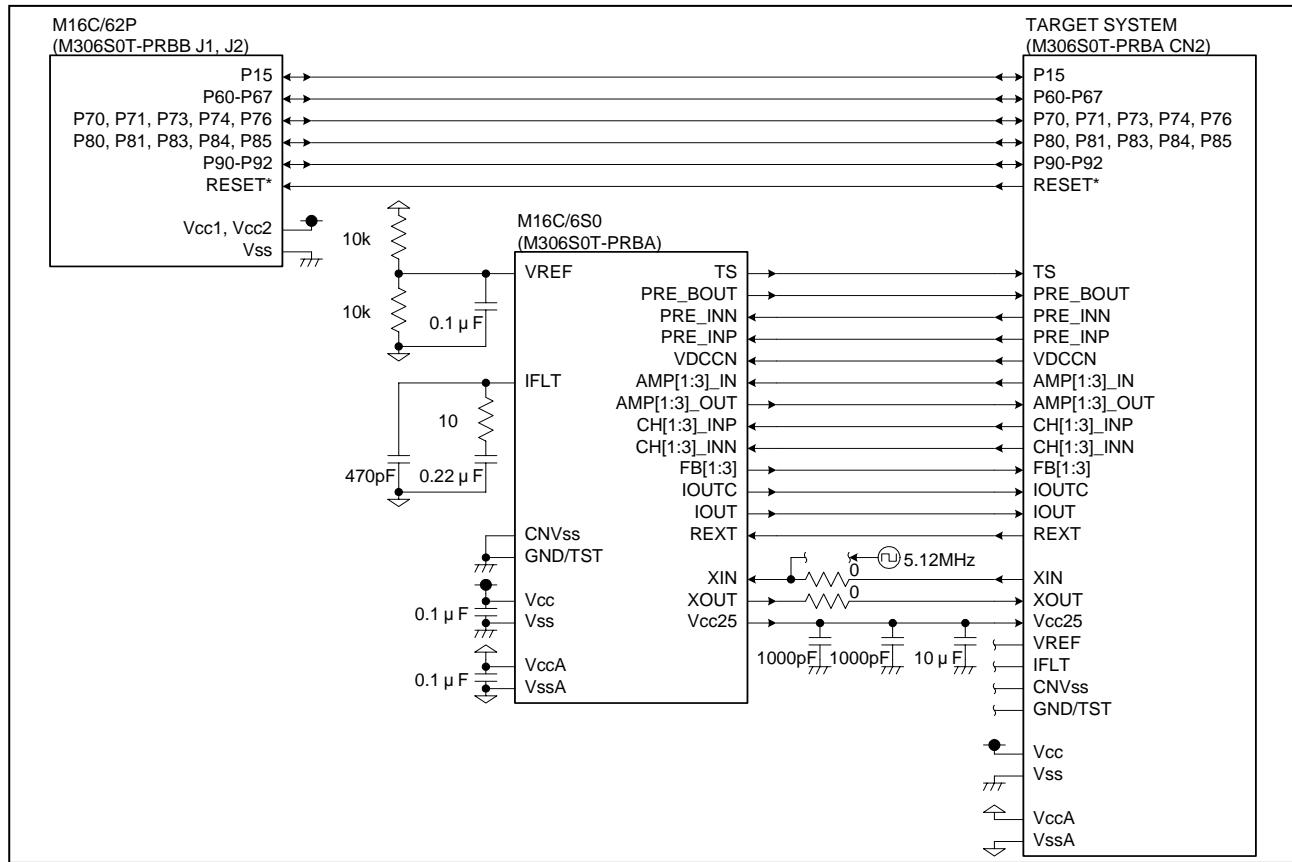


Figure 8.1 Connection diagram