


## Features

- Designed as Bypass Diodes for Solar Panels
- Selectively Rated for 200°C Maximum Junction Temperature for High Thermal Reliability
- Patented Super Barrier Rectifier Technology
- High Forward Surge Capability
- Ultra Low Forward Voltage Drop
- Excellent High Temperature Stability
- Lead Free Finish, RoHS Compliant (Note 2)**

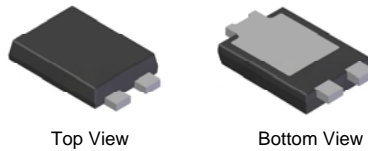

## Mechanical Data

- Case: PowerDI<sup>®</sup>5
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Finish – Matte Tin annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208 ③
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.093 grams (approximate)

LEFT PIN ○  
RIGHT PIN ○

BOTTOMSIDE  
HEAT SINK

Note: Pins Left & Right must be electrically connected at the printed circuit board.

## Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitance load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	45	V
Working Peak Reverse Voltage	V <sub>RWM</sub>		
DC Blocking Voltage	V <sub>RM</sub>		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	32	V
Average Rectified Output Current	I <sub>O</sub>	10	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I <sub>FSM</sub>	275	A

## Thermal Characteristics

Characteristic	Symbol	Value	Unit
Maximum Thermal Resistance			
Thermal Resistance Junction to Ambient (Note 3)	R <sub>θJA</sub>	73	°C/W
Thermal Resistance Junction to Ambient (Note 4)	R <sub>θJA</sub>	31	
Operating Temperature Range	V <sub>R</sub> ≤ 80% V <sub>RRM</sub>	-65 to +150	°C
	V <sub>R</sub> ≤ 50% V <sub>RRM</sub>	≤180	
	DC Forward Mode	≤200	
Storage Temperature Range	T <sub>STG</sub>	-65 to +175	°C

## Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	V <sub>(BR)R</sub>	45	-	-	V	I <sub>R</sub> = 0.3mA
Forward Voltage Drop	V <sub>F</sub>	-	-	0.42	V	I <sub>F</sub> = 8A, T <sub>J</sub> = 25°C
		-	0.42	0.47		I <sub>F</sub> = 10A, T <sub>J</sub> = 25°C
		-	0.38	0.41		I <sub>F</sub> = 10A, T <sub>J</sub> = 125°C
Leakage Current (Note 1)	I <sub>R</sub>	-	0.05	0.3	mA	V <sub>R</sub> = 45V, T <sub>J</sub> = 25°C
		-	-	15		V <sub>R</sub> = 45V, T <sub>J</sub> = 100°C
		-	28.0	75		V <sub>R</sub> = 45V, T <sub>J</sub> = 150°C

- Notes:
- Short duration pulse test used to minimize self-heating effect.
  - EU Directive 2002/95/EC (RoHS). All applicable RoHS exemptions applied, see *EU Directive 2002/95/EC Annex Notes*.
  - FR-4 PCB, 2oz. Copper, minimum recommended pad layout per <http://www.diodes.com/datasheets/ap02001.pdf>.
  - Polymide PCB, 2oz. Copper. Cathode pad dimensions 18.8mm x 14.4mm. Anode pad dimensions 5.6mm x 14.4mm.

SBR and PowerDI are registered trademarks of Diodes Incorporated.

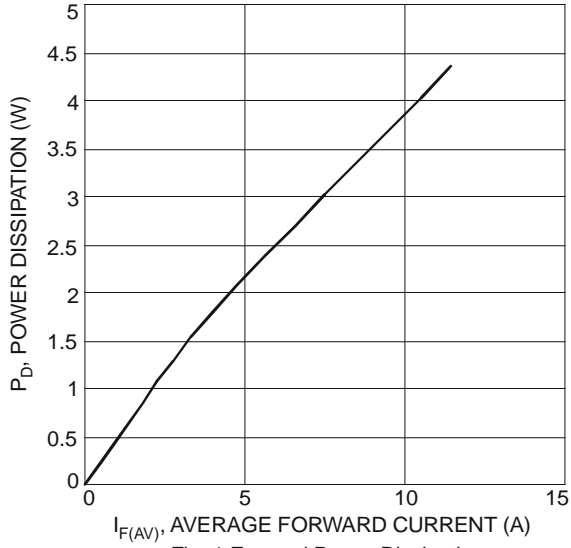


Fig. 1 Forward Power Dissipation

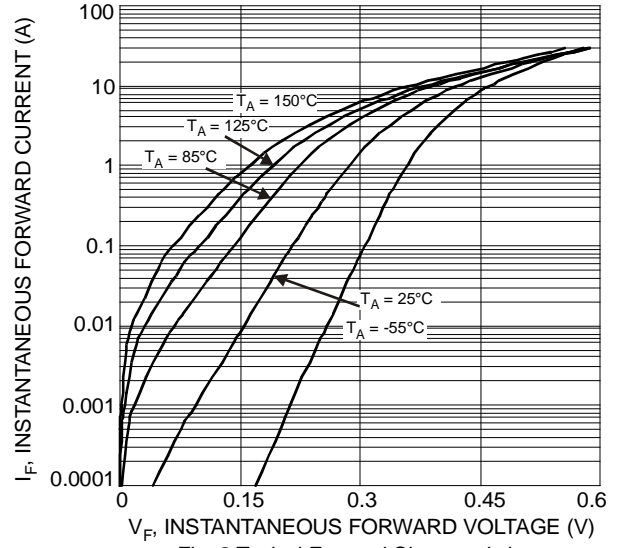


Fig. 2 Typical Forward Characteristics

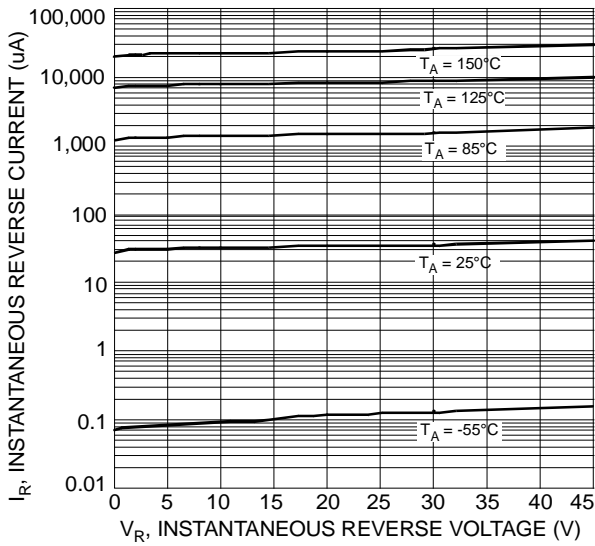


Fig. 3 Typical Reverse Characteristics

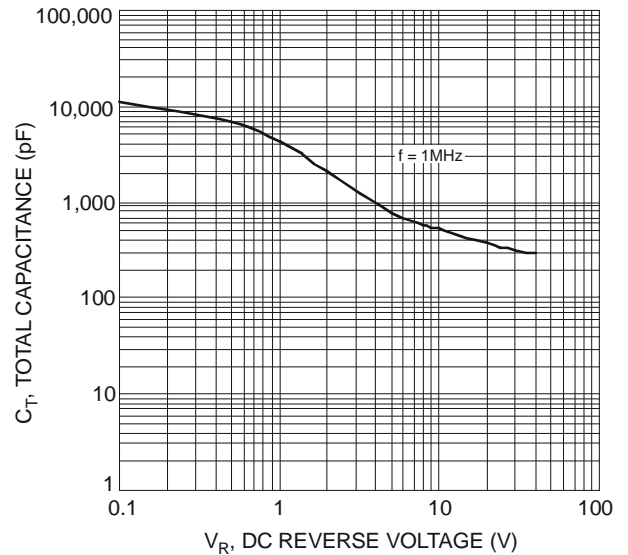


Fig. 4 Total Capacitance vs. Reverse Voltage

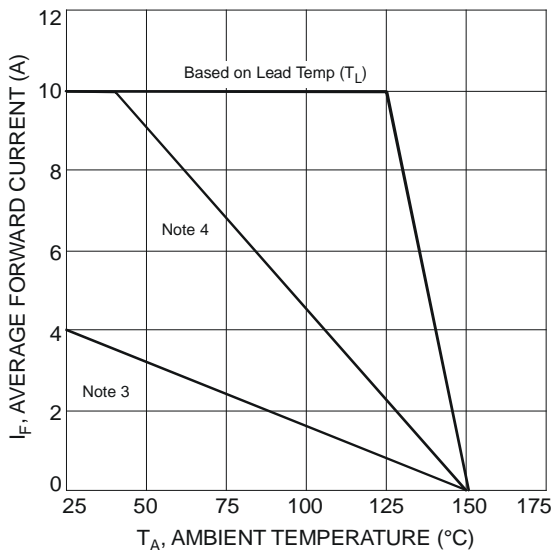



Fig. 5 Forward Current Derating Curve

## Ordering Information (Note 5)

Part Number	Case	Packaging
SBR10U45SP5-13	PowerDI®5	5000/Tape & Reel


Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information




S10U45S = Product Type Marking Code  
 Diodes logo = Manufacturers' Code Marking  
 K = Factory Designator  
 YYWW = Date Code Marking  
 YY = Last Two Digits of Year (ex: 08 for 2008)  
 WW = Week code 01 to 52

## Package Outline Dimensions

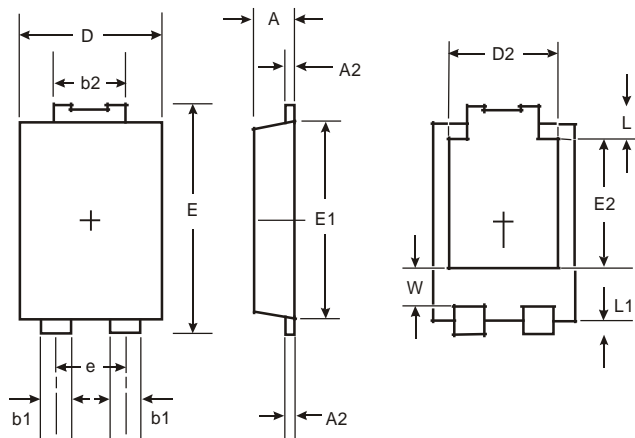

PowerDI®5		
Dim	Min	Max
A	1.05	1.15
A2	0.33	0.43
b1	0.80	0.99
b2	1.70	1.88
D	3.90	4.05
D2	3.054 Typ	
E	6.40	6.60
e	1.84 Typ	
E1	5.30	5.45
E2	3.549 Typ	
L	0.75	0.95
L1	0.50	0.65
W	1.10	1.41
All Dimensions in mm		

## Suggested Pad Layout

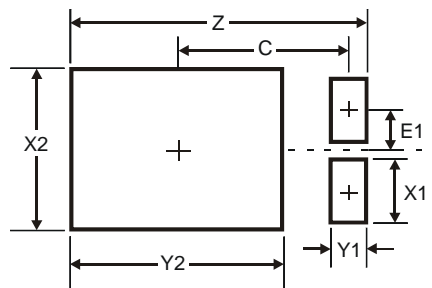

Dimensions	Value (in mm)
Z	6.6
X1	1.4
X2	3.6
Y1	0.8
Y2	4.7
C	3.87
E1	0.9

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.