# MALIORY Mallory Sonalert Products Inc. Sales Outline Drawing Part # SC628AN Revision C


## **Specifications:**

Sound level Category	Loud Sound Level
Mode of Operation	Continuous
Mounting	Panel (see note B)
Voltage Rating	6 to 28 Vac/dc
Frequency	2900 Hz ±500 Hz
Loudness (Min. Voltage)	80 dB(A) min. @ 2 FT and 6 VAC/DC
Loudness (Max Voltage)	95 dB(A) min. @ 2FT and 28 VAC/DC
Current Draw	4 mA Max @ 6 VAC/DC
Current Draw	30 mA Max @ 28 VAC/DC
Storage Temperature	-40°C to +85°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	2.1 oz (59 g)
Housing	6/6 Nylon, Color Black
Options	For other options contact factory

## **Dimensions:** Inches (mm)


# UL Recognized • \*\*

### PART DIMENSIONS BEFORE CODE DATE 0824 5

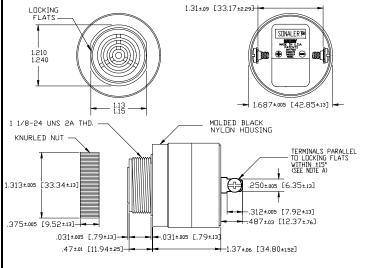

NOTE A: TERMINALS-.032 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUDED. WILL ACCEPT 1/4' QUICK CONNECT. NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25' HOLE PUNCHED IN PANEL, IF DRIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.

### PART DIMENSIONS AFTER CODE DATE 0825 1



NOTE A: TERMINALS-032 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUDED. WILL ACCEPT 1/4' QUICK CUNNECT. NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25' HOLE PUNCHED IN PANEL, IF DRIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAVING, SCREW NUT BACK ON. DO NOT OVERTIGHTEN.