

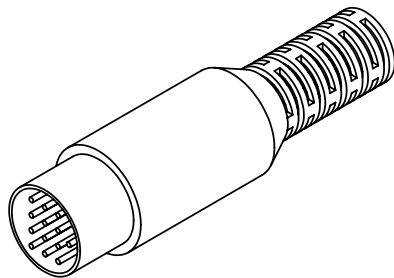



REV.	DESCRIPTION	DATE
A	NEW DRAWING	2/24/2006

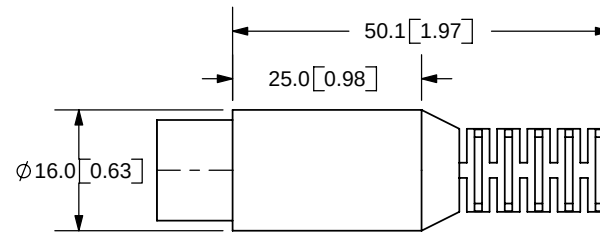

TOLERANCE:
X.X ±0.1mm
X.XX ±0.05mm

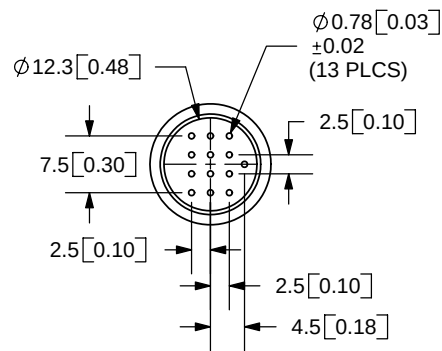

SPECIFICATIONS:
 RATING: 100V DC @ 1A
 CONTACT RESISTANCE: Pins-30m OHMS MAX; Shell-50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 1000A AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES



CUI INC

9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

	MATERIAL	PLATING	TITLE: IN-LINE PLUG		REV: A
PINS	Brass	Silver	PART NO. SD-130		UNITS: MM [INCHES]
SHELL	Steel	Nickel			
INSULATOR	PBT		DRAWN BY: ZRJ		SCALE: 1:1
BOOT	PVC				
			APPROVED BY:		

PC FILE NAME:
SD-130

COPYRIGHT 2006 BY CUI INC.