
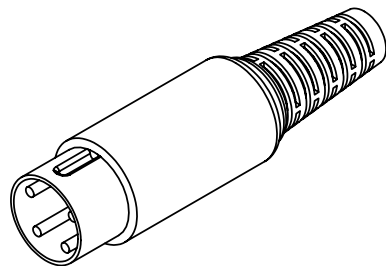


REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/6/2006

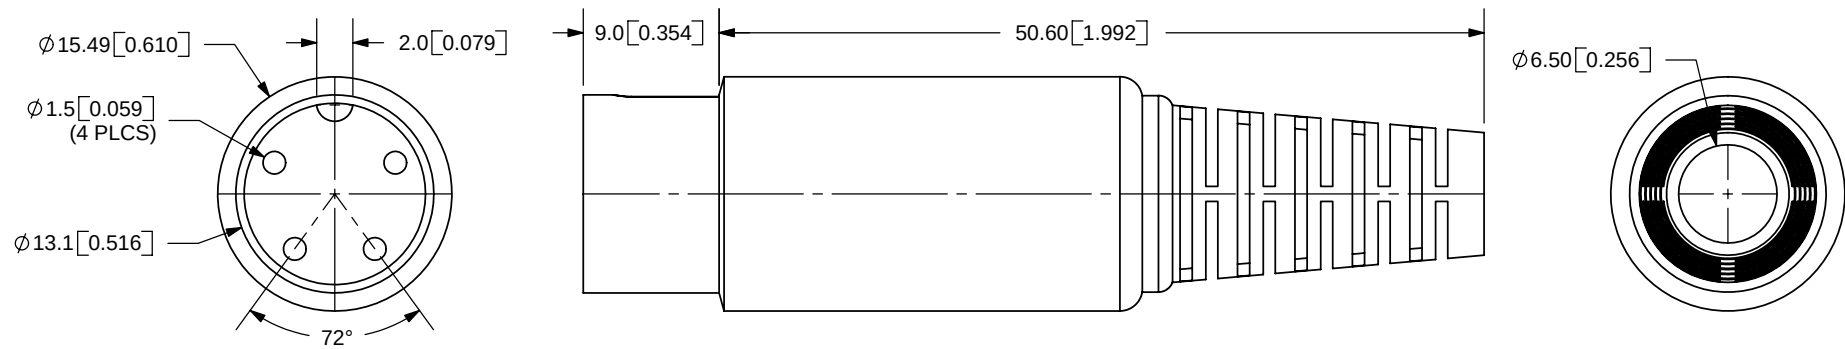

SCALE 1:1

NOTES:
 RECOMMENDED WIRE RANGE: 24AWG~28AWG
 LEAD TERMINATION: SOLDER CUPS

SPECIFICATIONS:
 RATING: 100V AC @ 1A
 CONTACT RESISTANCE: PINS-30m OHMS MAX; SHELL-50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

TOLERANCE:
 X.X ± 0.1 mm
 X.XX ± 0.05 mm



9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

	MATERIAL	PLATING	TITLE: IN-LINE PLUG	REV: A
PINS	Brass	Nickel	PART NO. SD-40	UNITS: MM [INCHES]
SHELL	Steel	Nickel		
INSULATOR	PBT		DRAWN BY: ZRJ	APPROVED BY:
BOOT	PVC			SCALE: 2:1

PC FILE NAME:
 SD-40

COPYRIGHT 2006 BY CUI INC.