
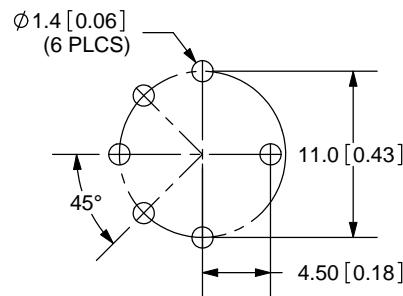
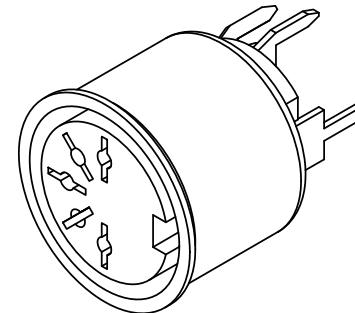
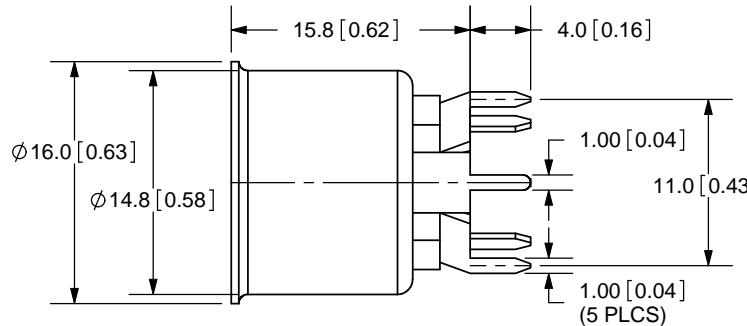


REV.	DESCRIPTION	DATE
A	NEW DRAWING	12/5/2005
B	rating update	8/28/2008

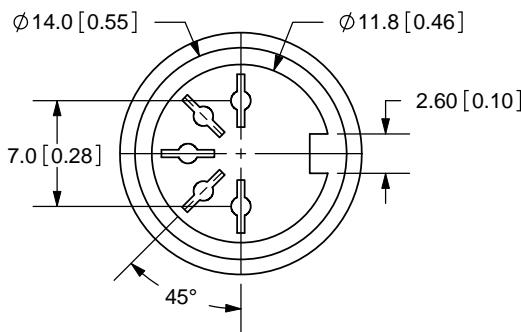

PCB LAYOUT
FRONT VIEW

SPECIFICATIONS:

RATING: 24V DC @ 1A PER PIN
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

TOLERANCE:
X. ± 0.5
X.X ± 0.3 mm
X.XX ± 0.15 mm



20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

ITEM	MATERIAL	PLATING	TITLE: DIN RECEPTACLE, VERTICAL, PCB 5P		REV: B
			PART NO.	UNITS:	
CONTACTOR	Brass	Silver	SD-50BV	MM [INCHES]	
SLEEVE	Phosphor Bronze	Silver			
COVER	Iron Sheet	Nickel			
MOUTH BUSHING	PBT-94V0 G15		DRAWN BY: ZRJ	APPROVED BY:	SCALE: 2:1

PC FILE NAME:
SD-50BV

COPYRIGHT 2008 BY CUI INC.