

## SDX010IND4

### 10"H<sub>2</sub>O Compensated Pressure Sensors in a DIP Package


#### Features

- Improved Stability
- Low Cost DIP
- Temperature Compensated
- Calibrated Zero and Span
- Small Size
- Low Noise

#### Applications

- Medical Equipment
- Computer Peripherals
- Pneumatic Controls
- HVAC

#### Equivalent Circuit

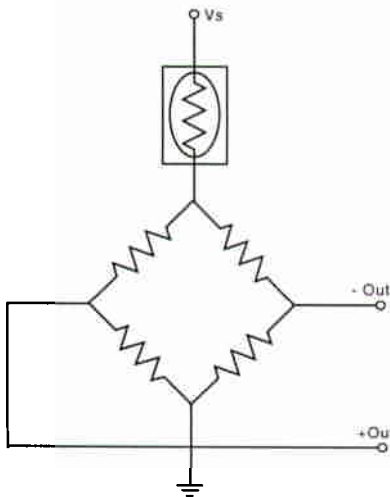

#### General Description

The SDX IN series sensors will provide a very cost effective solution for pressure applications that require small size plus performance. These calibrated and temperature compensated sensors give an accurate and stable output over a 0°C to 50°C temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like.

The SDX010IND4 devices are specifically designed to measure low pressures. They feature a 0 to 10 IN H<sub>2</sub>O full scale pressure range.

The output of the bridge is ratiometric to the supply voltage and operation from any D.C. supply voltage up to +20 V is acceptable.

The SDX devices feature an integrated circuit sensor element and laser trimmed thick film ceramic housed in a compact solvent resistant case. The package is a double wide (i.e., 0.600" lead spacing) dual-inline-package. This is the same familiar package used by IC manufacturers except has integral pressure port(s). The pc board area used by each DIP is approximately 0.26 square inches. This extremely small size enables the use of multiple sensors in limited available space. The DIP provides excellent corrosion resistance and isolation to external package stress.

The DIP mounts on a pc board like a standard IC with through-hole pins. The pins anchor the pressure sensor to the pc board and provide a more secure and stable unit than other types of packages.

**Pressure Sensor Characteristics (all devices)****Maximum Ratings**

|                                       |         |
|---------------------------------------|---------|
| Supply Voltage $V_S$                  | +20 Vdc |
| Maximum Pressure on any port          | 50 psig |
| Lead Temperature (soldering 2-4 sec.) | 250°C   |
| Burst Pressure                        | 7 psi   |

**Environmental Specifications**

|                    |                 |
|--------------------|-----------------|
| Temperature Ranges |                 |
| Compensated        | 0°C to +50°C    |
| Operating          | -20°C to +85°C  |
| Storage            | -40°C to +125°C |
| Humidity Limits    | 0 to 95% RH     |

**Standard Pressure Ranges**

| part number | operating pressure        | FULL SCALE SPAN <sup>(2)</sup> |         |         |
|-------------|---------------------------|--------------------------------|---------|---------|
|             |                           | minimum                        | typical | maximum |
| SDX010IND4  | 0 - 10 InH <sub>2</sub> O | 24.5 mV                        | 25.0 mV | 25.5 mV |

**Performance Characteristics <sup>(1)</sup>**


| Characteristic                                       | minimum | typical | maximum | units |
|--|---------|---------|---------|-------|
| Zero Pressure Offset                                 | -1.0    | 0       | +1.0    | mV    |
| Combined Non-Linearity & Hysteresis <sup>(3)</sup>   | --      | ±0.2    | ±1.0    | % FSS |
| Temp. Effect on Span (0-50°C) <sup>(4)</sup>         | --      | ±0.4    | ±2.0    | %FSS  |
| Temp. Effect on Offset (0-50°C) <sup>(4)</sup>       | --      | ±0.2    | ±0.6    | mV    |
| Repeatability <sup>(5)</sup>                         | --      | ±0.5    | --      | %FSS  |
| Input Resistance <sup>(6)</sup>                      | --      | 4.0     | --      | kΩ    |
| Output Resistance <sup>(7)</sup>                     | --      | 4.0     | --      | kΩ    |
| Common Mode Voltage <sup>(8)</sup>                   | 1.5     | 3.0     | 5.0     | Vdc   |
| Response Time <sup>(9)</sup>                         | --      | 100     | --      | μsec  |
| Long term Stability of Offset & Span <sup>(10)</sup> | --      | ±0.1    | --      | mV    |

**Specification Notes:**


- Note 1:** Reference Conditions (unless otherwise noted): supply voltage,  $V_S=12$  Vdc;  $T_A=25^\circ\text{C}$ ; common mode line pressure=0 psig; pressure applied to port 2.
- Note 2:** Full Scale Span (FSS) is the algebraic difference between the output voltage at full-scale pressure and the output at zero pressure. Span is ratiometric to the supply voltage.
- Note 3:** Pressure Hysteresis is the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure. Pressure Non-Linearity refers to the best fit straight line as measured for the offset, full scale and ½ full-scale pressure at 25°C.
- Note 4:** Maximum error band of the offset voltage and the error band of the span, relative to the 25°C reading.
- Note 5:** Maximum difference in output at any pressure within the operating pressure range and temperature within 0°C to +50°C after:  
a) 100 temperature cycles, 0°C to +50°C.  
b) 1.0 million pressure cycles, 0 psi to full scale span.
- Note 6:** Input Resistance is the resistance between  $V_S$  and ground.
- Note 7:** Output Resistance is the resistance between the + and - outputs.
- Note 8:** Common Mode Voltage as measured from output to ground for  $V_S=12$  Vdc.
- Note 9:** Response time for a 0 psi to full-scale span pressure step change, 10% to 90% rise time.
- Note 10:** Long term stability over a one year period.

Rev080100

## Electrical Connections

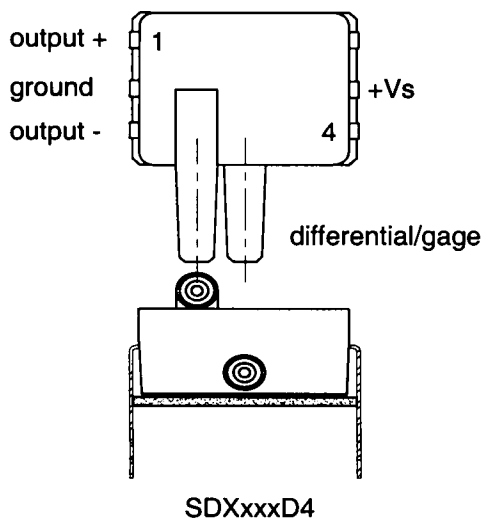

## Physical Dimensions

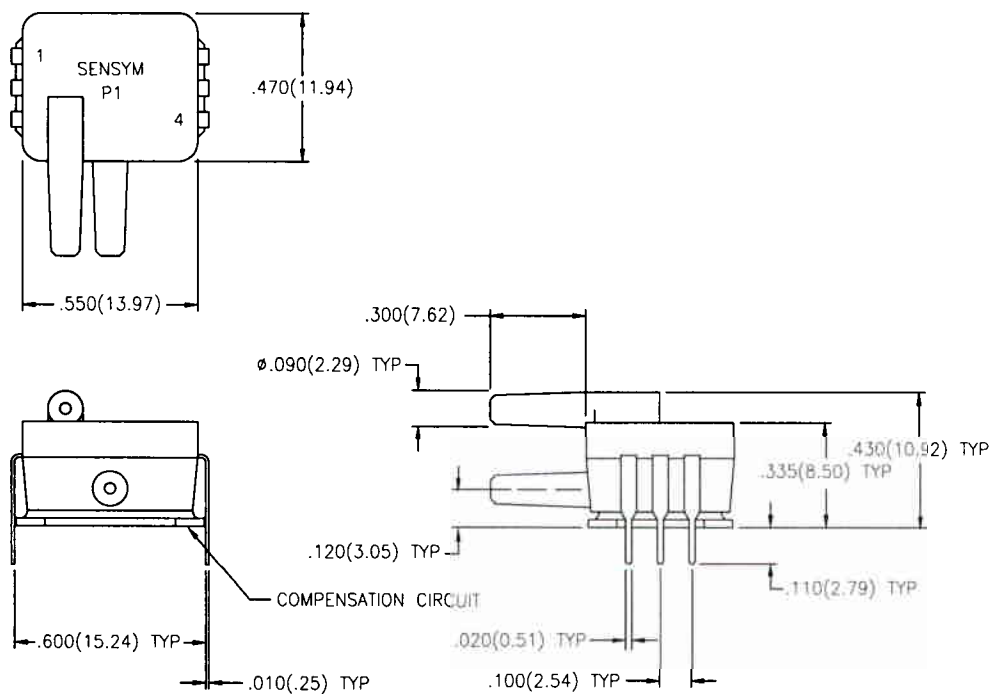

## Ordering Information

pressure range  
0 -10 InH2O

absolute  
--

gage  
--

differential/gage  
SDX010IND4

SenSym ICT reserves the right to make changes to any products herein. SenSym ICT does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

**SenSym ICT**  
1804 McCarthy Boulevard  
Milpitas, CA 95035

**Tel: (408) 954-6700**  
**Fax: (408) 954-9458**  
**Internet: [www.sensym-ict.com](http://www.sensym-ict.com)**