

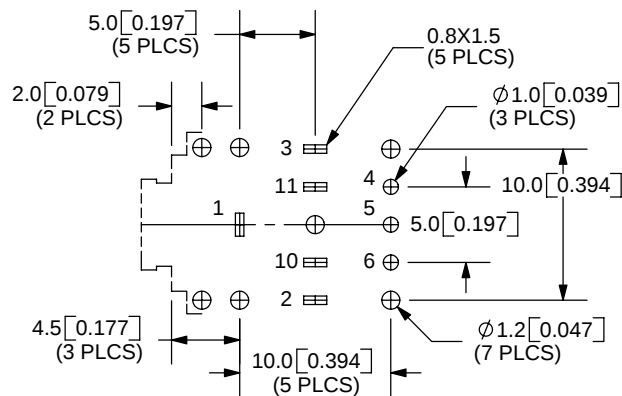
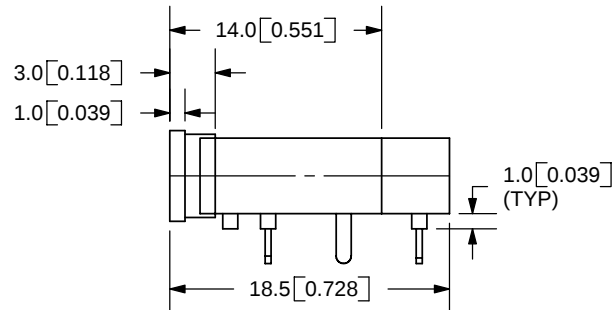
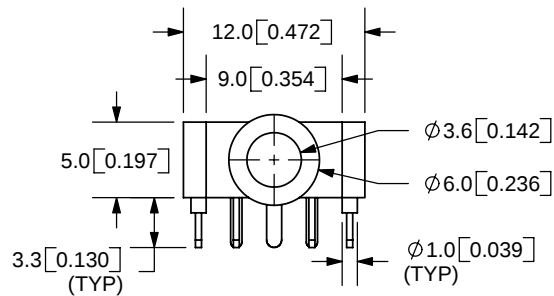



REV.	DESCRIPTION	DATE
A	NEW DRAWING	9/13/2006



PCB LAYOUT
TOP VIEW

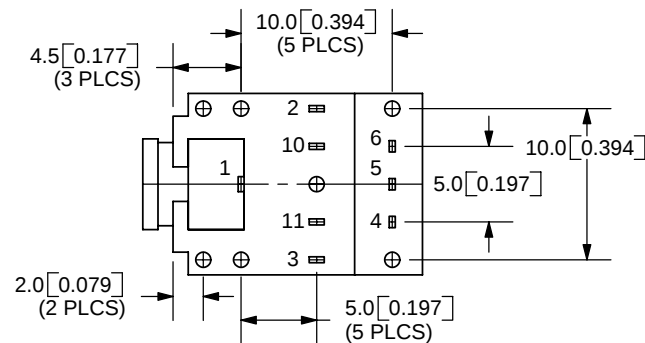

TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm

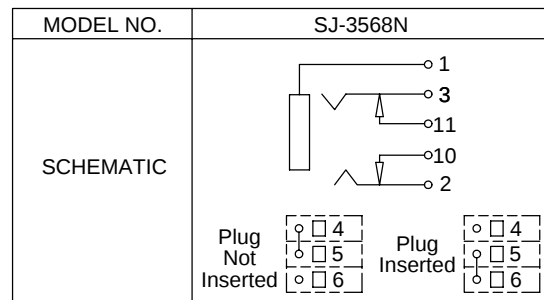

SPECIFICATIONS:

RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	MATERIAL	PLATING
TERMINAL 1	Copper Alloy	Tin
TERMINAL 2	Copper Alloy	Tin
TERMINAL 3	Copper Alloy	Tin
TERMINAL 4-6	Brass	Silver
TERMINAL 10	Brass	Silver
TERMINAL 11	Brass	Silver
BUSHING	Brass	Tin
HOUSING	PBT	Nickel
INSULATOR	PBT	



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE: 3.5mm AUDIO JACK STEREO	REV: A
PART NO. SJ-3568N	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 2:1

PC FILE NAME:
SJ-3568N

COPYRIGHT 2006 BY CUI INC.