

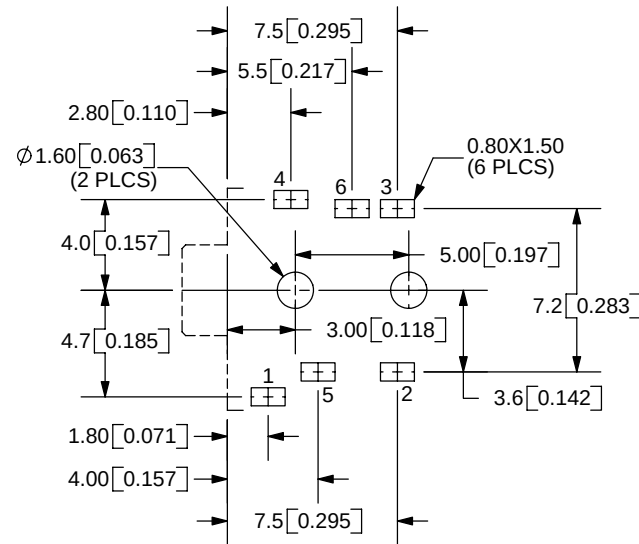
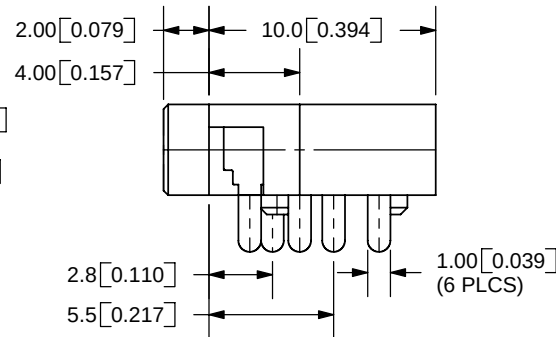


REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/2/2005

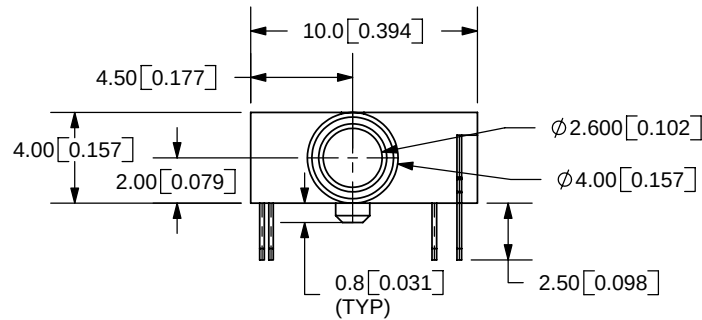

PCB LAYOUT
TOP VIEW

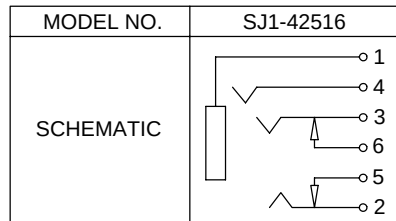

SPECIFICATIONS:

RATING: 16V DC @ 300mA


CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 50M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

	MATERIAL	PLATING
TERMINAL 1	Copper Alloy	Gold Flash
TERMINAL 2	Copper Alloy	Gold Flash
TERMINAL 3	Copper Alloy	Gold Flash
TERMINAL 4	Copper Alloy	Gold Flash
TERMINAL 5	Brass	Gold Flash
TERMINAL 6	Brass	Gold Flash
HOUSING	PA66	



TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm



CUI INC

9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE:	AUDIO JACK W/4 CONDUCTORS 2.5mm		REV:	A
PART NO.	SJ1-42516		UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	SCALE: 3:1	

PC FILE NAME:
SJ1-42516

COPYRIGHT 2005 BY CUI INC.