

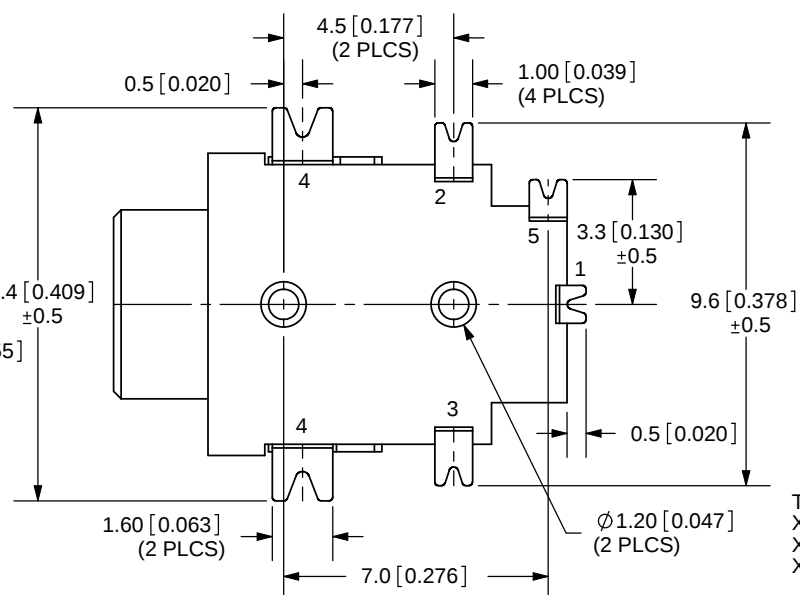
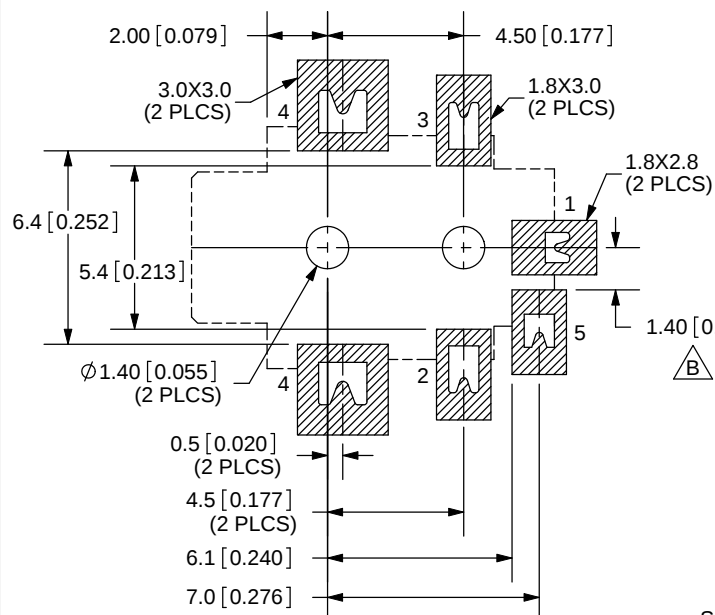
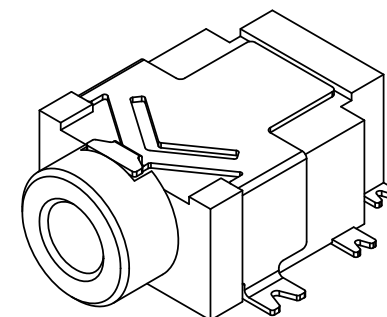


REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/2/2005
B	corrected dimension from 2.8mm to 1.4mm	7/29/2008

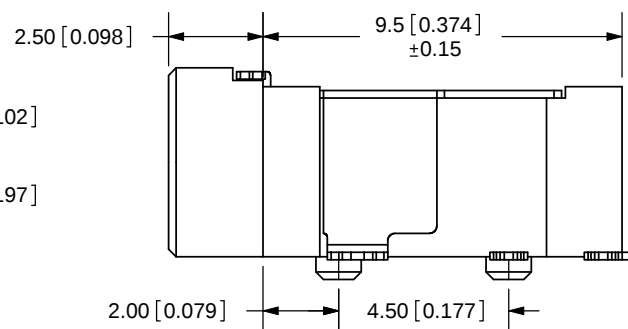

TOLERANCE:
X.X±0.2mm
X.XX±0.1mm
X.XXX±0.05mm

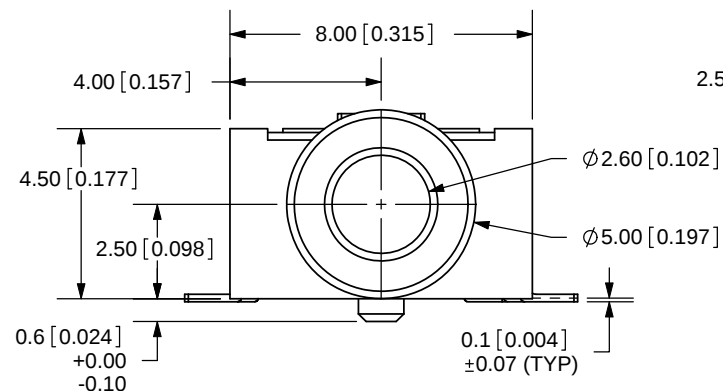

SPECIFICATIONS:
RATING: 16V DC @ 300mA
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	MATERIAL	PLATING
TERMINAL 1	Copper Alloy	Silver
TERMINAL 2	Copper Alloy	Silver
TERMINAL 3	Copper Alloy	Silver
TERMINAL 4	Copper Alloy	Silver
TERMINAL 5	Brass	Silver
HOUSING	PA6T	

MODEL NO.	SJ1-42535TS-SMT
SCHEMATIC	

PC FILE NAME:
SJ1-42535TS-SMT

COPYRIGHT 2008 BY CUI INC.



CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE:	SMT AUDIO JACK W/4 CONDUCTORS 2.5mm	REV:	B
PART NO.	SJ1-42535TS-SMT	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	4:1