

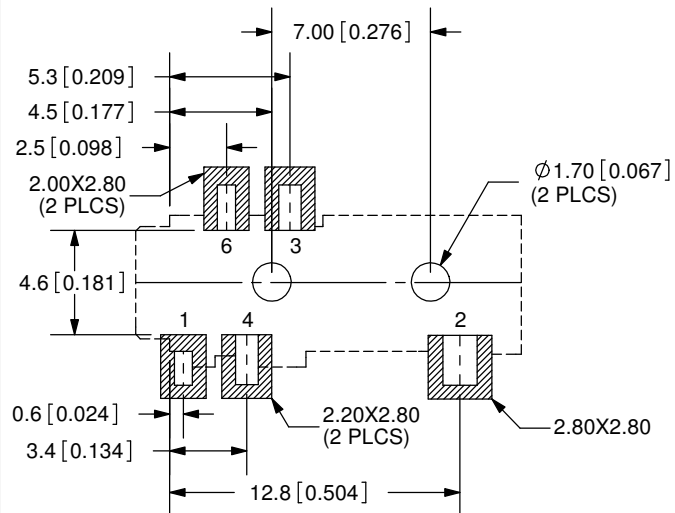
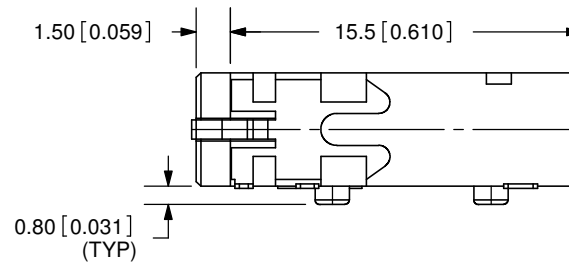
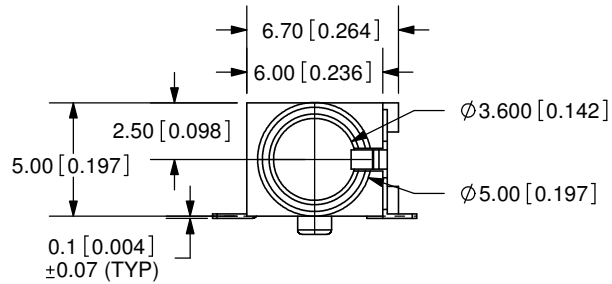


| REV. | DESCRIPTION        | DATE      |
|------|--------------------|-----------|
| A    | NEW DRAWING        | 1/17/2006 |
| B    | Rear cover removed | 3/20/2007 |

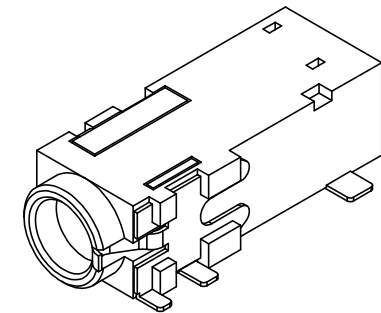

PCB LAYOUT  
TOP VIEW

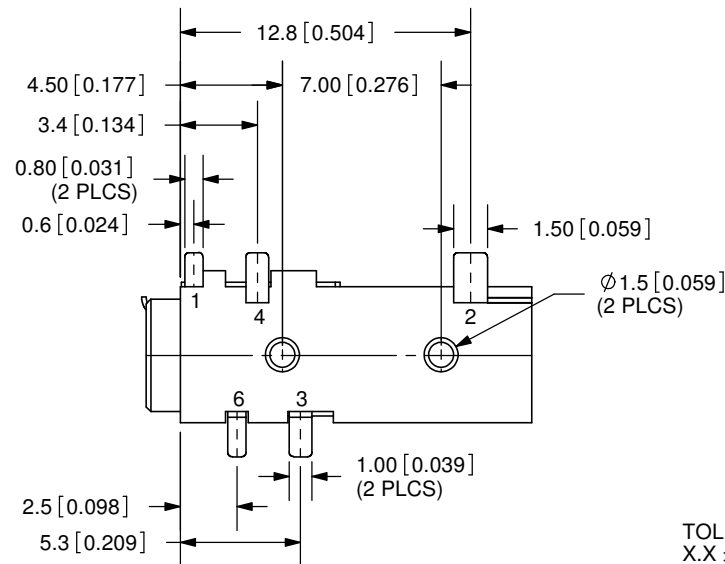

TOLERANCE:  
X.X ±0.2mm  
X.XX ±0.1mm  
X.XXX ±0.05mm



SPECIFICATIONS:  
RATING: 12V DC @ 1A  
CONTACT RESISTANCE: 30m OHMS MAX  
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC  
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
LIFE: 5,000 CYCLES

|            | MATERIAL     | PLATING |
|------------|--------------|---------|
| TERMINAL 1 | Copper Alloy | Silver  |
| TERMINAL 2 | Copper Alloy | Silver  |
| TERMINAL 3 | Copper Alloy | Silver  |
| TERMINAL 4 | Copper Alloy | Silver  |
| TERMINAL 6 | Brass        | Silver  |
| HOUSING    | PA6T         |         |



**CUI INC**

20050 SW 112th Ave.  
Tualatin, OR 97062  
Phone: 503-612-2300  
800-275-4899  
Fax: 503-612-2383  
Website: www.cui.com

| MODEL NO. | SJ-43515RS-SMT |
|-----------|----------------|
| SCHEMATIC |                |

|           |                                     |              |             |
|-----------|-------------------------------------|--------------|-------------|
| TITLE:    | SMT AUDIO JACK W/4 CONDUCTORS 3.5mm | REV:         | B           |
| PART NO.  | SJ-43515RS-SMT                      | UNITS:       | MM [INCHES] |
| DRAWN BY: | ZRJ                                 | APPROVED BY: |             |
|           |                                     | SCALE:       | 3:1         |

PC FILE NAME:  
SJ-43515RS-SMT

COPYRIGHT 2007 BY CUI INC.