
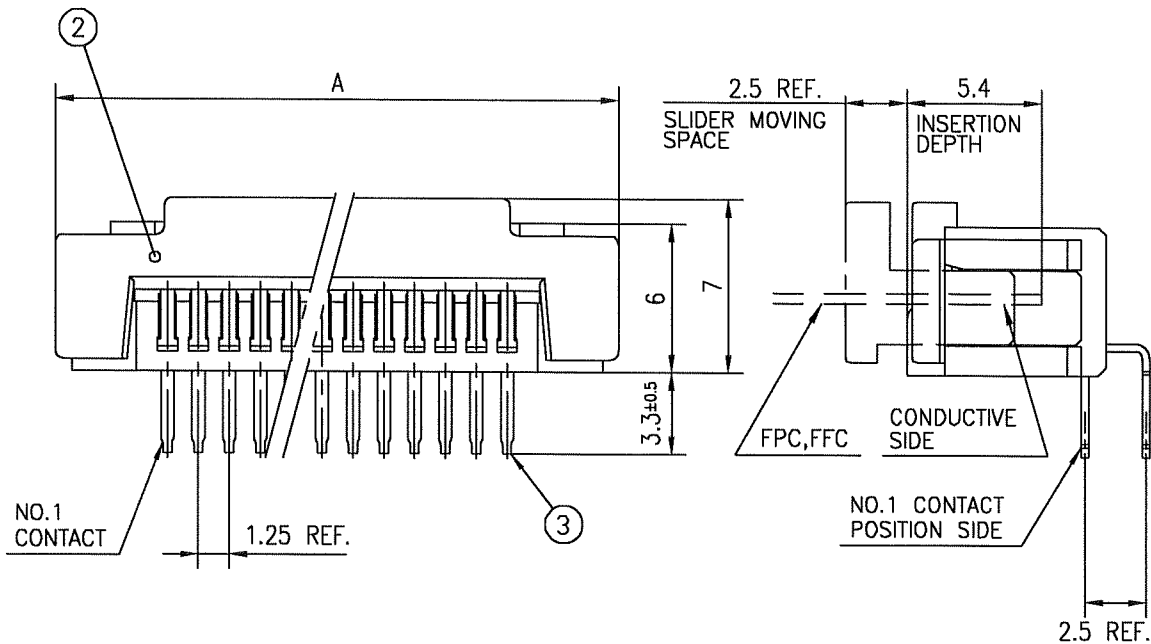


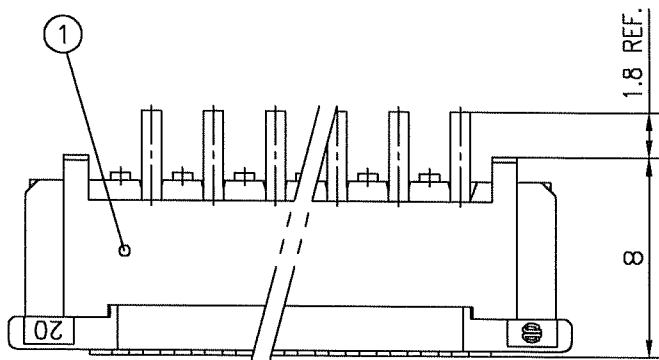

1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

2. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PBT RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER		1	
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : Sn Ni UNDER PLATED (LEAD FREE)

n : NO. OF CONTACTS

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection		product family 58KF		CODE JP
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		mm		title 1.25mm SPACING FPC/FFC CONNECTOR (Cat. No. SLD__R-2LF)		
A	J05-0435	H.T	7/8/'05	angles	linear	±0.3		scale		dwg no JSA 96551 sheet 1 of 1 size A4		
B	J05-0733	H.T	10/28/'05							type Product Customer Drawing		
C	J06-0503	H.T	11/28/'06									
				dr	11/28/06		FCI					
				enr	11/28/06							
				chr	11/28/06							
				app	11/28/06							
sheet index	revision	C	1									
Rev. C												

SC-SLD02 JSA9654B 96552 91B23 form: A4