



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

SM5817PL THRU SM5819PL

Schottky Barrier Diodes 20 to 40 Volts

Features

- High Surge Capability
- Low Forward Voltage
- Low Profile Package
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)

Mechanical Data

- Packaging: Powerlite-123
- Marking Code: SM5817PL---K2; SM5818PL---K3 ; SM5819PL---K4
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL rating 1

Maximum Ratings


Symbol	Rating	Rating	Unit
V_{RMS}	Maximum RMS Voltage	SM5817PL SM5818PL SM5819PL	14 21 28
			V
V_{RRM}	Repetitive Reverse Voltage	SM5817PL	20
		SM5818PL	30
		SM5819PL	40
			V
$I_{F(AV)}$	Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_L=90^{\circ}C$		1.0
			A
I_{FSM}	Surge Forward Current at $T_L=70^{\circ}C, 8.3ms$		30
			A
$R_{\theta JL}$	Typical Thermal Resistance(Note2)		80
			$^{\circ}C/W$
T_J	Junction Temperature		-65 to +125
			$^{\circ}C$
T_{STG}	Storage Temperature		-65 to +125
			$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
V_F	Forward Voltage (@1A dc)				V
		SM5817PL	0.45	---	
		SM5818PL SM5819PL	0.56 0.60	---	
I_R	Leakage Current				mA
		@ $T_A=25^{\circ}C$	---	0.1	
		@ $T_A=100^{\circ}C$	---	9.0	
C_j	Typical Junction Capacitance @ $f=1.0MHz, V_r=4V$	---	110	---	pF

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.
2. Thermal Resistance : PC Board Mounted on 0.2*0.2"(5*5mm) copper pad area.

Powerlite-123

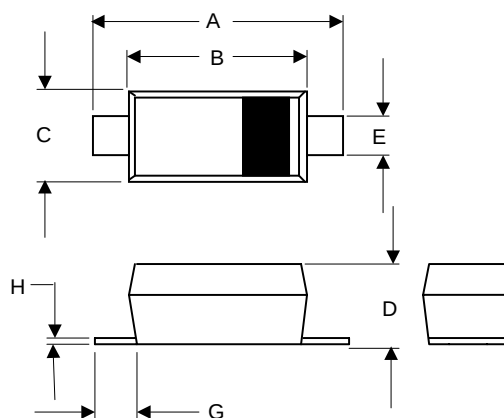

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	.037	.053	0.95	1.35	
E	.020	.039	0.50	1.00	
G	.010	-----	0.25	-----	
H	-----	.008	-----	.20	

SUGGESTED SOLDER PAD LAYOUT

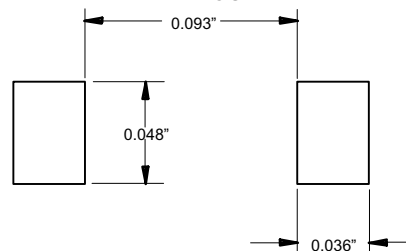


Fig. 1-TYPICAL FORWARD CURRENT

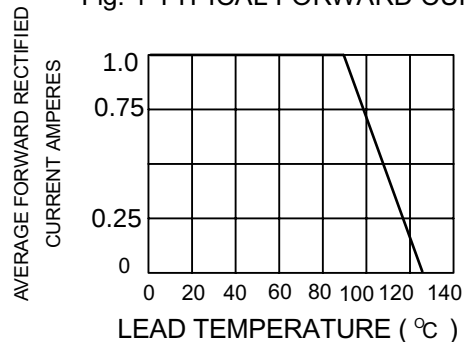


Fig. 2-TYPICAL FORWARD CHARACTERISTICS

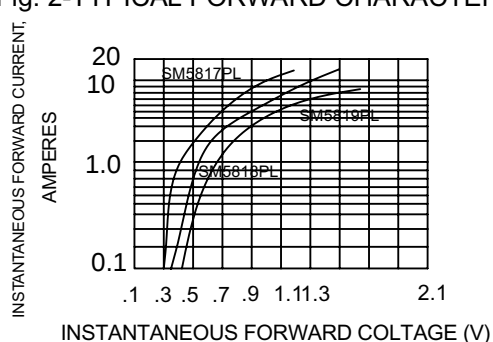


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

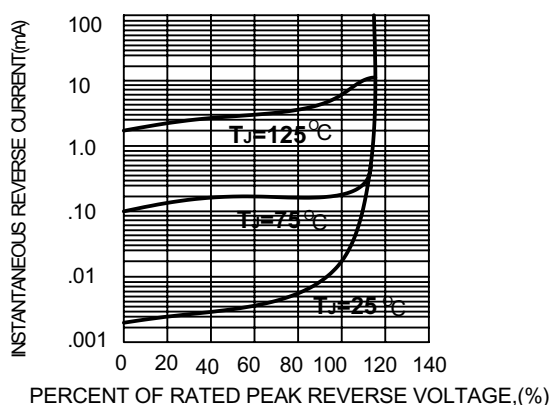


Fig. 4-FORWARD SURGE CURRENT


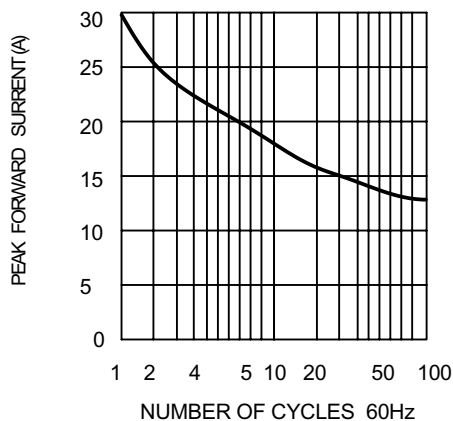


Fig. 5-TYPICAL JUNCTION CAPACITANCE



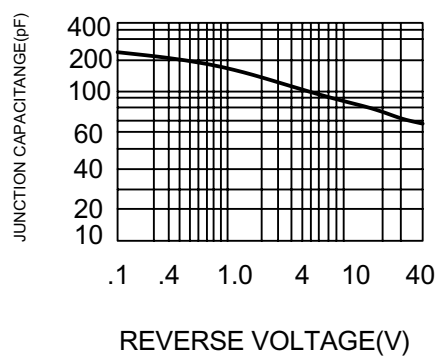

Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;2.5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .

Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com