
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.


© 2003, Projects Unlimited Inc.


**SPECIFICATIONS** 

PARAMETERS	VALUES	UNITS
RATED VOLTAGE (SQUARE WAVE)	3.6	Vp-p
OPERATING VOLTAGE RANGE	2.5 ~ 4.5	Vp-p
RATED CURRENT (MAX)	90	mΑ
COIL RESISTANCE	15±3	ОНМ
MINIMUM SPL @ 10 CM	85	dBA
RESONANT FREQUENCY	2,500±500	Hz
OPERATING TEMPERATURE	−30 ~ +70	ů
STORAGE TEMPERATURE	-40 ~ +85	°C
HOUSING MATERIAL	LCP	ı
TERMINAL MATERIAL	Tin Plated Phosphor Bronze	-
WEIGHT	.4	grams

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	4/1/05	
Α	ADDED RoHS COMPLIANCE NOTE	8/10/05	

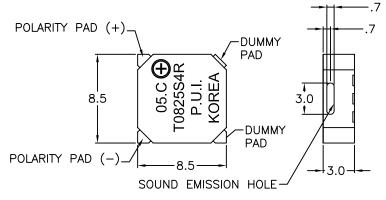



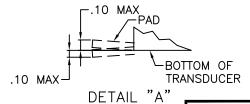

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/ 95/EC COMPLIANT.

	MILLIMETERS, TOLERANCES ARE ±0.5 AND		
١	ANGLES ARE ±3°.		
1	APPROVALS	DATE	TR A
	DRAWN G. V.	3/31/05	
	CHECKED E.P.	4/1/05	SIZE
	APPROVED R.W.	4/1/05	A
3	DO NOT SCALE DRAWING		SCAL

UNLESS OTHERWISE SPECIFIED:

TRANSDUCER (ELECTRO-MECH)

Dayton , Ohio

projects ® unlimited

DRAWING NO.
SMT-0825-S-4-R

SMT-0825-S-4-R.DWG

LE: N.T.S. SHEET 1 OF