
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

SPE	ECI	FIC	ΑΤΙ	ON	S

PARAMETERS	VALUES	UNITS
RATED VOLTAGE (SQUARE WAVE)	5	Vp-p
OPERATING VOLTAGE RANGE	4 ~ 8	Vp-p
RATED CURRENT (MAX)	40	mA
COIL RESISTANCE	47±5	ОНМ
MINIMUM SPL @ 10 CM	85	dBA
RESONANT FREQUENCY	2400±500	Hz
OPERATING TEMPERATURE	−20 ~ +85	°C
STORAGE TEMPERATURE	−30 ~ +80	°C
HOUSING MATERIAL	NORYL	_
TERMINAL MATERIAL	Sn PLATED BRASS	_
WEIGHT	5	grams

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	1/16/06	

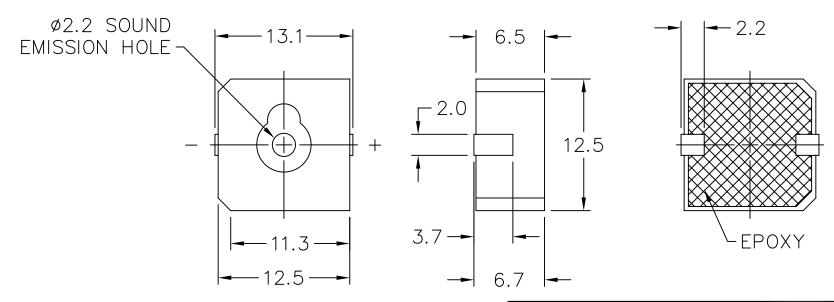

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

FILE NAME	
SMT-1324-TW-5V-R.DWG	;

	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3'.  APPROVALS  DATE  DRAWN  A C		projects ® unlimited Dayton , Ohio						
			TRANSDUCER (ELECTRO-MEC			CH)			
	J.A.F.	01/06							
	CHECKED E.P.	x/xx	SIZE			RAWING N		E\/ [	ιl
	APPROVED B.R.	x/xx	L A	SMT-1324-TW-5V-R			۲		
/G	DO NOT SCALE DRA	AWING	SCALE: N.T.S.				SHEET 1	OF	1