


PART NUMBER CODING
S_C02SYAN

PLATING
T= TIN OVER COPPER UNDERPLATE OVERALL.
P= GOLD FLASH OVER NICKEL UNDERPLATE OVERALL.
S= 0.000010" GOLD OVER NICKEL UNDERPLATE OVRALL.

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
A	1764	INITIAL RELEASE	07/23/08	ASK
B	1821	UPDATE 'T' & 'P' PLATING, ADD 'S' PLATING, CURRENT RATING 3 AMP WAS 1 AMP, ADD 'DUAL BEAM CONTACTS' TEXT, .226 MAX DEPTH WAS .236, LENGTH .200 WAS .197, WIDTH .100 WAS .094 REMOVE TEXT '-RC' IN P/N CODING	11/4/2008	JH

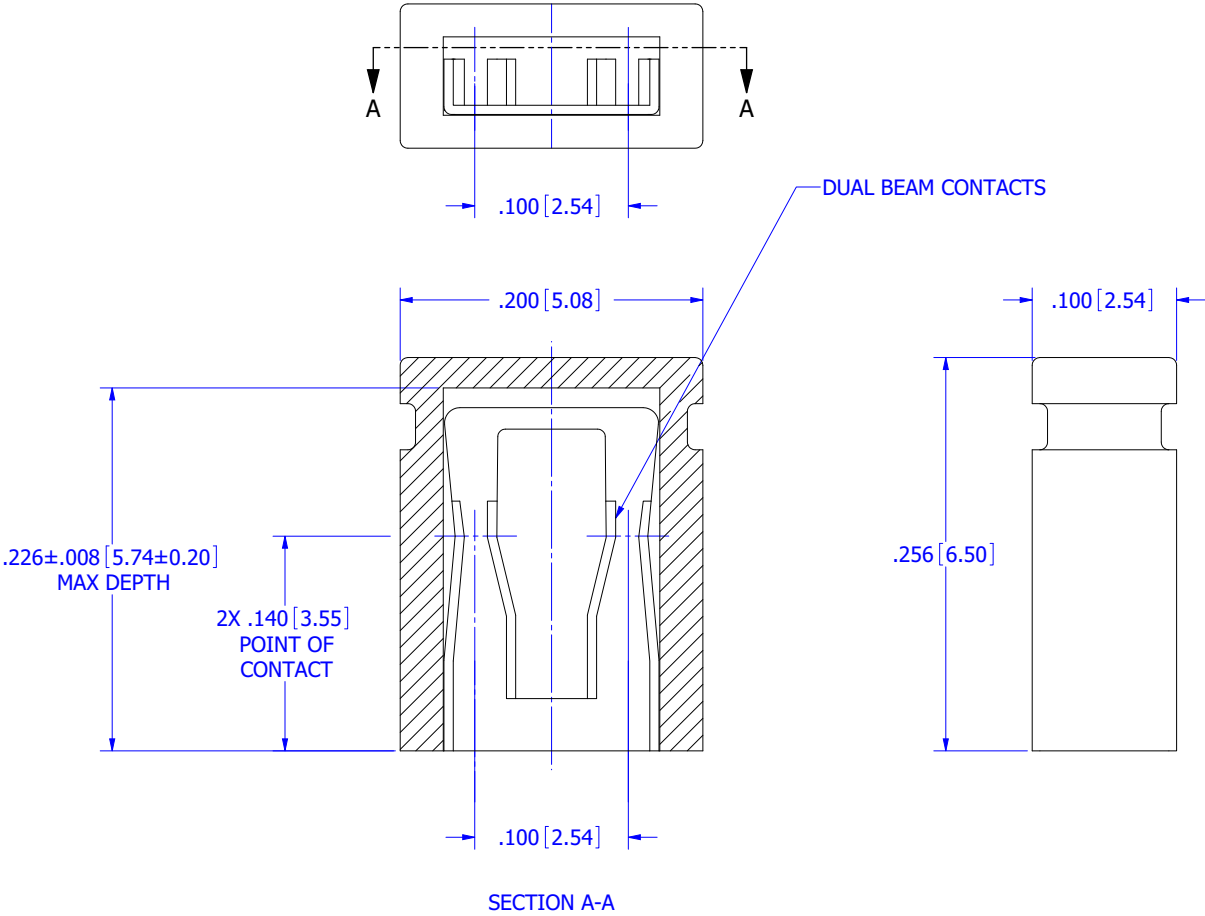

- NOTES:
1. INSULATOR MATERIAL: PBT, BLACK
 2. CONTACT MATERIAL: PHOSPHOR BRONZE.
 3. PLATING: SEE PART NUMBER CODING.
 4. OPERATING TEMPERATURE: -55°C TO +105°C.
 5. OPERATING VOLTAGE: 250 VAC MAX.
 6. UL FLAMMABILITY RATING: 94V-0.
 7. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC FOR 1 MINUTE.
 8. CURRENT RATING: 3 AMP PER CONTACT.
 9. CONTACT RESISTANCE: 20 MEGA OHMS MAX.
 10. INSULATION RESISTANCE: 5000 MEGA OHMS.



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES[MM] TOLERANCES: ANGULAR: ± 30° .X=± .10 [2.54] .XX=± .02 [508] .XXX=± .015 [381] INTERPRET DIMENSIONS AND GEOMETRIC TOLERANCING PER: ANSI Y14.5M-1994	DATE 07/23/08	NAME ASK	
	THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.		
	DESCRIPTION MINI SHUNT, CLOSED TOP		
	PART NUMBER S_C02SYAN		
	SIZE C	DWG. NO. 11134	REV B
	SCALE: 24:1		SHEET 1 OF 1