

Features

- Ideally Suited for ESD Protection
- Ultra-Small Surface Mount Package
- Excellent Clamping Capability, Fast Response Time
- Low Capacitance
- **Lead Free By Design/RoHS Compliant (Note 1)**
- **"Green" Device (Note 2)**

Mechanical Data

- Case: SOD-523
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminal Connections: Cathode Band
- Terminals: Solderable per MIL-STD-202, Method 208
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Marking Information: See Page 2
- Ordering Information: See Page 2
- Weight: 0.001 grams (approximate)



Top View

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic		Symbol	Value	Unit
Forward Voltage @ I _F = 10mA		V _F	0.9	V
ESD Rating	Human Body Model	ESD	8	kV
	Machine Model		400	V
	IEC61000-4-2 Air Discharge		30	kV
	IEC61000-4-2 Contact Discharge		30	kV



Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 3) (See figure 2)	P _D	150	mW
Thermal Resistance, Junction to Ambient Air (Note 3)	R _{θJA}	833	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150	°C

Electrical Characteristics @T_A = 25°C unless otherwise specified

Part Number	Reverse Standoff Voltage	Min. Breakdown Voltage V _{BR} @ I _T	Test Current	Max. Reverse Leakage @ V _{RWM} (Note 4)	Typ. Clamping Voltage @ I _{PP} = 5A (t _p = 8 x 20 μs) (See figure 1)	Max. Clamping Voltage V _C @ I _{PP} (t _p = 8 x 20 μs) (See Figure 1)		Max. Clamping Voltage V _C @ I _{PP} (t _p = 8 x 20 μs) (See Figure 1)		Peak Power Dissipation (See Figure 1)	Typical Total Capacitance V _R = 0V f = 1MHz	Marking Code
	V _{RWM} (V)	Min (V)	I _T (mA)	I _R (μA)	V _C (V)	V _C (V)	I _{PP} (A)	V _C (V)	I _{PP} (A)	P _{PK} (W)	C _T (pF)	
T3V3S5	3.3	5.0	1.0	1	8.4	14.1	11.2	16	16	220	85	ED
T5V0S5	5.0	6.2	1.0	0.05	15	22	9.4	27	15	260	60	EJ
T6V0S5	6.0	6.8	1.0	0.05	11.2	17	8.8	23	15	260	90	EL
T12S5	12	14.1	1.0	0.01	19.7	25	9.6	28	12	300	60	ES

- Notes:
1. No purposefully added lead.
 2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 3. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 4. Short duration pulse test used to minimize self-heating effect.

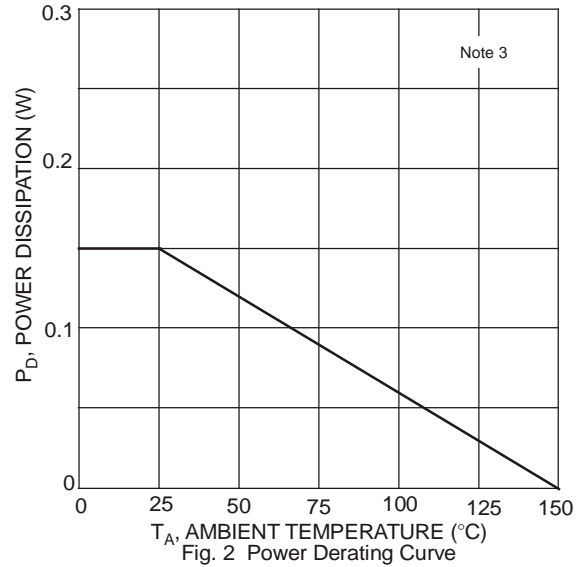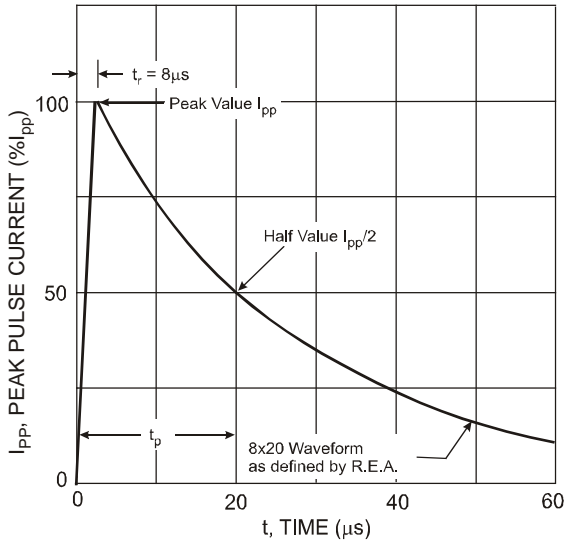

Ordering Information (Note 5)

Part Number (Type Number)-7*	Case SOD-523	Packaging 3000/Tape & Reel
---------------------------------	-----------------	-------------------------------

* Add "-7" to the appropriate type number in Electrical Characteristics Table on page 1 example: 2.5V TVS = T2V5S5-7.


Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information




xx = Product Type Marking Code
(See Electrical Characteristics Table)

Package Outline Dimensions

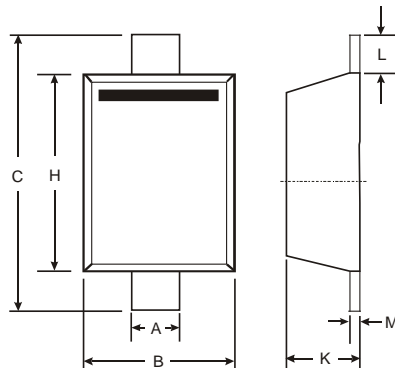

SOD-523		
Dim	Min	Max
A	0.25	0.35
B	0.70	0.90
C	1.50	1.70
H	1.10	1.30
K	0.55	0.70
L	0.10	0.30
M	0.10	0.20
All Dimensions in mm		

Suggested Pad Layout



Dimensions	Value (in mm)
Z	2.3
G	1.1
X	0.8
Y	0.6
C	1.7

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.